

- Scope
1. Furnish and install perimeter linear supply diffusers (48") along the window walls on floors 29, 30 and 31, as shown in the clouds on shop drawings M-529 / M-530 / M-531 SD R2.

2. Each diffuser in a plenum box O.D. 48x4x26 with 1/2" lining, connected with a new 12x10 branch (one 10x8) with volume damper and concealed operator (VD/CO), tapped into the existing perimeter supply main.

3. Existing perimeter mains remain; work starts at the new taps. Branch duct insulated, sealed and supported.

4. Air balancing of the new diffusers and revised shop drawings included per floor.

- Exclusions
1. Soffit and ceiling openings, framing, access panels, patching and painting.

2. Relocation of any lights, electrical wires, j-boxes, or any other trades work that could be discovered after soffits will be opened.


Summary by floor

Floor	Linear diffusers	Material	Labor	Foreman	Air balancing	Shop drawings	Total
29th floor (M-529)	23	\$13,455	\$15,812.50	\$4,650	\$2,500	\$1,500	\$37,917.50
30th floor (M-530)	12	\$7,020	\$8,250	\$2,325	\$1,200	\$750	\$19,545
31st floor (M-531)	14	\$8,190	\$9,625	\$2,325	\$1,200	\$750	\$22,090
Total	49	\$28,665	\$33,687.50	\$9,300	\$4,900	\$3,000	\$79,552.50

Labor 269.5 MH at \$125.00; foreman 60 hr at \$155.00.

Change areas

Area	Location	Diffusers	CFM
29-1	North-east corner, W 42nd St / Broadway	4	1,200
29-2	Seventh Ave, north	3	800
29-3	Seventh Ave, Open Office 29.42	6	1,600
29-4	Broadway, north	2	400
29-5	Seventh Ave, south (north end of sheet B)	4	1,200
29-6	Seventh Ave, south	4	1,200
30-1	Seventh Ave, north	3	800
30-2	Seventh Ave, Open Office 30.35	5	1,300
30-3	South wall (W 41st St side)	4	1,200
31-1	Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51)	2	400
31-2	Seventh Ave, Huddle Rms 31.46 / 31.47	3	800
31-3	Seventh Ave, at IDF 31.44 (match line)	1	300
31-4	Seventh Ave, 7P Meeting Rm 31.43	3	900
31-5	Seventh Ave, south	3	800
31-6	Broadway, south	2	600
	Total	49	13,500

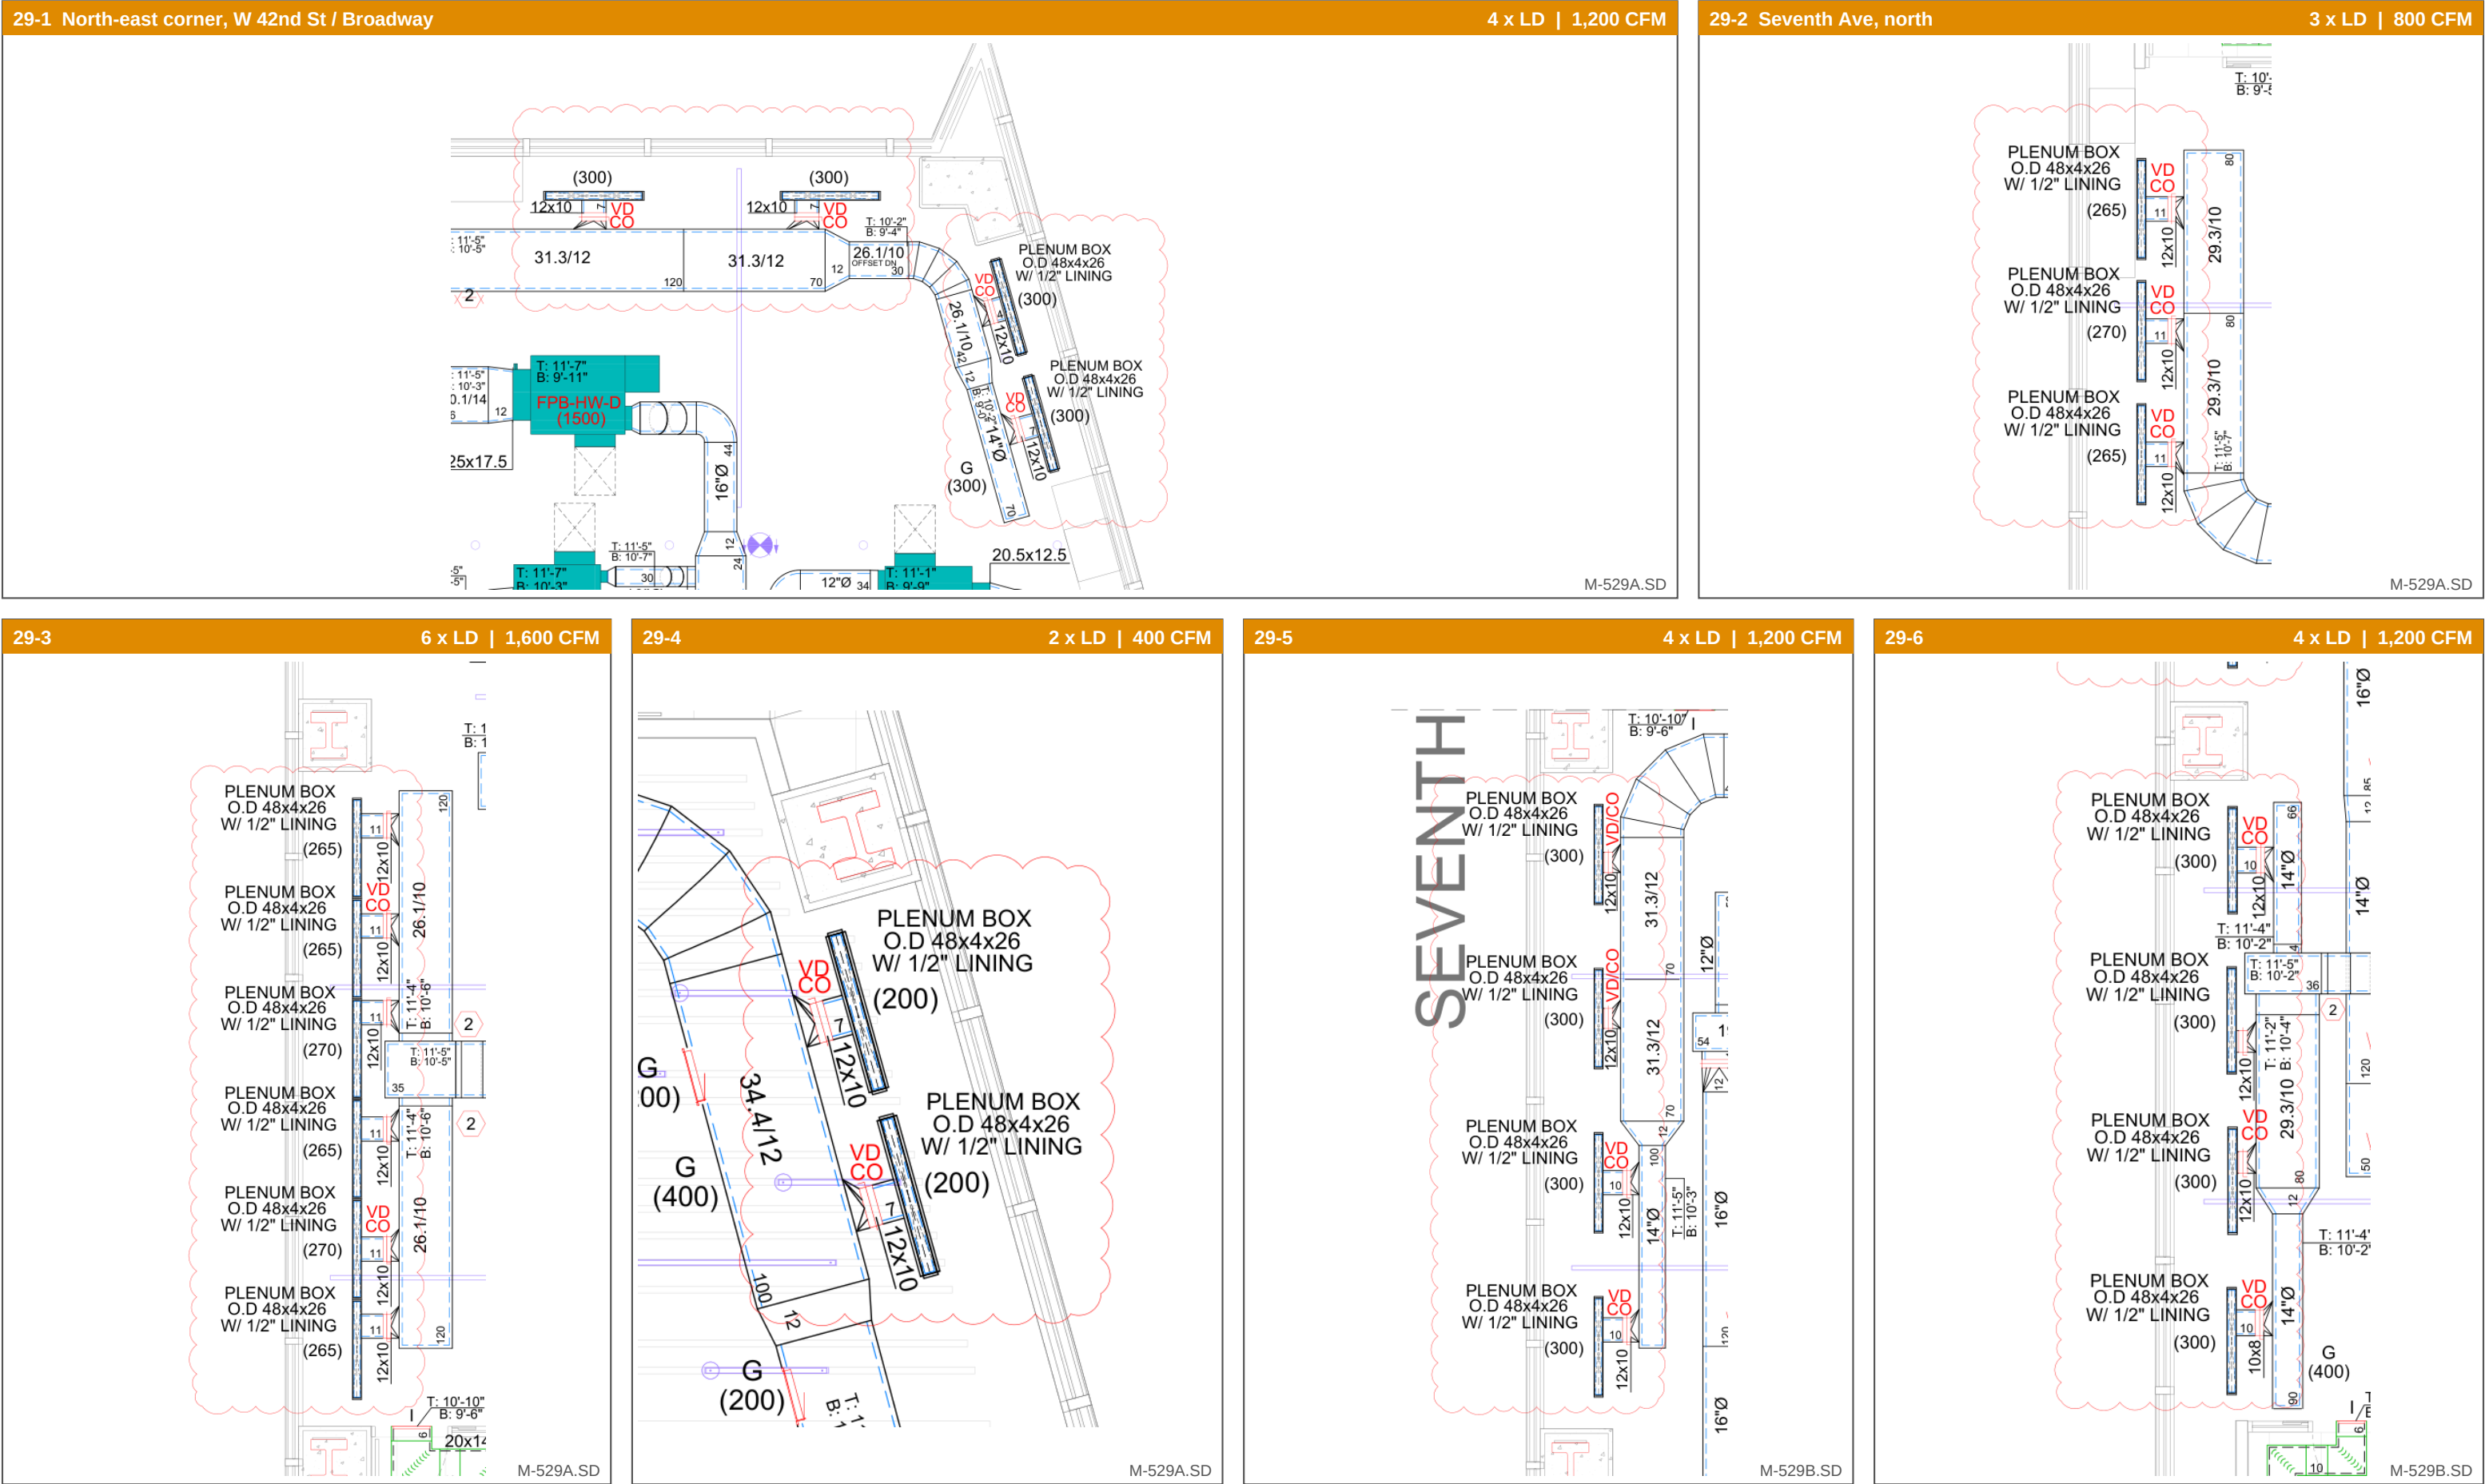

29th Floor - M-529 SD R2: Scope of Work and Cost Breakdown

Labor at \$125.00 per man-hour, foreman \$155.00 per hour | existing perimeter mains remain, work starts at the new taps



Snowflake Fitout - 7 Times Square, Floors 29-31 | Perimeter Linear Diffusers

Area	Scope of work	LD qty	CFM each (total)	Material	Labor	Total
29-1	North-east corner, W 42nd St / Broadway F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 4 x 12x10 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
29-2	Seventh Ave, north F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
29-3	Seventh Ave, Open Office 29.42 F&I 6 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 6 x 12x10 branch with VD/CO, insulation.	6	265 / 265 / 270 / 265 / 270 / 265 (1,600)	\$3,510	33 MH \$4,125	\$7,635
29-4	Broadway, north F&I 2 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 2 x 12x10 branch with VD/CO, insulation.	2	200 / 200 (400)	\$1,170	11 MH \$1,375	\$2,545
29-5	Seventh Ave, south (north end of sheet B) F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 4 x 12x10 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
29-6	Seventh Ave, south F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10, 1 x 10x8 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
	Foreman (layout, soffit coordination, supervision)				30 hr \$4,650	\$4,650
	Air balancing of new diffusers					\$2,500
	Shop drawings for revised design (SD R2)					\$1,500
	29th floor total	23	6,400	\$13,455	\$20,462.50	\$37,917.50

29th floor cost build-up

Item	Qty	Unit	Rate	Amount
Perimeter linear supply diffuser 48" (4 LF each)	92	LF	\$90	\$8,280
Plenum box O.D. 48x4x26 with 1/2" lining	23	EA	\$95	\$2,185
Branch duct from new tap to plenum box, fittings, insulation	23	EA	\$45	\$1,035
Volume damper with concealed operator (VD/CO)	23	EA	\$85	\$1,955
Labor: install diffusers, plenum boxes, taps, branches, VD/CO	126.5	MH	\$125	\$15,812.50
Foreman	30	HR	\$155	\$4,650
Air balancing	1	LS		\$2,500
Shop drawings	1	LS		\$1,500
29th floor total				\$37,917.50

Key plan

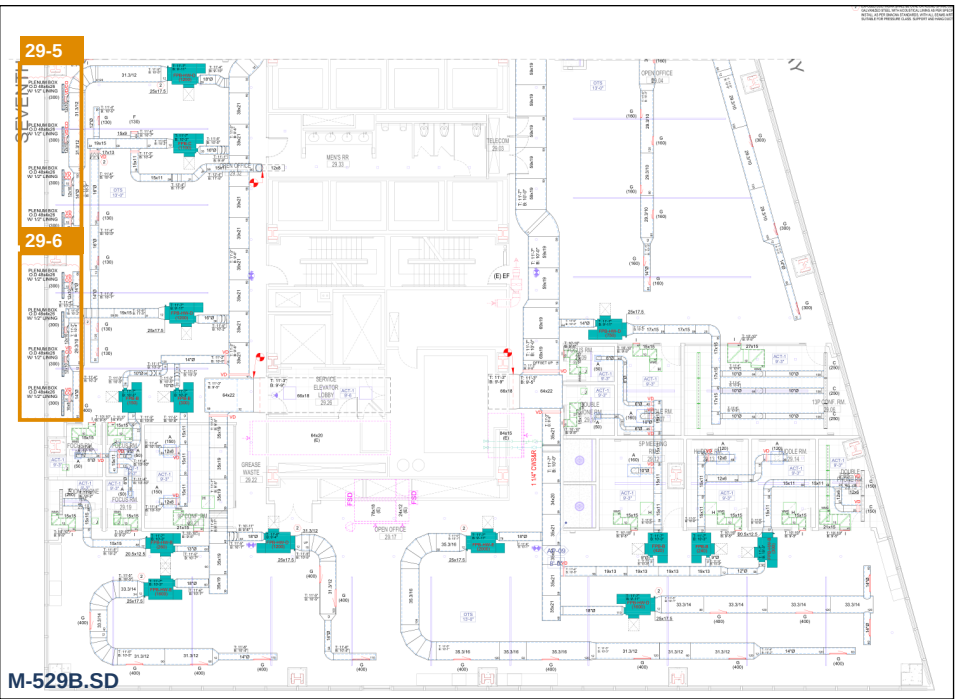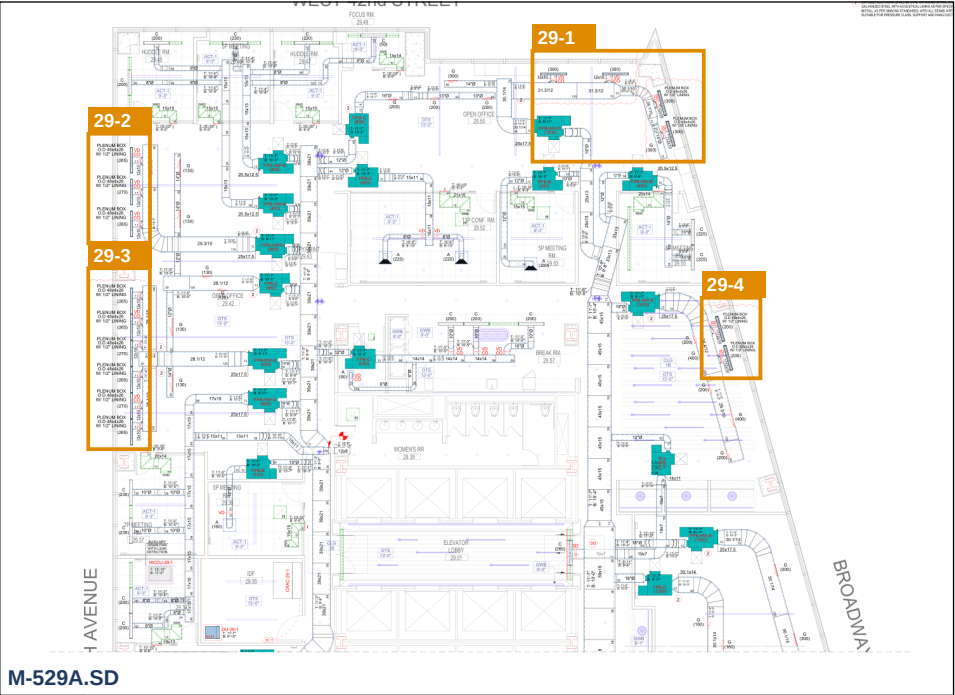

Floor	Total
29th floor	\$37,917.50
30th floor	\$19,545
31st floor	\$22,090
Total	\$79,552.50

NORTHERN WOLVES AC

Snowflake Fitout - 7 Times Square, Floors 29-31 | Perimeter Linear Diffusers



30th Floor - M-530 SD R2: Scope of Work and Cost Breakdown

Labor at \$125.00 per man-hour, foreman \$155.00 per hour | existing perimeter mains remain, work starts at the new taps

Area	Scope of work	LD qty	CFM each (total)	Material	Labor	Total
30-1	Seventh Ave, north F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
30-2	Seventh Ave, Open Office 30.35 F&I 5 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 5 x 12x10 branch with VD/CO, insulation.	5	300 / 300 / 300 / 200 / 200 (1,300)	\$2,925	27.5 MH \$3,437.50	\$6,362.50
30-3	South wall (W 41st St side) F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 4 x 12x10 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
	Foreman (layout, soffit coordination, supervision)				15 hr \$2,325	\$2,325
	Air balancing of new diffusers					\$1,200
	Shop drawings for revised design (SD R2)					\$750
	30th floor total	12	3,300	\$7,020	\$10,575	\$19,545


30th floor cost build-up

Item	Qty	Unit	Rate	Amount
Perimeter linear supply diffuser 48" (4 LF each)	48	LF	\$90	\$4,320
Plenum box O.D. 48x4x26 with 1/2" lining	12	EA	\$95	\$1,140
Branch duct from new tap to plenum box, fittings, insulation	12	EA	\$45	\$540
Volume damper with concealed operator (VD/CO)	12	EA	\$85	\$1,020
Labor: install diffusers, plenum boxes, taps, branches, VD/CO	66	MH	\$125	\$8,250
Foreman	15	HR	\$155	\$2,325
Air balancing	1	LS		\$1,200
Shop drawings	1	LS		\$750
30th floor total				\$19,545

Key plan



M-530A.SD

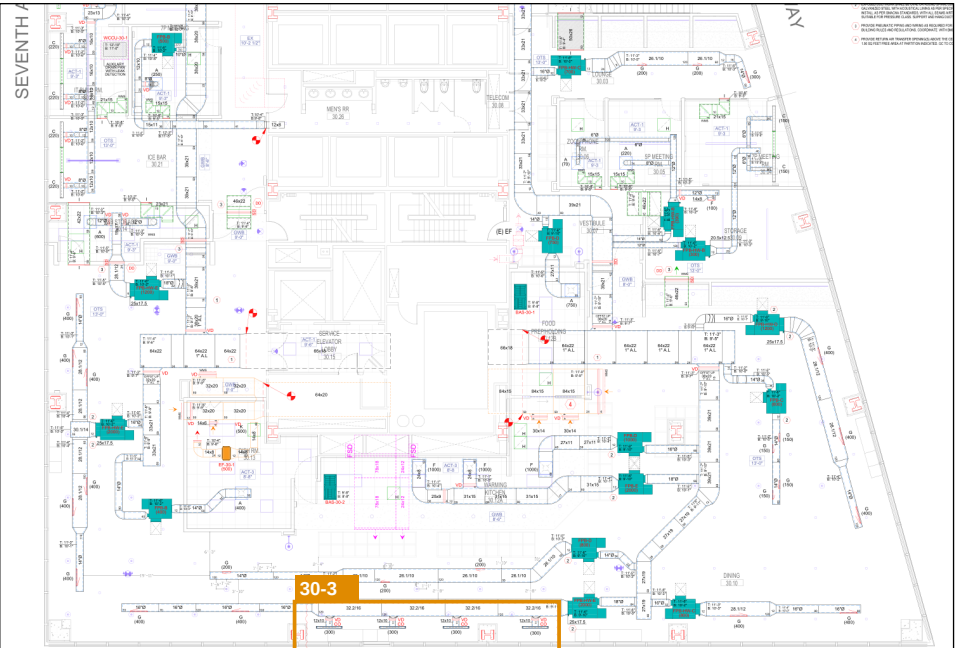


M-530B.SD

Floor	Total
29th floor	\$37,917.50
30th floor	\$19,545
31st floor	\$22,090
Total	\$79,552.50

31-1 Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51)


2 x LD | 400 CFM

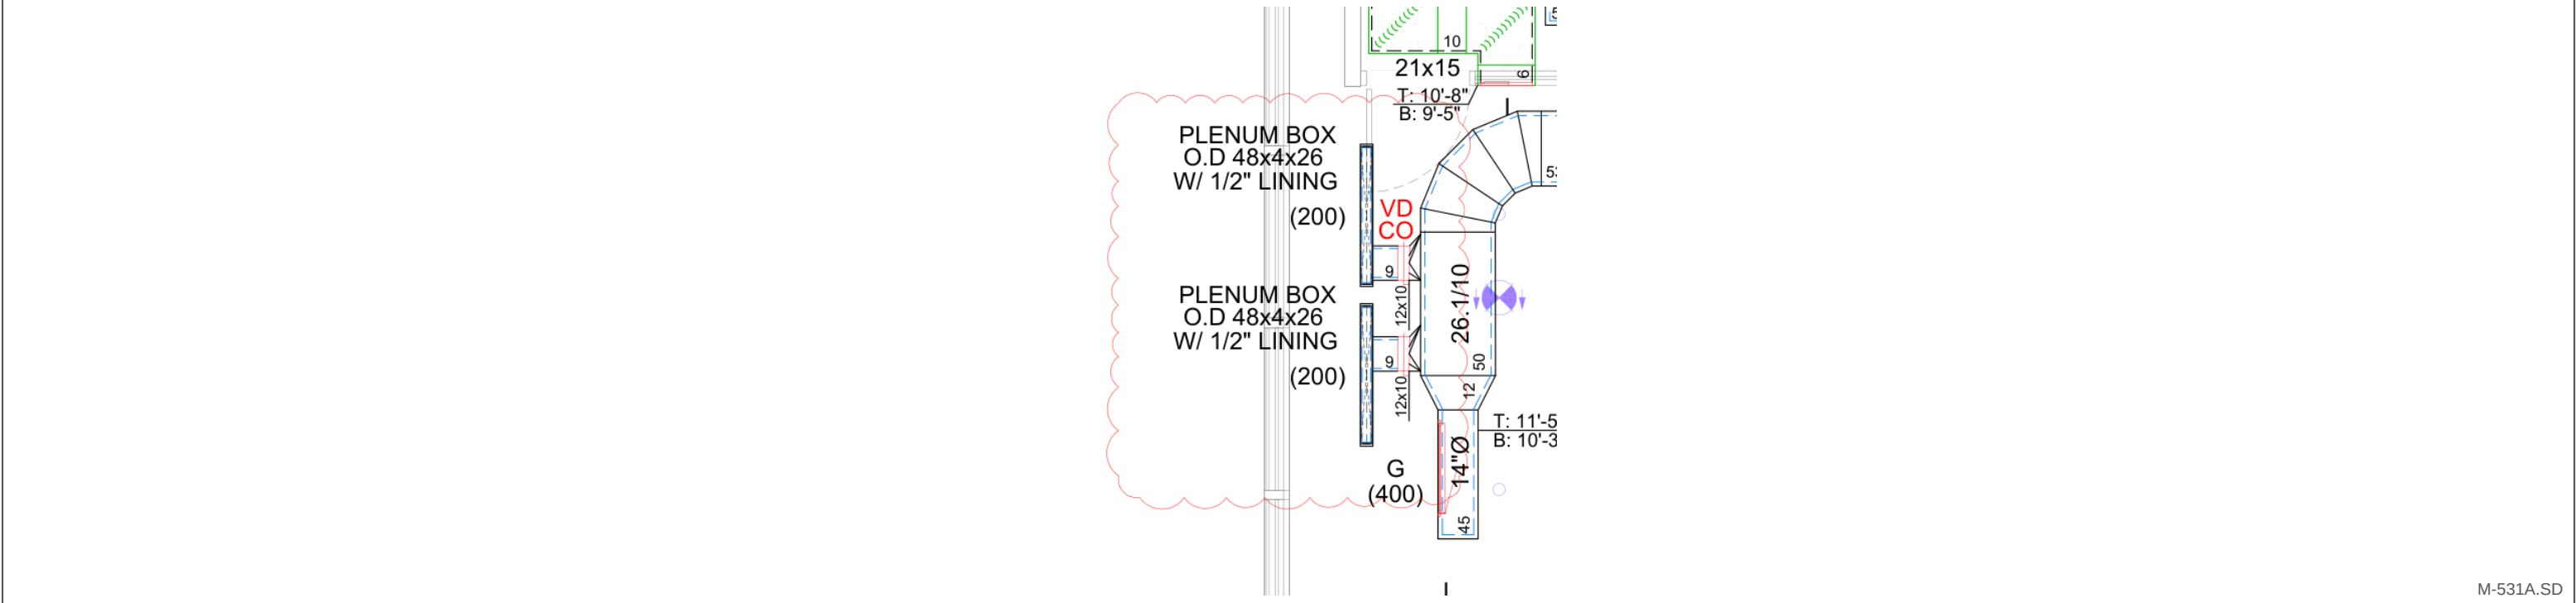

M-531A.SD

31-2


3 x LD | 800 CFM

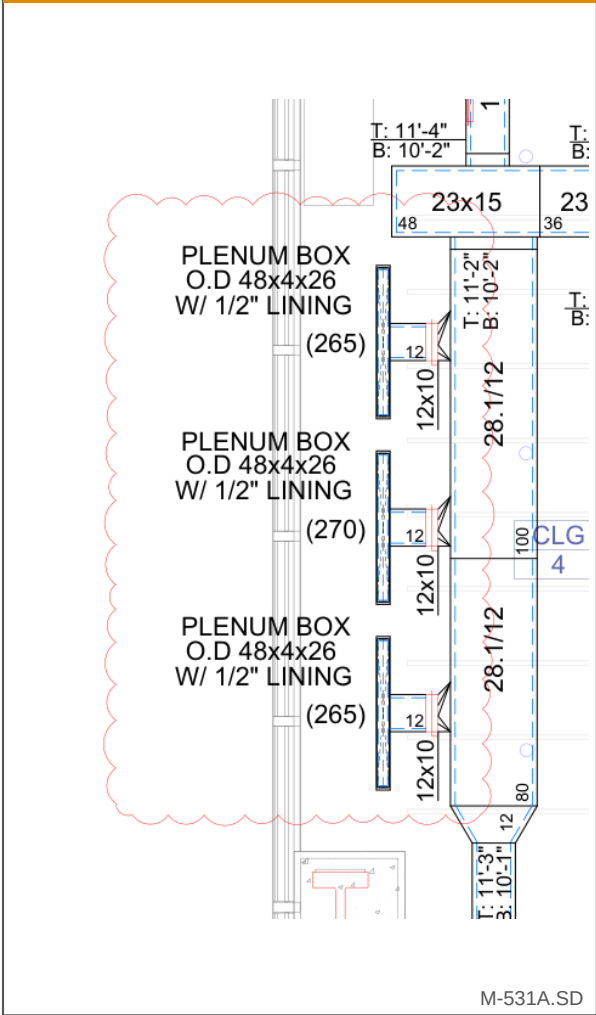

M-531A.SD

31-3


1 x LD | 300 CFM

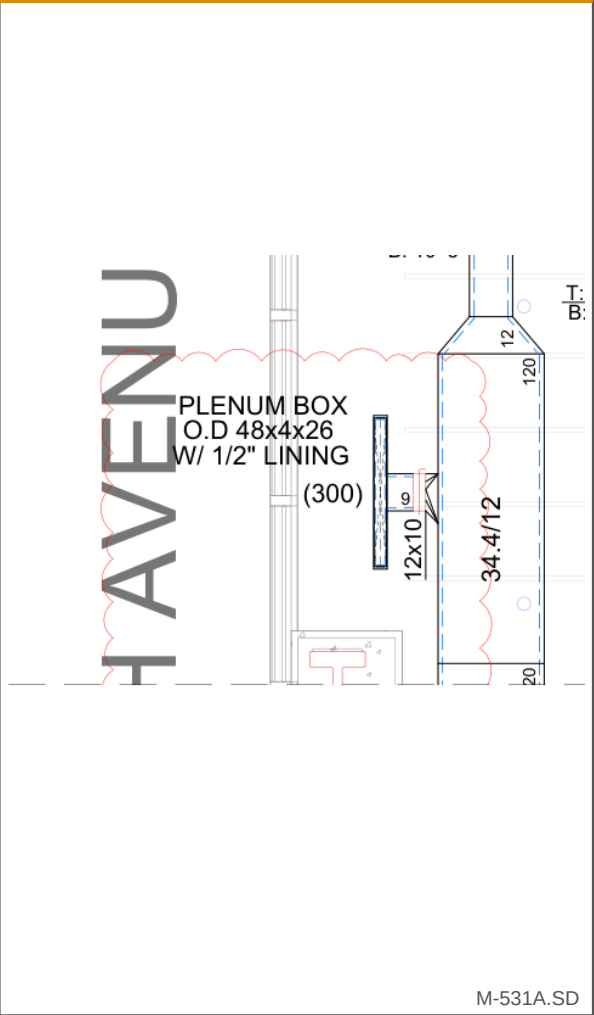

M-531A.SD

31-4


3 x LD | 900 CFM

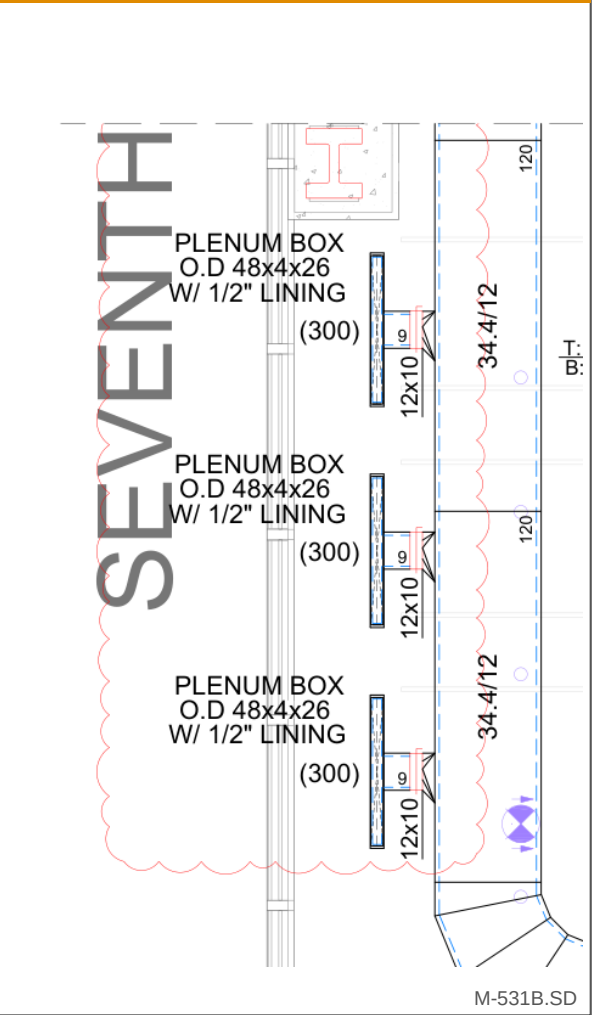

M-531B.SD

31-5


3 x LD | 800 CFM

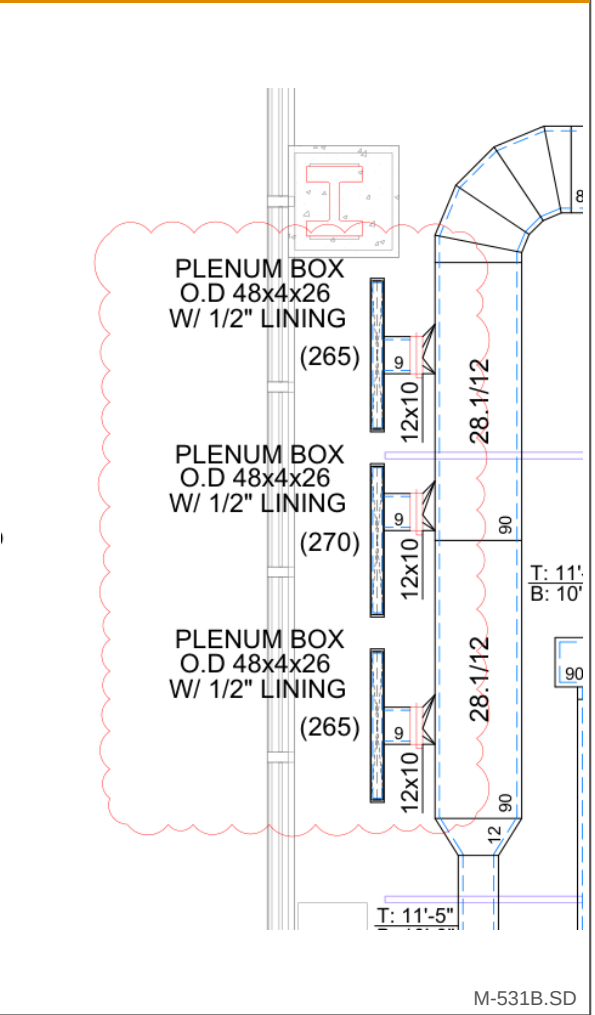

M-531B.SD

31-6

2 x LD | 600 CFM

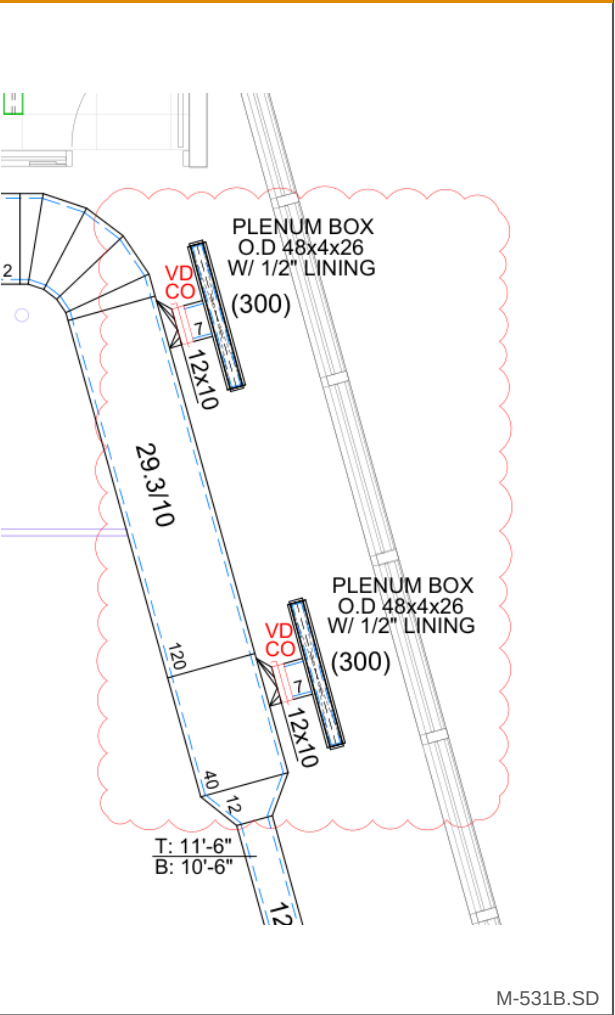

M-531B.SD

31st Floor - M-531 SD R2: Scope of Work and Cost Breakdown

Labor at \$125.00 per man-hour, foreman \$155.00 per hour | existing perimeter mains remain, work starts at the new taps


Snowflake Fitout - 7 Times Square, Floors 29-31 | Perimeter Linear Diffusers

Area	Scope of work	LD qty	CFM each (total)	Material	Labor	Total
31-1	Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51) F&I 2 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 2 x 12x10 branch with VD/CO, insulation.	2	200 / 200 (400)	\$1,170	11 MH \$1,375	\$2,545
31-2	Seventh Ave, Huddle Rms 31.46 / 31.47 F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
31-3	Seventh Ave, at IDF 31.44 (match line) F&I 1 perimeter linear diffuser 48" with plenum box O.D. 48x4x26 lined; new tap on existing main, 1 x 12x10 branch with VD/CO, insulation.	1	300 (300)	\$585	5.5 MH \$687.50	\$1,272.50
31-4	Seventh Ave, 7P Meeting Rm 31.43 F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	300 / 300 / 300 (900)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
31-5	Seventh Ave, south F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
31-6	Broadway, south F&I 2 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 2 x 12x10 branch with VD/CO, insulation.	2	300 / 300 (600)	\$1,170	11 MH \$1,375	\$2,545
	Foreman (layout, soffit coordination, supervision)				15 hr \$2,325	\$2,325
	Air balancing of new diffusers					\$1,200
	Shop drawings for revised design (SD R2)					\$750
	31st floor total	14	3,800	\$8,190	\$11,950	\$22,090


31st floor cost build-up

Item	Qty	Unit	Rate	Amount
Perimeter linear supply diffuser 48" (4 LF each)	56	LF	\$90	\$5,040
Plenum box O.D. 48x4x26 with 1/2" lining	14	EA	\$95	\$1,330
Branch duct from new tap to plenum box, fittings, insulation	14	EA	\$45	\$630
Volume damper with concealed operator (VD/CO)	14	EA	\$85	\$1,190
Labor: install diffusers, plenum boxes, taps, branches, VD/CO	77	MH	\$125	\$9,625
Foreman	15	HR	\$155	\$2,325
Air balancing	1	LS		\$1,200
Shop drawings	1	LS		\$750
31st floor total				\$22,090

Key plan

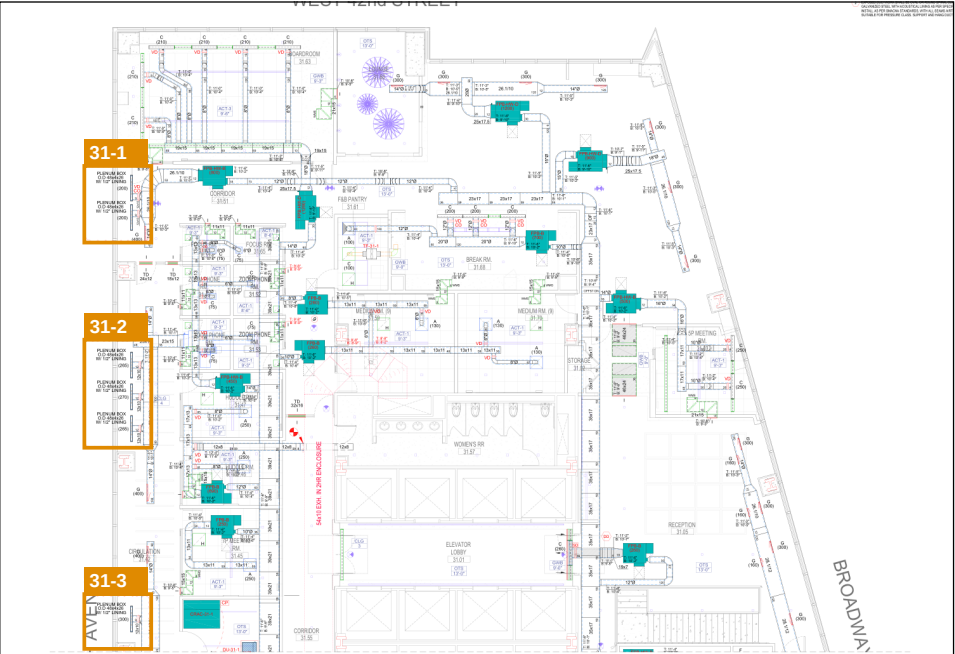

M-531A.SD

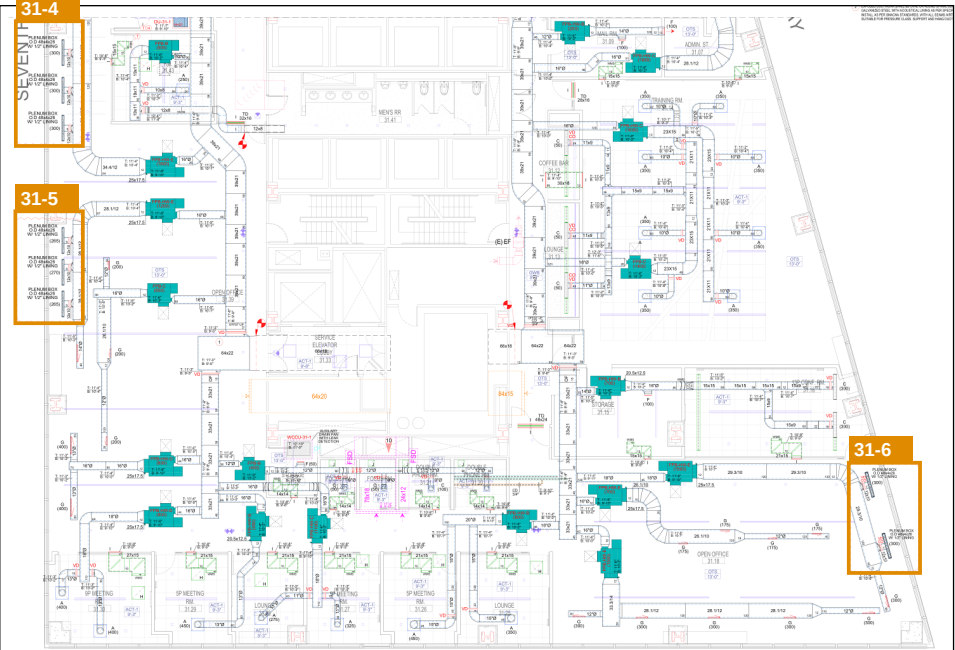

M-531B.SD

Floor	Total
29th floor	\$37,917.50
30th floor	\$19,545
31st floor	\$22,090
Total	\$79,552.50