GENERAL BUILDING CODE NOTES

1. ENERGY CODE COMPLIANCE NOTE:

TO THE BEST OF MY KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGMENT, THE PLANS AND SPECIFICATIONS ARE IN COMPLIANCE WITH 2020 NYCECC

2. PERMITS:

CONTRACTOR SHALL FILE FOR AND OBTAIN PERMITS FOR ALL MECHANICAL SYSTEMS. PERMITS SHALL COMPLY WITH SECTION MC 105 WITH ARTICLE 105 OF CHAPTER 1 OF TITLE 28 OF THE ADMINISTRATIVE CODE.

3. LISTED AND LABLED:

ALL APPLIANCES REGULATED BY NYCMC SHALL BE LISTED AND LABELED AS REQUIRED BY MC 301.4
LABEL INFORMATION SHALL COMPLY WITH REQUIREMENTS OF MC 301.6

4. VIBRATION ISOLATION:

ALL MECHANICAL EQUIPMENT SHALL BE MOUNTED AND SUPPORTED AS REQUIRED BY MC 301.10

5. FIRE STOPPING COMPLIANCE NOTE:

A. FOR FIRE STOPPING AT ANY FIRE RATED CONSTRUCTION PENETRATION CONTRACTOR SHALL REFER TO SPECIFICATION SECTION 07270

B. ALL DUCT AND PIPE PENETRATIONS OF RATED CONSTRUCTION SHALL COMPLY WITH NYC BC 712.

6. DUCT SYSTEMS:

DUCT SYSTEMS USED FOR THE MOVEMENT OF AIR IN HVAC SYSTEMS SHALL COMPLY WITH MC CHAPTER 6.
DUCT INSULATION SHALL CONFORM TO THE REQUIREMENTS OF MC 604.2 AND THE ENERGY CONSERVATION CODE OF NEW YORK CITY.

7. MATERIALS:

MATERIALS SHALL BE USED, TESTED, APPROVED FOR USE IN ACCODANCE THE SPECIFIC PROVISIONS OF TITLE 28 OF THE ADMINISTRATIVE CODE ARTICAL 113 "MATERIALS".

DUCT WORK

- SINGLE LINE DUCTWORK, NEW
- SINGLE LINE DUCTWORK, EXISTING
- DUCTWORK WITH ACCOUSTIC LINING
- FLEXIBLE CONNECTION
- VERTICAL DUCT DROP
- VERTICAL DUCT RISE
- DUCT UNDER PRESSURE (SUPPLY AIR OR FAN DISCHARGE)
- DUCT UNDER NEGATIVE PRESSURE (RETURN, EXHUAST OR OUTSIDE AIR)
- VANED ELBOW
- VANED ELBOW OR RADIUS ELBOW
- RADIUS ELBOW

PIPING SYMBOLS

- BALL VALVE
- GATE VALVE
- "Y" TYPE STRAINER W/BLOWOFF VALVE
- UNION
- AUTOMATIC CONTROL VALVE
- RELIEF VALVE
- POINT OF CONNECTION
- (T) THERMOSTAT

HVAC ABBREVIATIONS

AC	AIR CONDITIONING
ACS	AUTOMATIC CONTROL SYSTEM
ACU	AIR CONDITIONING UNIT
AD	ACCESS DOOR
AL	ALUMINUM
AP	ACCESS PANEL
CC	COOLING COIL
CD-A	CEILING DIFFUSER, (TYPE A)
CEWA	CRITICAL ENVIRONMENT WORK AUTHORIZATION
CFM	CUBIC FEET PER MINUTE
CG	CEILING GRILLE
CLG	CEILING
COND	CONDENSATE
CR	CEILING REGISTER
CO	CLEANOUT
CV	CONSTANT VOLUME
D	DROP
DB	DRY BULB
DMPR	DAMPER
DOM	DOMESTIC
DWG	DRAWING
EA	EXHAUST AIR
EAT	ENTERING AIR TEMPERATURE
EDB	ENTERING DRY BULB TEMPERATURE
ELEC	ELECTRIC
ELEV	ELEVATION
EQ	EQUAL
EWB	ENTERING WET BULB
EWT	ENTERING WATER TEMPERATURE
EXH	EXHAUST
°F	DEGREES FAHRENHEIT
F	FILTER
FA	FREE AREA
FC	FLEXIBLE CONNECTION
FD	FIRE DAMPER WITH ACCESS DOOR
FSD	FIRE SMOKE DAMPER WITH ACCESS DOOR
FLA	FULL LOAD AMPERES
FPI	FINS PER INCH
FOR	FUEL OIL RETURN
FOS	FUEL OIL SUPPLY
FO	FUEL OIL
FTR	FINNED TUBE RADIATION
FV	FACE VELOCITY
H	HEIGHT
HC	HEATING COIL
HP	HORSE POWER
HUM	HUMIDIFIER
HV	HEATING AND VENTILATING
ID	INSIDE DIAMETER
LAT	LEAVING AIR TEMPERATURE
LDB	LEAVING DRY BULB TEMPERATURE
LWB	LEAVING WET BULB TEMPERATURE
LWT	LEAVING WATER TEMPERATURE
MB	MIXING BOX
MD	MOTORIZED DAMPER
MER	MECHANICAL EQUIPMENT ROOM
MHP	MOTOR HORSEPOWER
NC	NORMALLY CLOSED
NK	NECK
NO	NORMALLY OPEN
OA	OUTSIDE AIR
OAI	OUTSIDE AIR INTAKE
OD	OUTSIDE DIAMETER
OPD	OVERCURRENT PROTECTION DEVICE
OV	OUTLET VELOCITY
PD	PRESSURE DROP
PF	PREFILTER
R	RISE
RA	RETURN AIR
RD	ROOF DRAIN
RAF	RETURN AIR FAN
RH	RELATIVE HUMIDITY
RHC	REHEAT COIL
RM	ROOM
RPM	REVOLUTIONS PER MINUTE
RR	RETURN REGISTER
S.A.	SUPPLY AIR
SA	SOUND ATTENUATION UNIT
SF	SQUARE FOOT
SF	SUPPLY FAN
SP	STATIC PRESSURE
SPEC	SPECIFICATION
SR	SUPPLY REGISTER
SS	STAINLESS STEEL
T	THROAT
TDH	TOTAL DYNAMIC HEAD
TEMP	TEMPERATURE
TG	TOP GRILLE
TR	TOP REGISTER
TRF	TRANSFER FAN
TRG	TRANSFER GRILLE
TRD	TRANSFER DUCT
TX	TOILET EXHAUST
UON	UNLESS OTHERWISE NOTED
UH	UNIT HEATER
WMS	WIRE MESH SCREEN
VIV	VARIABLE INLET VANES
WB	WET BULB
WC	WATER COLUMN
WG	WATER GAUGE
WMS	WIRE MESH SCREEN
WSA	WIRE SIZE AMPS


PIPING ABBREVIATIONS

AAV	AUTOMATIC AIR VENT
ATM	ATMOSPHERE
AFF	ABOVE FINISHED FLOOR
BD	BLOWDOWN
BFP	BACK FLOW PREVENTOR
BHP	BRAKE HORSEPOWER OR BOILER HORSEPOWER
BOD	BOTTOM OF DUCT ELEVATION
CF	CHEMICAL FEED
COV	WITH CHAIN OPERATOR VALVE
CW	COLD WATER / CITY WATER
DW	DOMESTIC WATER
DN	DOWN
DWG	DRAWING
EL	ELEVATION
ELEC	ELECTRIC
EXP	EXPANSION
F	FAHRENHEIT
FC	FLEXIBLE CONNECTION
FIN FL	FINISHED FLOOR
FT	FEET
GAL	GALLON
GPM	GALLONS PER MINUTE
GCWS	GYLCOL COLD WATER SUPPLY
GCWR	GLYCOL COLD WATER RETURN
GHWR	GLYCOL HOT WATER RETURN
GHWS	GLYCOL HOT WATER SUPPLY
HDR	HEADER
HWS	HOT WATER SUPPLY
HWR	HOT WATER RETURN
RHHWS	REHEAT HOT WATER SUPPLY
RHHWR	REHEAT HOT WATER RETURN
IN	INCH OR INCHES
LBS	POUNDS
MAX	MAXIMUM
MCC	MOTOR CONTROL CENTER
MIN	MINIMUM
MOV	MOTORIZED VALVE
MU	MAKE-UP WATER
MWP	MAXIMUM WORKING PRESSURE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
NO.	NUMBER
NTS	NOT TO SCALE
OD	OUTSIDE DIAMETER
PSIG	PSI GAUGE
RRV	REFRIGERANT RELIEF VENT
S.R.	SHORT RADIUS
SPEC	SPECIFICATION
SCWS	SECONDARY CONDENSER WATER SUPPLY
SCWR	SECONDARY CONDENSER WATER RETURN
TEMP	TEMPERATURE
TYP	TYPICAL
VFD	VARIABLE FREQUENCY DEVICE
VTR	VENT TO ROOF
W/	WITH
W/O	WITHOUT

MECHANICAL DRAWING NOTES:

A. GENERAL

1. CONTRACTOR WILL BE HELD RESPONSIBLE TO HAVE VISITED AND EXAMINED THE PREMISES PRIOR TO SUBMITTING HIS PROPOSAL IN ORDER TO UNDERSTAND THE EXISTING CONDITIONS RELATED TO HIS WORK.
2. WORK IN THIS BUILDING SHALL BE DONE WHEN AND AS DIRECTED AND SHALL BE PERFORMED SO AS TO CAUSE THE LEAST POSSIBLE INCONVENIENCE AND DISTURBANCE TO ITS OCCUPANTS. ALL WORK IS TO BE COMPLETED DURING NORMAL HOURS UNLESS OTHERWISE DIRECTED.
3. MATERIALS, DOCUMENTATION AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH BUILDING STANDARDS, LOCAL CODES AND AS SPECIFIED.
4. SUPPORT ALL DUCTWORK AND PIPING FROM BUILDING STRUCTURE AND/OR FRAMING IN AN APPROVED MANNER. WHERE OVERHEAD CONSTRUCTION DOES NOT PERMIT FASTENING OF SUPPORTS FOR EQUIPMENT, FURNISH ADDITIONAL FRAMING.
5. SEAL OPENINGS AROUND DUCTS AND PIPING THROUGH PARTITIONS, WALLS AND FLOORS WITH MINERAL WOOL OR OTHER NON-COMBUSTIBLE MATERIAL.
6. FIREPROOFING AND INSULATION DISTURBED BY NEW CONSTRUCTION SHALL BE RESTORED TO ORIGINAL CONDITION.
7. DO NOT INTERRUPT ANY SERVICES OF THE EXISTING BUILDING NOR INTERFERE WITH THE SERVICES IN ANY WAY WITHOUT WRITTEN PERMISSION. INTERRUPTIONS SHALL BE AS BRIEF AS POSSIBLE AND ONLY AT DESIGNATED TIMES.
8. UNDER NO CIRCUMSTANCES WILL THIS CONTRACTOR OR HIS WORKMEN BE PERMITTED TO USE ANY PART OF THE BUILDING AS A SHOP EXCEPT PARTS AS DESIGNATED FOR SUCH USE.
9. REMOVE RUBBISH FROM PREMISES AND SITE AT THE END OF EACH WORK DAY AND AS DIRECTED.
10. STORE MATERIALS IN DESIGNATED SPACES.
11. COORDINATE NEW WORK WITH OTHER TRADES AND EXISTING FIELD CONDITIONS.
12. MECHANICAL CONTRACTOR SHALL COORDINATE ALL TIE-INS, PLUS REMOVALS WITH GENERAL CONTRACTOR AND OWNER'S SCHEDULE.
13. THIS CONTRACTOR SHALL PAY FEES, GIVE NOTICE, FILE NECESSARY DRAWINGS AND OBTAIN PERMITS AND CERTIFICATES OF APPROVAL REQUIRED IN CONNECTION WITH WORK UNDER THIS CONTRACT. THE CONTRACTOR SHALL COMPLY WITH LOCAL LAWS, STATE LAWS, ORDINANCES, RULES AND REGULATIONS.
14. UNNECESSARY NOISE SHALL BE AVOIDED AT ALL TIMES AND NECESSARY NOISE SHALL BE REDUCED TO A MINIMUM.
15. NEW WORK AND EQUIPMENT SHALL BE THOROUGHLY CLEANED AND MADE READY FOR USE.
16. SEAL ALL LEAKS IN SUPPLY AND RETURN MAIN DUCTS WITHIN WORK AREA AS PER SMACNA.
17. ALL DEMOLITION WORK SHALL STRICTLY COMPLY WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES AND STANDARDS INCLUDING BUT NOT LIMITED TO OSHA, THE RHODE ISLAND BUILDING CODE, ETC.
18. ALL SUPPLY/RETURN AIR DUCTWORK SHALL HAVE INSULATION. MINIMUM R-5 INSULATION WHEN LOCATED IN UNOCCUPIED SPACES. REFER TO DRAWING M002 DUCTWORK INSULATION SPECIFICATION FOR THE REQUIRED THICKNESS.

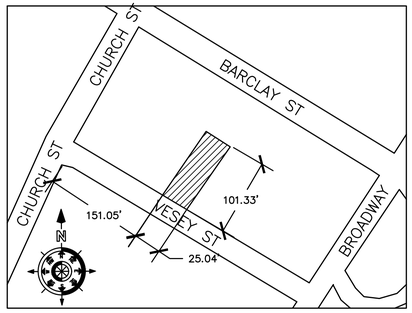

1 PLOT PLAN
N.T.S.

PROPERTY INFORMATION

18 VESEY STREET
NEW YORK, NY, 10007
BLOCK: 88
LOT: 4
BIN: 1001234
COMMUNITY BOARD: 101
ZONING: C5-3, LM (LOWER MANHATTAN)
ZONING MAP: 12B
LOT SIZE = 2,537 SQFT.

HEIGHT: 73 FT
STORIES: 5 STORIES
OCCUPANCY CLASSIFICATION: R-1
CONSTRUCTION CLASSIFICATION: 3
NON-FIREPROOF
MULTIPLE DWELLING CLASSIFICATION: HACB

CONSTRUCTION AREA
SQUARE FOOTAGE: 4175 SQFT

THIS BUILDING WILL BE VACANT DURING CONSTRUCTION

REVIEW REQUESTED UNDER 2022 MECHANICAL CODE

CERTIFICATE OF COMPLIANCE BY CONTRACTOR

CERTIFICATE OF COMPLIANCE SHALL BE OBTAINED BY CONTRACTOR IN ACCORDANCE WITH THE ADMINISTRATIVE CODE.

M.E.A. AND B.S. & A. NUMBERS FOR EQUIPMENT SHALL BE SUBMITTED AS REQUIRED BY THE BUILDING CODE.

CERTIFICATE OF COMPLIANCE SHALL BE REQUIRED FOR THE USE AND OPERATION OF THE FOLLOWING TYPES OF SERVICE EQUIPMENT:

(a) AIR CONDITIONING UNIT.

SERVICE EQUIPMENT PERMIT:

AS PER BC §28-105.2, SERVICE EQUIPMENT PERMITS ARE REQUIRED FOR THE INSTALLATION OR ALTERNATION OF SERVICE EQUIPMENT, INCLUDING BUT NOT LIMITED TO AIR CONDITIONING AND VENTILATION SYSTEMS.

THE FOLLOWING IS A LIST OF ALL REQUIRED PROGRESS & FINAL SPECIAL INSPECTIONS TR1 & PROGRESS INSPECTION TR8:

(TR-1) SPECIAL INSPECTIONS:

1. FIRE-RESISTANT PENETRATIONS AND JOINTS	BC 1705.17
2. HEATING SYSTEMS	BC 1705.31

(TR-8) ENERGY CODE PROGRESS INSPECTIONS:

1. HVAC-R AND SERVICE WATER HEATING EQUIPMENT	(IB3), (IIB3)
2. HVAC-R AND SERVICE WATER HEATING CONTROLS	(IB4), (IIB4)
3. HVAC-R AND SERVICE WATER PIPING DESIGN AND INSULATION	(IB5), (IIB5)
4. MAINTENANCE INFORMATION	(ID1), (IID1)

HVAC BUILDING DEPARTMENT NOTES:

A. THIS SYSTEM IS REQUIRED

B. A CONTROLLED INSPECTION AND TEST WILL BE CONDUCTED UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER OR ARCHITECT OR OTHER PERSON HAVING NOT LESS THAN (5) YEARS EXPERIENCE SUPERVISING THE INSTALLATION OF VENTILATING SYSTEMS. THE TEST WILL SHOW COMPLIANCE WITH THE BUILDING ADMINISTRATIVE CODE AND REFERENCE STANDARDS.

C. THE LICENSED PROFESSIONAL ENGINEER OR ARCHITECT OR OTHER PERSON NOT HAVING LESS THAN (5) YEARS EXPERIENCE SUPERVISING THE INSTALLATION OF VENTILATING SYSTEMS AND CONDUCTING SUCH TESTS WILL FILE A CERTIFICATE AND REPORT OF TEST THAT THE SYSTEM COMPLIES WITH THE APPLICABLE LAWS.

D. A STATEMENT WILL BE FILED BY THE OWNER (OR TENANT) IN POSSESSION THAT THE VENTILATING SYSTEM WILL BE KEPT IN CONTINUOUS OPERATION DURING NORMAL OCCUPANCY OF THE PREMISES.

E. ALL FIRE DAMPERS ARE TO BE OF TYPE APPROVED BY THE BOARD OF FIRE UNDERWRITERS. WHERE ENTERING OR LEAVING SHAFTS, FIRE DAMPERS ARE TO BE EQUIVALENT TO WALL RATING.

F. THE LATEST RULES OF BUILDING CODES ARE TO BE COMPLIED WITH.

G. SMOKE AND FIRE DETECTION SYSTEMS TO BE INSTALLED IN ACCORDANCE WITH THE BUILDING ADMINISTRATIVE CODE AND REFERENCE STANDARDS.

DoB APPLICATIONS

BOILER: DOBNOW#M01244603-S5

DoB RELATED APPLICATIONS

ALT-CO GENERAL CONSTRUCTION DOBNOW#M01244603-I1
MECHANICAL DOBNOW#M01244603-S1
PLUMBING DOBNOW#M01244603-S2
SPRINKLER DOBNOW#M01244603-S3
FUEL STORAGE DOBNOW#M01244603-S4


SCOPE OF WORK:

-INSTALL NEW BOILER FOR BUILDING HEATING SYSTEM.

ACF
ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
	01/08/26	BID SET

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:

MECHANICAL NOTES, SYMBOLS

DATE:	01/06/2026
PROJECT No.:	25086
CHECKED BY:	[illegible]
DRAWN BY:	PY/LZ/BL

SEAL AND SIGNATURE

DWG. No.:
BE-001.00

Sheets: 01 of 08

N.Y.C D.O.B No. :
M01244603-S5


NOTES:

1. FOR BOILER WORK ONLY
2. ALL INTAKE OPENING LOCATION SHALL COMPLY WITH 2022 MECHANICAL CODE
3. ALL EXHAUST OUTLET LOCATION SHALL COMPLY WITH 2022 MECHANICAL CODE
4. ALL INTERIOR AND EXTERIOR MECHANICAL EQUIPMENT AND SYSTEMS SHALL COMPLY WITH 2022 MECHANICAL CODE
5. BOILER MANUFACTURER SHALL PROVIDE CONTROL PANELS.
6. BOILER MANUFACTURER SHALL PROVIDE VENTLESS GAS TRAY.
7. BOILER MANUFACTURER SHALL PROVIDE CONDENSATE NEUTRALIZATION KIT.
8. MAINTAIN MINIMUM WATER FLOW TO THE BOILER AS PER MANUFACTURER RECOMMENDATION PER BOILER CODE.
9. HOT WATER BOILERS THAT SUPPLY HEAT TO THE BUILDING THROUGH ONE OR TWO PIPE HEATING SYSTEMS SHALL HAVE AN OUTDOOR SETBACK CONTROL THAT LOWERS THE BOILER WATER TEMPERATURE BASED ON THE OUTDOOR TEMPERATURE IN ACCORDANCE WITH THE NYCECC C403.4.1.5.
10. THE BOILER SHALL BE INSTALLED AS PER MANUFACTURER RECOMMENDATIONS AND BOILER CODE, INCLUDING ALL PROPOSED PIPING, AND THE PROPER BREECHING MATERIAL BEING INSTALLED.
11. BOILER ROOM AS WELL AS FLOOR IN BOILER ROOM IS TO BE A NONCOMBUSTIBLE 2 HOUR FIRE RATED ASSEMBLY


WATER PIPE SIZING CHART

	SIZE
UP TO 3	3/4"
3 TO 6	1"
6 TO 12	1 1/4"
12 TO 18	1 1/2"
18 TO 35	2"
35 TO 56 GPM	2 1/2"
56 TO 100	3"
100 TO 207	4"
207 TO 613	6"

NOTE:
FOR SIZES NOT INDICATED ON PIPING REFER TO THIS CHART FOR PIPE SIZES

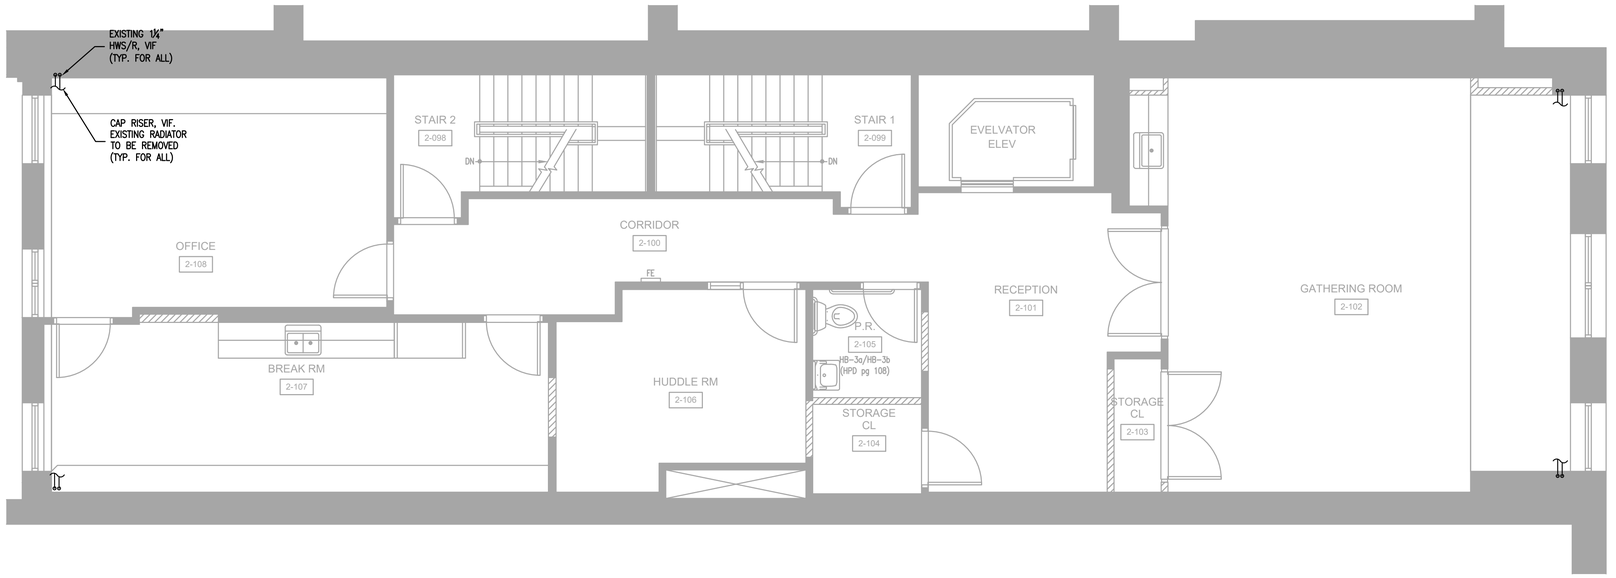

SECOND FLOOR PLAN
SCALE: 1/4"=1'-0"

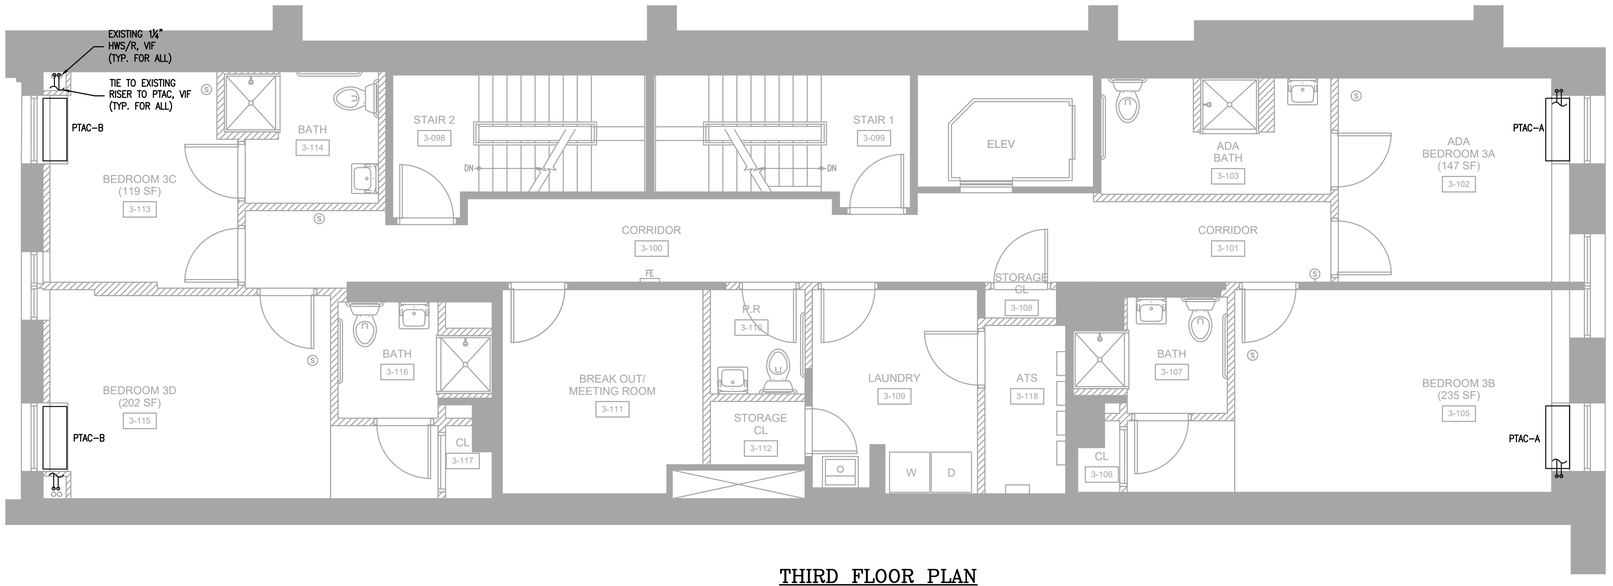

THIRD FLOOR PLAN
SCALE: 1/4"=1'-0"

WATER PIPE SIZING CHART


	SIZE
UP TO 3	3/4"
3 TO 6	1"
6 TO 12	1 1/4"
12 TO 18	1 1/2"
18 TO 35	2"
35 TO 56 GPM	2 1/2"
56 TO 100	3"
100 TO 207	4"
207 TO 613	6"

NOTE:
FOR SIZES NOT INDICATED ON PIPING REFER TO THIS CHART FOR PIPE SIZES

ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
	01/08/26	BID SET

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:

MECHANICAL SECOND AND THIRD FLOOR PLANS

DATE:	01/06/2026
PROJECT No.:	25086
CHECKED BY:	XX
DRAWN BY:	PY/LZ/BL

SEAL AND SIGNATURE

DWG. No.:
BE-101.00

Sheets: 02 of 08

N.Y.C D.O.B No. :
M01244603-S5


NOTES:

1. FOR BOILER WORK ONLY
2. ALL INTAKE OPENING LOCATION SHALL COMPLY WITH 2022 MECHANICAL CODE
3. ALL EXHAUST OUTLET LOCATION SHALL COMPLY WITH 2022 MECHANICAL CODE
4. ALL INTERIOR AND EXTERIOR MECHANICAL EQUIPMENT AND SYSTEMS SHALL COMPLY WITH 2022 MECHANICAL CODE
5. BOILER MANUFACTURER SHALL PROVIDE CONTROL PANELS.
6. BOILER MANUFACTURER SHALL PROVIDE VENTLESS GAS TRAY.
7. BOILER MANUFACTURER SHALL PROVIDE CONDENSATE NEUTRALIZATION KIT.
8. MAINTAIN MINIMUM WATER FLOW TO THE BOILER AS PER MANUFACTURER RECOMMENDATION PER BOILER CODE.
9. HOT WATER BOILERS THAT SUPPLY HEAT TO THE BUILDING THROUGH ONE OR TWO PIPE HEATING SYSTEMS SHALL HAVE AN OUTDOOR SETBACK CONTROL THAT LOWERS THE BOILER WATER TEMPERATURE BASED ON THE OUTDOOR TEMPERATURE IN ACCORDANCE WITH THE NYCECC C403.4.1.5.
10. THE BOILER SHALL BE INSTALLED AS PER MANUFACTURER RECOMMENDATIONS AND BOILER CODE, INCLUDING ALL PROPOSED PIPING, AND THE PROPER BREECHING MATERIAL BEING INSTALLED.
11. BOILER ROOM AS WELL AS FLOOR IN BOILER ROOM IS TO BE A NONCOMBUSTIBLE 2 HOUR FIRE RATED ASSEMBLY

WATER PIPE SIZING CHART

	SIZE
UP TO 3	3/4"
3 TO 6	1"
6 TO 12	1 1/4"
12 TO 18	1 1/2"
18 TO 35	2"
35 TO 56	GPM 2 1/2"
56 TO 100	3"
100 TO 207	4"
207 TO 613	6"

NOTE:
FOR SIZES NOT INDICATED ON PIPING REFER TO THIS CHART FOR PIPE SIZES

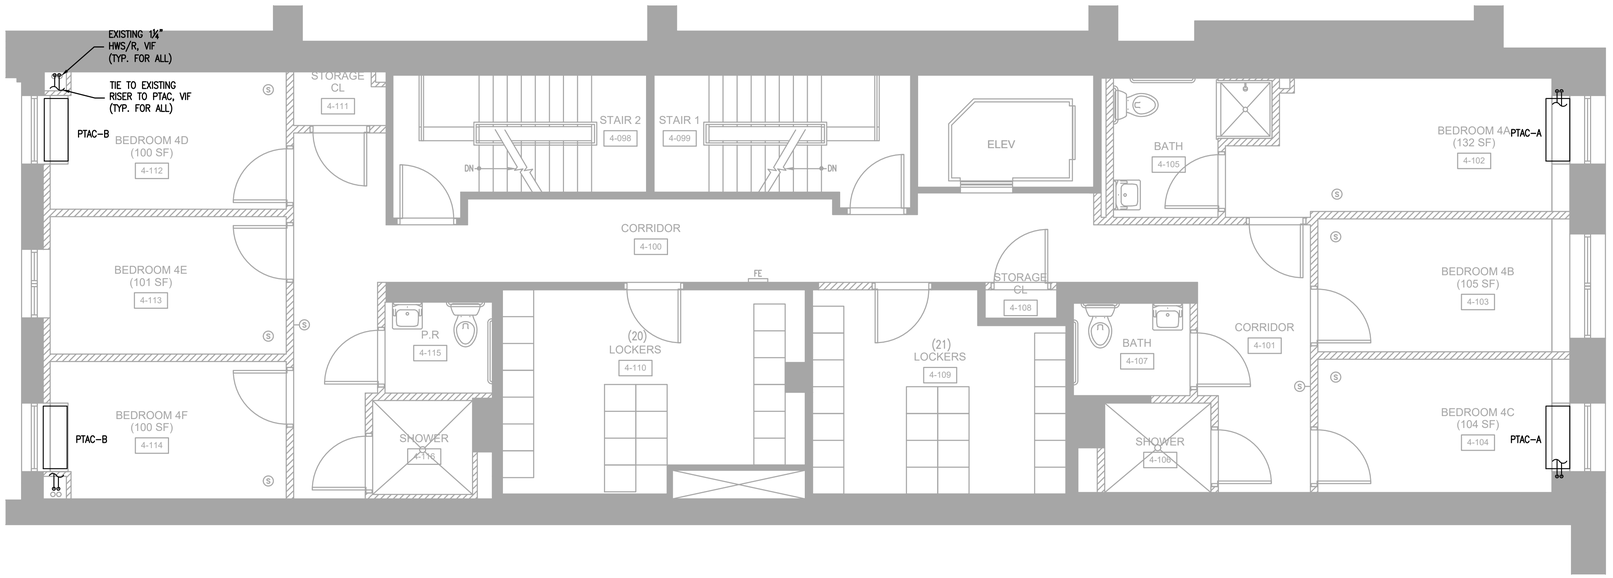


FOURTH FLOOR PLAN
SCALE: 1/4"=1'-0"

WATER PIPE SIZING CHART

	SIZE
UP TO 3	3/4"
3 TO 6	1"
6 TO 12	1 1/4"
12 TO 18	1 1/2"
18 TO 35	2"
35 TO 56	GPM 2 1/2"
56 TO 100	3"
100 TO 207	4"
207 TO 613	6"

NOTE:
FOR SIZES NOT INDICATED ON PIPING REFER TO THIS CHART FOR PIPE SIZES

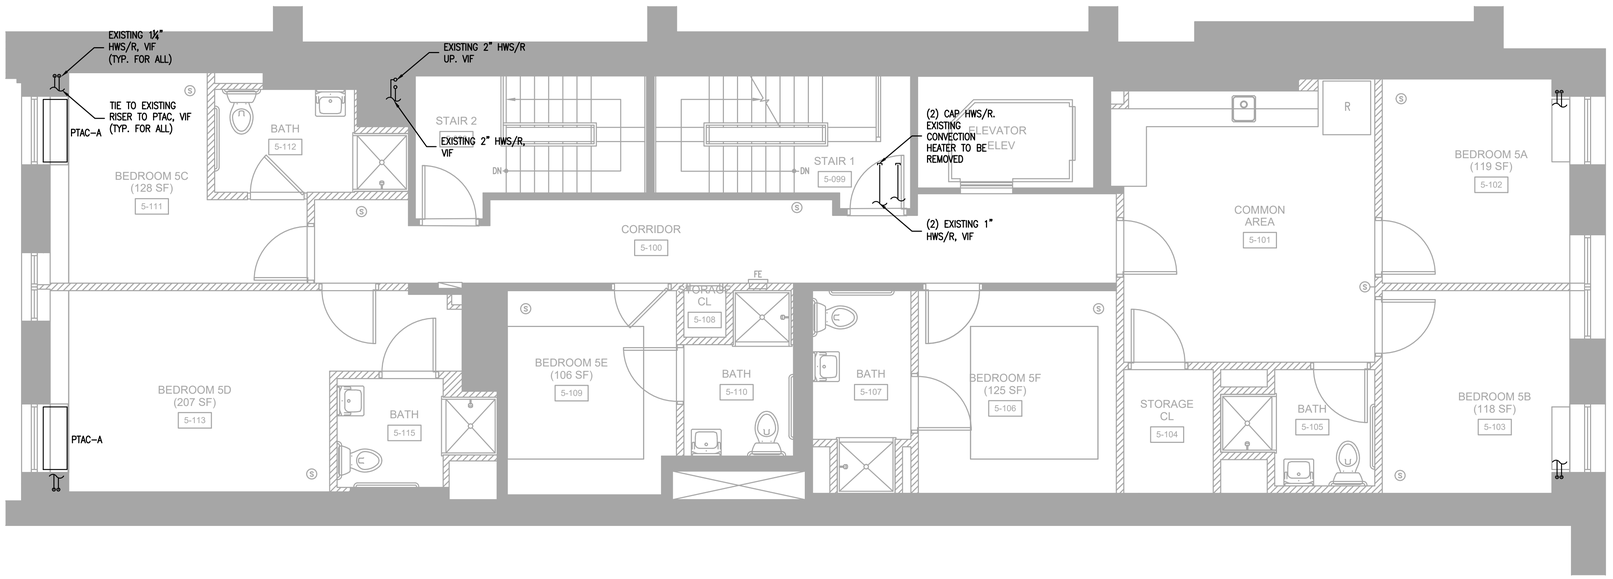


FIFTH FLOOR PLAN
SCALE: 1/4"=1'-0"

ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
	01/08/26	BID SET

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:
MECHANICAL FOURTH AND FIFTH FLOOR PLANS

DATE: 01/06/2026
PROJECT No.: 25086
CHECKED BY:
DRAWN BY: PY/LZ/BL
SEAL AND SIGNATURE


DWG. No.:
BE-102.00

Sheets: 03 of 08

N.Y.C D.O.B No. :
M01244603-S5

NOTES:

1. FOR BOILER WORK ONLY
2. ALL INTAKE OPENING LOCATION SHALL COMPLY WITH 2022 MECHANICAL CODE
3. ALL EXHAUST OUTLET LOCATION SHALL COMPLY WITH 2022 MECHANICAL CODE
4. ALL INTERIOR AND EXTERIOR MECHANICAL EQUIPMENT AND SYSTEMS SHALL COMPLY WITH 2022 MECHANICAL CODE
5. BOILER MANUFACTURER SHALL PROVIDE CONTROL PANELS.
6. BOILER MANUFACTURER SHALL PROVIDE VENTLESS GAS TRAY.
7. BOILER MANUFACTURER SHALL PROVIDE CONDENSATE NEUTRALIZATION KIT.
8. MAINTAIN MINIMUM WATER FLOW TO THE BOILER AS PER MANUFACTURER RECOMMENDATION PER BOILER CODE.
9. HOT WATER BOILERS THAT SUPPLY HEAT TO THE BUILDING THROUGH ONE OR TWO PIPE HEATING SYSTEMS SHALL HAVE AN OUTDOOR SETBACK CONTROL THAT LOWERS THE BOILER WATER TEMPERATURE BASED ON THE OUTDOOR TEMPERATURE IN ACCORDANCE WITH THE NYCECC C403.4.1.5.
10. THE BOILER SHALL BE INSTALLED AS PER MANUFACTURER RECOMMENDATIONS AND BOILER CODE, INCLUDING ALL PROPOSED PIPING, AND THE PROPER BREECHING MATERIAL BEING INSTALLED.
11. BOILER ROOM AS WELL AS FLOOR IN BOILER ROOM IS TO BE A NONCOMBUSTIBLE 2 HOUR FIRE RATED ASSEMBLY

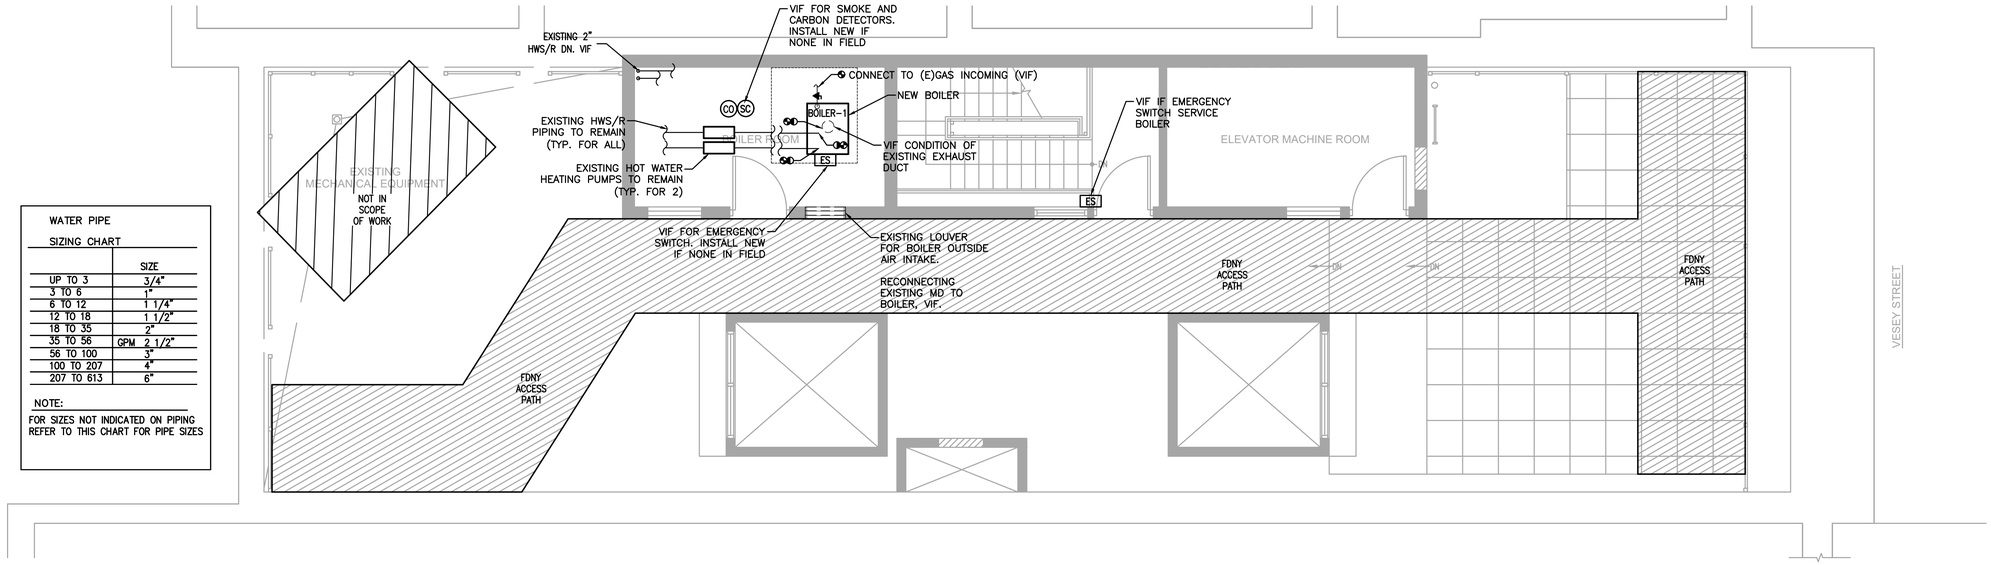

WATER PIPE SIZING CHART

	SIZE
UP TO 3	3/4"
3 TO 6	1"
6 TO 12	1 1/4"
12 TO 18	1 1/2"
18 TO 35	2"
35 TO 56 GPM	2 1/2"
56 TO 100	3"
100 TO 207	4"
207 TO 613	6"


NOTE:
FOR SIZES NOT INDICATED ON PIPING REFER TO THIS CHART FOR PIPE SIZES

ROOF PLAN
SCALE: 1/4"=1'-0"

ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
	01/08/26	BID SET

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:
MECHANICAL ROOF PLAN

DATE:	01/06/2026
PROJECT No.:	25086
CHECKED BY:	
DRAWN BY:	PY/LZ/BL

SEAL AND SIGNATURE

DWG. No.:
BE-103.00

Sheets: 04 of 08


N.Y.C D.O.B No. :
M01244603-S5

BOILER & BURNER SCHEDULE

UNIT NO			BOILER-1
APPROX. OPERATING WEIGHT (INCLUDING BURNER)		lbs	735
SETTING ON RELIEF VALVES		psig	30
RATING	BOILER OUTPUT AT FULL FIRE (130°F RETURN WATER TEMPERATURE)	MBH	237
	GAS INPUT (1000 Btu/cu.ft)	CFH	282
	THERMAL EFFICIENCY AT 120/100° @ 100% INPUT	%	84%
EWT/LWT (°F)			130°/200°
MANUFACTURER			WEIL-MCLAIN
MODEL NO			EG-75
BURNER TURNDOWN			
MAWP			160 PSI
REQ'D GAS INLET PRESSURE (MIN./MAX)		in. w.g.	4"/13"
ELECTRICAL DATA			
	VOLTAGE PER MODULE		120
	PHASE PER MODULE		1
	HERTZ PER MODULE		60
	AMPS (FLA)		<5

NOTES:


1. BOILER MANUFACTURER SHALL PROVIDE CONTROL PANELS.
2. BOILER MANUFACTURER SHALL PROVIDE VENTLESS GAS TRAIN.
3. BOILER MANUFACTURER SHALL PROVIDE CONDENSATE NEUTRALIZATION KIT
4. MAINTAIN MINIMUM WATER FLOW TO THE BOILER AS PER MANUFACTURER RECOMMENDATION.
5. BOILER IS CSA LISTED AND LOW PRESSURE
6. BOILER IS WATER-TUBE AND CAST IRON
7. BOILER TO CONNECT TO VENT, GALVANIZED STEEL
8. BOILER TO SERVE 2ND TO 5TH FLOOR

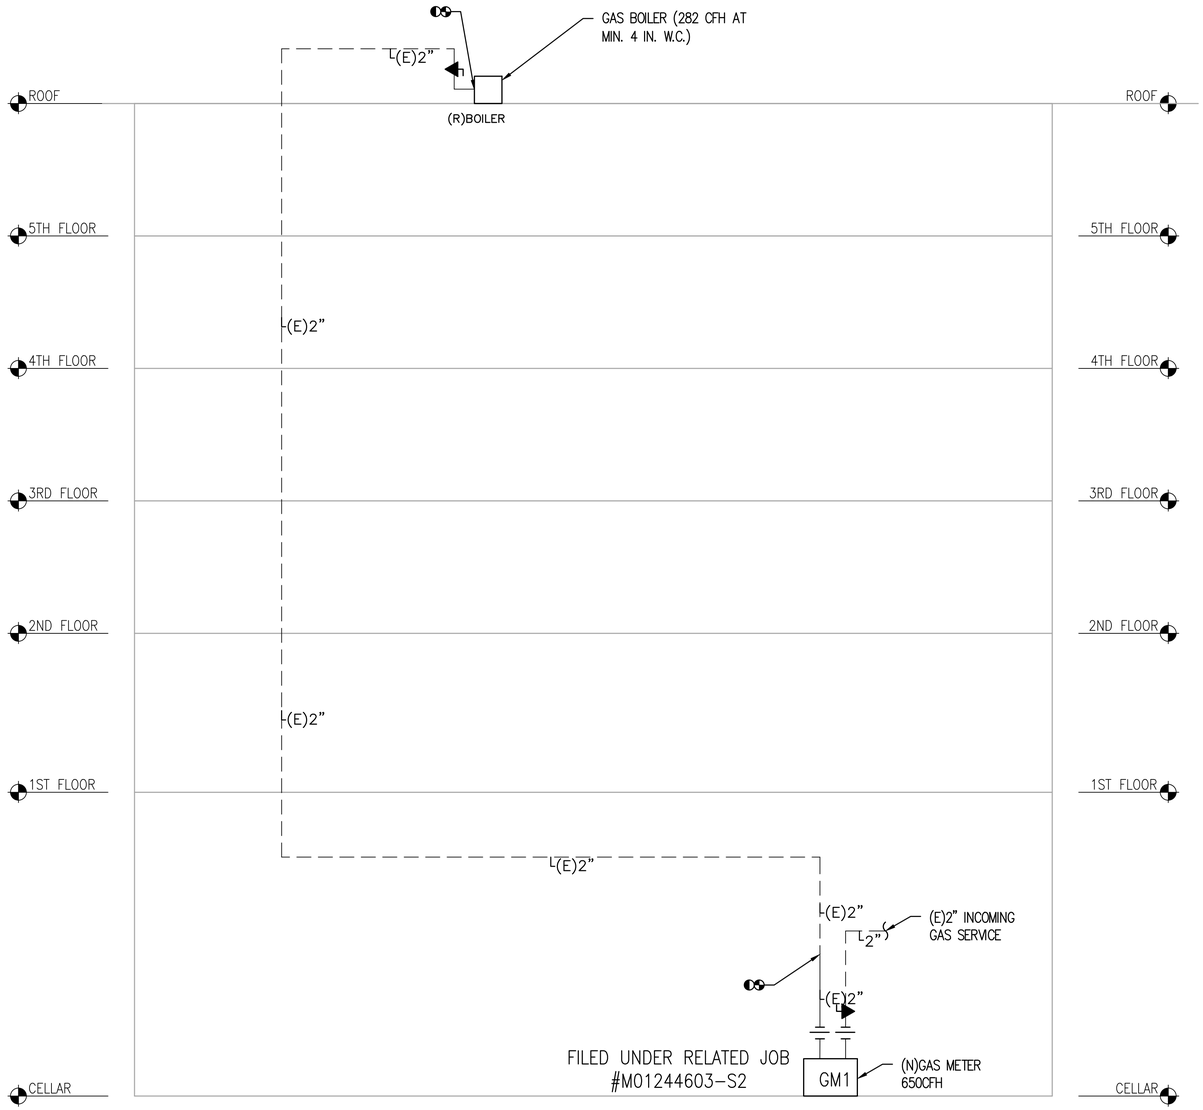

ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
	01/08/26	BID SET

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:

MECHANICAL SCHEDULE AND GAS RISER DIAGRAM


DATE:	01/06/2026
PROJECT No.:	25086
CHECKED BY:	
DRAWN BY:	PY/LZ/BL

SEAL AND SIGNATURE

DWG. No.:
BE-401.00


Sheets: 05 of 08

N.Y.C D.O.B No. :
M01244603-S5

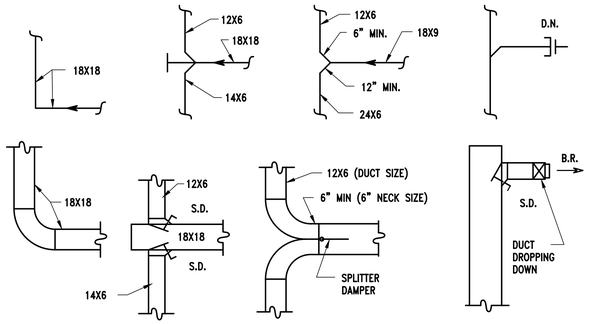


TYPICAL SINGLE LINE DUCT DETAILS

NOT TO SCALE

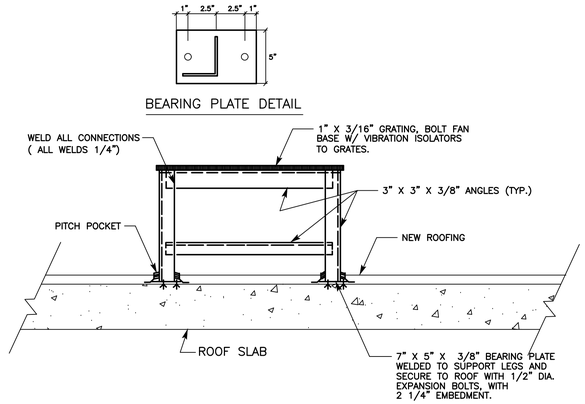


AC UNIT SUPPORT STAND DETAIL

NO SCALE

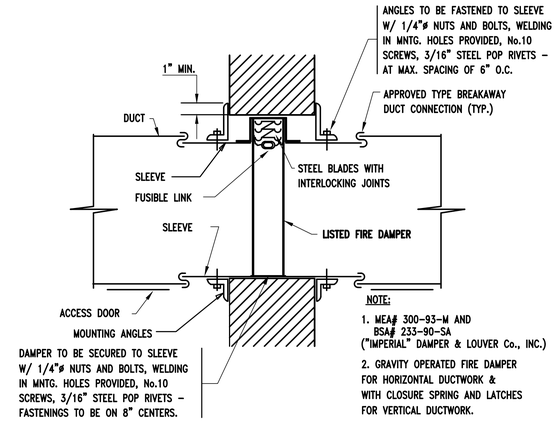

SHUTTER FIRE DAMPER

NOT TO SCALE

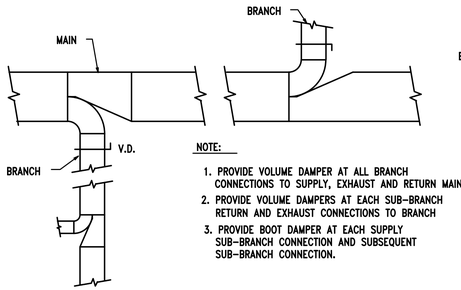


NOTE:

1. PROVIDE VOLUME DAMPER AT ALL BRANCH CONNECTIONS TO SUPPLY, EXHAUST AND RETURN MAINS.
2. PROVIDE VOLUME DAMPERS AT EACH SUB-BRANCH RETURN AND EXHAUST CONNECTIONS TO BRANCH
3. PROVIDE BOOT DAMPER AT EACH SUPPLY SUB-BRANCH CONNECTION AND SUBSEQUENT SUB-BRANCH CONNECTION.


DUCT CONNECTIONS: BRANCH + SUB-BRANCH

NOT TO SCALE

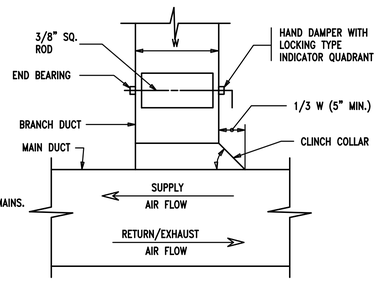


RECTANGULAR DUCT TAP WITH VOLUME DAMPER

NOT TO SCALE:

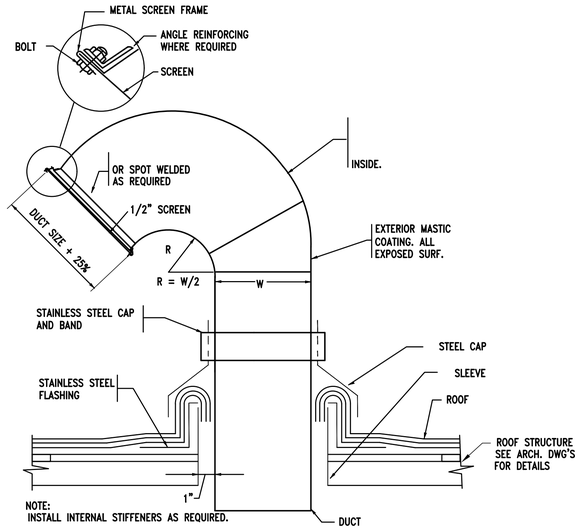


GOOSENECK DETAIL

NOT TO SCALE

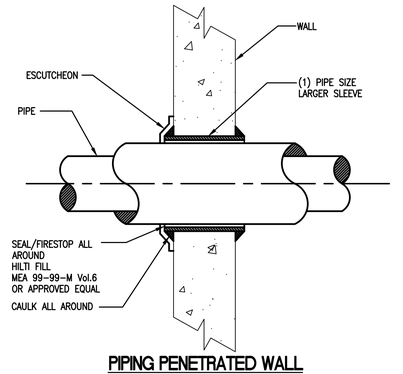

PIPING PENETRATED WALL

NOT TO SCALE

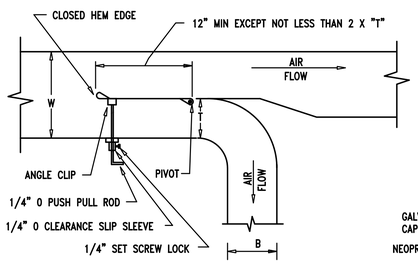


NOTES:

1. FURNISH THIS TYPE CONNECTION WHERE NOTED AND WHEN SINGLE LINE DUCTWORK IS INDICATED AS THIS FOR LOW PRESSURE BRANCHES WITH MORE THAN 700 CFM AND MEDIUM PRESSURE BRANCHES WITH MORE THAN 1000 CFM
2. ONE ROD UP TO 24" DEPTH
3. TWO RODS 25" UP TO 36"
4. OVER 36" USE DUCT BRANCH WITH THROAT AND VOLUME DAMPER
5. $T = \frac{CFM \quad B \times W}{CFM \quad W}$, MINIMUM 4 INCHES

RECTANGULAR DUCT BRANCH WITH THROAT + SPLITTER DAMPER


NOT TO SCALE

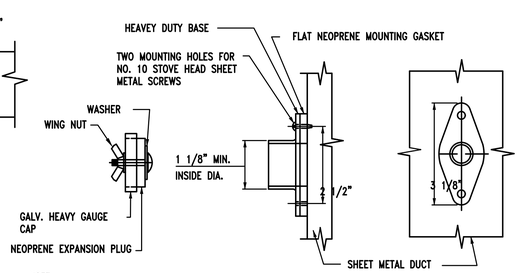

NOTE:
INSTALL ONE TEST HOLE FITTING ON BOTH (OPPOSITE) SIDES OF DISCHARGE DUCT FROM ALL SUPPLY UNITS AND EXHAUST UNITS AND OTHER LOCATIONS SHOWN ON PLANS.


DETAIL OF TEST FITING FOR AIR READINGS

NOT TO SCALE

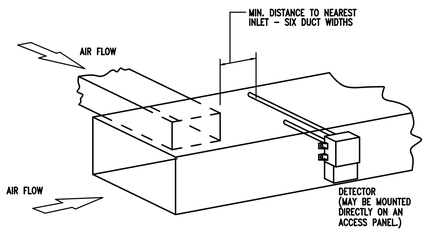

DUCT MOUNTED SMOKE DETECTOR INSTALLATION DETAIL

NOT TO SCALE

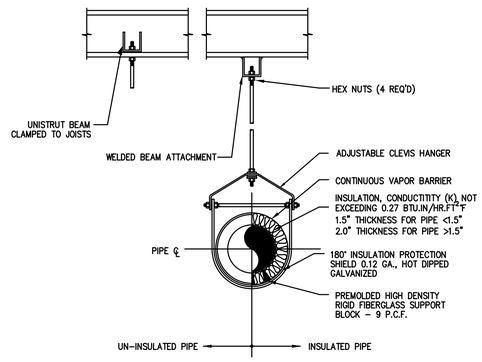


CLEVIS HANGER

ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
	01/08/26	BID SET

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:

MECHANICAL DETAILS


DATE:	01/06/2026
PROJECT No.:	25086
CHECKED BY:	XX
DRAWN BY:	PY/LZ/BL

SEAL AND SIGNATURE

DWG. No.:
BE-500.00

Sheets: 06 of 08


N.Y.C D.O.B No. :
M01244603-S5

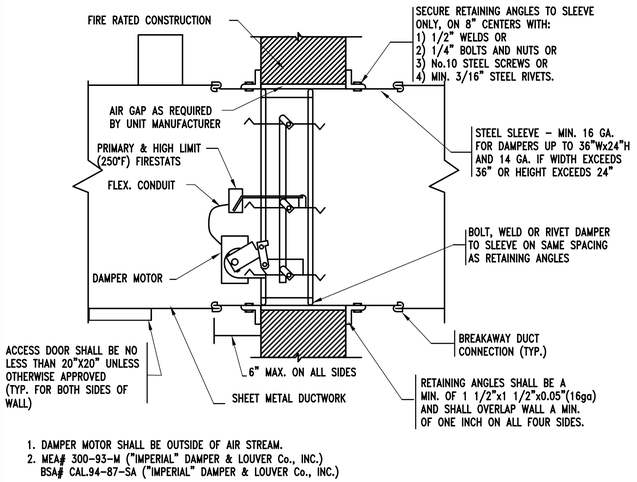

1. DAMPER MOTOR SHALL BE OUTSIDE OF AIR STREAM.
2. MEA# 300-93-M ("IMPERIAL" DAMPER & LOUVER Co., INC.)
   BSA# CAL.94-87-SA ("IMPERIAL" DAMPER & LOUVER Co., INC.)


COMBINATION FIRE AND SMOKE DAMPER

NOT TO SCALE

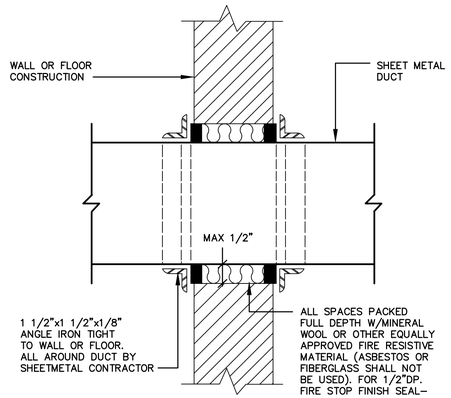


NOTE:
1. FOR WALLS REQUIRING FIRE DAMPERS, SEE OTHER DETAILS.


DETAIL OF CAULKING OF DUCT PIERCING WALLS OR FLOORS WHERE FIRE DAMPERS ARE NOT REQUIRED

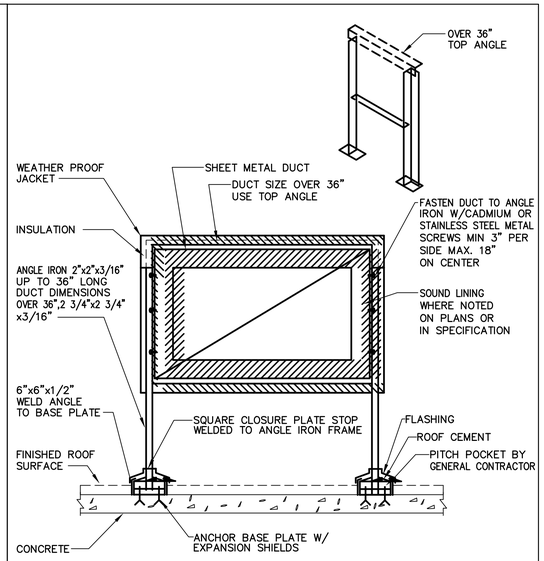


DETAIL OF SUPPORT AND INSULATION FOR ROOF MOUNTED DUCTWORK



BARE PIPE



INSULATED HOT PIPE



INSULATED COLD PIPING AND INSULATED HOT PIPING (ABOVE 160 F) °

Ⓐ ALL SPACES PACKED FULL DEPTH WITH MINERAL WOOL OR OTHER EQUALLY APPROVED FIRE RESISTIVE MATERIAL (ASBESTOS OR FIBERGLASS SHALL NOT BE USED)

FIRE RESISTANT FOAM SEAL ANT CHASE FOAM CTC P2-855 (NYC MEA#58-79 M#1&11 MAY BE USED. INSTALL-ATION AS PER MANUFAC-TURER.

Ⓑ ESCUTCHEON BOTH SIDES

Ⓒ SLEEVE

Ⓓ DIAMETER OF INSULATED PIPE

Ⓔ ANHYDROUS CALCIUM SILICATE INSULATION THRU SLEEVE


Ⓕ FIRE RATED PARTITION WALL OR FLOOR

Ⓖ FIBERGLASS INSULATION

Ⓗ TERMINATE INSULATION AT ESCUTCHEON

Ⓘ 1/2" DEPTH FIRE STOP FINISH SEALANT (SEE HVAC SPEC)

DETAIL OF PIPING PIERCING FIRE RATED PARTITIONS, WALLS AND FLOORS

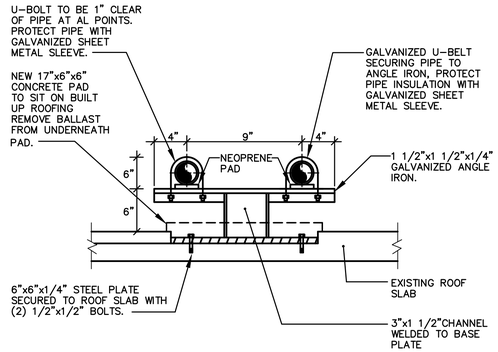


PIPES SUPPORT ON ROOF DETAIL

ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
	01/08/26	BID SET

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:

MECHANICAL DETAILS

DATE:	01/06/2026
PROJECT No.:	25086
CHECKED BY:	
DRAWN BY:	PY/LZ/BL

SEAL AND SIGNATURE

DWG. No.:
BE-501.00

Sheets: 07 of 08

N.Y.C D.O.B No. :
M01244603-S5

SPECIFICATIONS

1. GENERAL

A. THE "GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION," AIA DOCUMENT A201, LATEST EDITION, AND THESE SPECIFICATIONS AS APPLICABLE ARE PART OF THIS CONTRACT.

B. ALL APPLICABLE CODES, LAWS AND REGULATIONS GOVERNING OR RELATING TO ANY PORTION OF THIS WORK ARE HEREBY INCORPORATED INTO AND MADE A PART OF THESE SPECIFICATIONS, AND THEIR PROVISIONS SHALL BE CARRIED OUT BY THE CONTRACTOR WHO SHALL INFORM THE OWNER, PRIOR TO SUBMITTING A PROPOSAL, OF ANY WORK OR MATERIALS WHICH VIOLATE ANY OF THE ABOVE LAWS AND REGULATIONS. ANY WORK DONE BY THE CONTRACTOR CAUSING SUCH VIOLATION SHALL BE CORRECTED BY THE CONTRACTOR.

C. DUCTWORK AND PIPING IS SHOWN DIAGRAMMATICALLY AND DOES NOT SHOW ALL OFFSETS, DROPS AND RISES OF RUNS. THE CONTRACTOR SHALL ALLOW IN HIS PRICE FOR ROUTING OF DUCTWORK AND PIPING TO AVOID OBSTRUCTIONS. EXACT LOCATIONS ARE SUBJECT TO APPROVAL OF ENGINEER. COORDINATION WITH THE EXISTING SERVICES, INCLUDING THOSE OF OTHER TRADES IS REQUIRED.

D. SUPPORT ALL DUCTWORK AND PIPING FROM BUILDING STRUCTURE AND/OR FRAMING IN AN APPROVED MANNER. WHERE OVERHEAD CONSTRUCTION DOES NOT PERMIT FASTENING OR SUPPORTS FOR EQUIPMENT, FURNISH ADDITIONAL FRAMING. INSERTS SHALL BE STEEL, SLOTTED TYPE AND FACTORY PAINTED. SINGLE ROD SHALL BE SIMILAR TO GRINNELL FIG. 281. MULTI-ROD SHALL BE SIMILAR TO FEE & MASON SERIES 9000 WITH END CAPS AND CLOSURE STRIPS. MAXIMUM LOADING INCLUDING PIPES, DUCTWORK CONTENTS AND COVERING SHALL NOT EXCEED 75% RATED INSERT CAPABILITY. WHEN SUPPORTING FROM BUILDING USE BEAM CLAMPS IN APPROVED MANNER.

E. INSTALL WORK SO AS TO BE READILY ACCESSIBLE FOR OPERATION,

MAINTENANCE AND REPAIR. MINOR DEVIATIONS FROM DRAWINGS MAY BE MADE TO ACCOMPLISH THIS, BUT CHANGES WHICH INVOLVE EXTRA COST SHALL NOT BE MADE WITHOUT APPROVAL.

F. THE CONTRACTOR SHALL KEEP ALL EQUIPMENT AND MATERIALS, AND ALL PARTS OF THE BUILDING, EXTERIOR SPACES AND ADJACENT STREETS, SIDEWALKS AND PAVEMENTS, FREE FROM MATERIAL AND DEBRIS RESULTING FROM THE EXECUTION OF THIS WORK. EXCESS MATERIALS WILL NOT BE PERMITTED TO ACCUMULATE EITHER ON THE INTERIOR OR THE EXTERIOR.

G. SEAL OPENINGS AROUND DUCTS AND PIPING THROUGH PARTITIONS, WALLS AND FLOORS (NOT IN SHAFTS) WITH MINERAL WOOL OR OTHER NONCOMBUSTIBLE MATERIAL.

H. PROVIDE ALL NECESSARY FLASHING AND COUNTERFLASHING TO MAINTAIN THE WATERPROOFING INTEGRITY OF THIS BUILDING AS REQUIRED BY THE INSTALLATION OR REMOVAL OF PIPES, DUCTS, LOUVERS, CONDUIT AND EQUIPMENT. PROVIDE EQUIPMENT CURBS AND DUNNAGE STEEL AS REQUIRED.

I. ALL PRESENT MATERIAL, EQUIPMENT AND CONSTRUCTION DEBRIS TO BE REMOVED UNDER THIS CONTRACT SHALL BECOME THE PROPERTY OF THE CONTRACTOR WITH THE EXCEPTION OF SPECIFIC EQUIPMENT AND APPARATUS REQUESTED BY THE BUILDING REPRESENTATIVE, ARCHITECT OR AS NOTED TO BE RELOCATED ON THE DRAWINGS SHALL BE PROPERLY DISPOSED OF BY THIS CONTRACTOR.

J. MATERIALS AND WORKMANSHIP, UNLESS OTHERWISE NOTED, SHALL BE IN ACCORDANCE WITH BUILDING STANDARDS.

K. REMOVABLE ACCESS TILE AND/OR ACCESS DOOR ARE REQUIRED IN HUNG CEILINGS, SHAFTS AND WALLS FOR ALL VOLUME AND FIRE DAMPERS, AUTOMATIC DAMPERS AND ALL OTHER MECHANICAL EQUIPMENT AND DEVICES. HVAC CONTRACTOR TO FURNISH ACCESS LOCATION REQUIREMENTS TO GENERAL CONTRACTOR. ACCESS TILE IDENTIFICATION: PROVIDE BUTTONS, TABS, AND MARKERS TO IDENTIFY LOCATION OF CONCEALED VALVES, DAMPERS AND EQUIPMENT.

L. ALL EQUIPMENT SHALL HAVE AN MEA AND/OR BSA NUMBER. THIS INFORMATION MUST BE INCLUDED IN THE SUBMITTAL PACKAGE.

M. ALL MATERIAL AND EQUIPMENT TO BE NEW UNLESS OTHERWISE NOTED AND SHALL BE IN ACCORDANCE WITH BUILDING STANDARDS.

N. SPECIFICATIONS ARE OF SIMPLIFIED FORM AND INCLUDE INCOMPLETE SENTENCES. WORDS OR PHRASES SUCH AS "THE CONTRACTOR SHALL," "SHALL BE," "FURNISH," "PROVIDE," "A," "THE," AND "ALL" HAVE BEEN OMITTED FOR BREVITY.

O. DEFINITIONS:

1) "PROVIDE": TO SUPPLY, INSTALL AND CONNECT UP COMPLETE AND READY FOR SAFE AND REGULAR OPERATION THE PARTICULAR WORK REFERRED TO UNLESS SPECIFICALLY OTHERWISE NOTED.

2) "INSTALL": TO ERECT, MOUNT AND CONNECT COMPLETE WITH RELATED ACCESSORIES.

3) "FURNISH" OR "SUPPLY": TO PURCHASE, PROCURE, ACQUIRE AND DELIVER COMPLETE WITH RELATED ACCESSORIES.

4) "WORK": LABOR, MATERIALS, EQUIPMENT, APPARATUS, CONTROLS, ACCESSORIES AND OTHER ITEMS REQUIRED FOR PROPER AND COMPLETE INSTALLATION.

5) "CONCEALED": EMBEDDED IN MASONRY OR OTHER CONSTRUCTION, INSTALLED IN FURRED SPACES, WITHIN DOUBLE PARTITIONS OR HUNG CEILINGS, IN TRENCHES, IN CRAWL SPACES, OR IN ENCLOSURES.

6) "EXPOSED": NOT INSTALLED UNDERGROUND OR "CONCEALED" AS DEFINED ABOVE.

7) "SIMILAR" OR "EQUAL": EQUAL IN MATERIALS, WEIGHT, SIZE, DESIGN AND EFFICIENCY OF SPECIFIED PRODUCT.

2. SCOPE OF WORK

A. THE WORK UNDER CONTRACT INCLUDES ALL LABOR, MATERIALS AND APPLIANCES NECESSARY FOR THE FURNISHING, INSTALLING AND TESTING, COMPLETE AND READY FOR SAFE OPERATION OF THE SYSTEMS. WORK SHALL BE INSTALLED IN A NEAT, WORKMANLIKE MANNER.

B. THE CONTRACTOR SHALL GIVE NECESSARY NOTICE, FILE DRAWINGS AND SPECIFICATIONS WITH THE DEPARTMENT HAVING JURISDICTION, OBTAIN PERMITS OR LICENSES NECESSARY TO CARRY OUT THIS WORK AND PAY ALL FEES THEREFORE. THE CONTRACTOR SHALL ARRANGE FOR INSPECTION AND TESTS OF ANY OR ALL PARTS OF THE WORK IF SO REQUIRED BY AUTHORITIES AND PAY ALL CHARGES FOR SAME. THE CONTRACTOR SHALL PAY ALL COSTS FOR, AND FURNISH TO THE OWNER BEFORE FINAL BILLING, ALL CERTIFICATES NECESSARY AS EVIDENCE THAT THE WORK INSTALLED CONFORMS WITH ALL REGULATIONS WHERE THEY APPLY TO THIS WORK.

C. THE CONTRACTOR SHALL FURNISH A WRITTEN GUARANTEE TO REPLACE OR REPAIR PROMPTLY AND ASSUME RESPONSIBILITY FOR ALL EXPENSES INCURRED FOR ANY WORKMANSHIP AND EQUIPMENT IN WHICH DEFECTS DEVELOP WITHIN ONE YEAR FROM THE DATE OF FINAL CERTIFICATE FOR PAYMENT AND/OR FROM DATE OR ACTUAL USE OF EQUIPMENT OR OCCUPANCY OF SPACES, BY OWNER, INCLUDED UNDER THE VARIOUS PARTS OF THE WORK, WHICHEVER DATE IS EARLIER. THIS WORK SHALL BE DONE AS DIRECTED BY THE OWNER. THIS GUARANTEE SHALL ALSO PROVIDE THAT WHERE DEFECTS OCCUR, THE CONTRACTOR WILL ASSUME RESPONSIBILITY FOR ALL EXPENSES INCURRED IN REPAIRING AND REPLACING WORK OF OTHER TRADES AFFECTED BY DEFECTS, REPAIRS OR REPLACEMENTS IN EQUIPMENT SUPPLIED BY THE CONTRACTOR.

D. SPECIAL INSPECTION BY A LICENSED PROFESSIONAL ENGINEER TO BE HIRED BY THIS CONTRACTOR.

E. PRIOR TO THE INSTALLATION OF ANY WORK AND PROCUREMENT OF EQUIPMENT PROVIDE COMPLETE SET OF COORDINATED SHOP DRAWINGS OF ALL NEW EQUIPMENT, DUCTWORK, PIPING AND CONTROL SYSTEMS INDICATING CAPACITY DIMENSIONS AND SEQUENCE OF OPERATION FOR WRITTEN APPROVAL BY THE AOR AND EOR.

3. SHOP DRAWINGS

A. INDICATE ON EACH SUBMISSION: PROJECT NAME AND LOCATION, ARCHITECT AND ENGINEER, ITEM IDENTIFICATION AND APPROVAL STAMP OF PRIME CONTRACTOR.

B. SUBMISSIONS:

1) SUBMISSIONS 11 IN. X 17 IN. OR SMALLER: IF THE SUBMISSION IS A CATALOG CUT, THEN THE CONTRACTOR SHALL SUBMIT ONE ORIGINAL AND TWO COPIES. OTHERWISE, HE SHALL SUBMIT THREE COPIES. THE ARCHITECT WILL FORWARD THE ORIGINAL AND ONE COPY (TWO COPIES WHEN NO ORIGINAL IS RECEIVED) TO THE ENGINEER. ALL CATALOG CUTS SHALL BE COMPLETE.

2) SUBMISSIONS LARGER THAN 11 IN. X 17 IN.: SUBMIT TWO PRINTS AND ONE PAPER SEPIA TO THE ARCHITECT. THE ARCHITECT WILL FORWARD ONE

C. SUBMIT SHOP DRAWINGS FOR THE FOLLOWING:
1) DUCTWORK LAYOUT AND SHEET METAL DESIGNS.
2) AIR OUTLETS.
3) AIR BALANCE REPORTS.
4) OPERATING SEQUENCES.
5) VIBRATION ISOLATION.
6) INSULATION.
7) AUTOMATIC CONTROL SYSTEMS AND DEVICES.

4. AS-BUILTS AND EQUIPMENT OPERATION INSTRUCTIONS

A. ON COMPLETION AND ACCEPTANCE OF WORK, THIS CONTRACTOR SHALL FURNISH WRITTEN INSTRUCTIONS, EQUIPMENT MANUALS AND DEMONSTRATE TO THE OWNER THE PROPER OPERATION AND MAINTENANCE OF ALL EQUIPMENT AND APPARATUS FURNISHED UNDER THIS CONTRACT.

B. THESE INSTRUCTIONS SHALL BE TYPED ON 8-1/2 IN. X 11 IN. PAPER AND BOUND IN THREE-RING BINDERS WITH CLEAR ACETATE COVERS. THE CONTRACTOR SHALL GIVE THREE COPIES OF THE INSTRUCTIONS TO THE OWNER AND ONE COPY TO THE ENGINEER.

C. THE INSTRUCTION BOOKLET SHALL BE ORGANIZED IN SECTIONS, WITH ONE SECTION PER SYSTEM. THE COVER OF THE INSTRUCTION BOOKLET SHALL BEAR THE NAME, ADDRESS AND PHONE NUMBER OF THE PROJECT, ARCHITECT, ENGINEER, MECHANICAL CONTRACTOR AND SUBCONTRACTORS.

D. REPRODUCIBLE "AS-BUILT" DRAWINGS INDICATING AS INSTALLED CONDITIONS SHALL BE PROVIDED TO THE ARCHITECT AFTER COMPLETION OF THE INSTALLATION.

E. PROVIDE "AS-BUILT" ON AUTOCAD 2010 OR EARLIER.

5. SHEET METAL WORK

A. EXCEPT AS OTHERWISE SHOWN OR NOTED, ALL DUCTWORK AND OTHER SHEET METAL WORK SHALL BE GALVANIZED SHEET STEEL AND SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITION OF SHEET METAL AND AIR CONDITIONING CONTRACTORS NATIONAL ASSOCIATION, INC.

DUCTWORK STATIC PRESSURE CLASSIFICATIONS

PRESSURE CLASS	OPERATING CLASS
2 IN. W.G.	UP TO 2 IN. W.G.
6 IN. W.G.	UP TO 6 IN. W.G.

DUCTWORK SEALING REQUIREMENT SHALL BE SEAL CLASS A.

B. VOLUME DAMPERS: GALVANIZED STEEL, PER SMACNA "LOW VELOCITY MANUAL", EXCEPT PROVIDE BEARING AT ONE END OF DAMPER ROD AND QUADRANT WITH LEVER AND LOCKSCREW AT OTHER END. FOR INSULATED DUCTS, QUADRANTS MOUNTED ON COLLAR TO CLEAR INSULATION. INSTALL WITH LEVERS ACCESSIBLE.

C. ACCESS DOORS: INSULATED OR UNINSULATED, SAME AS DUCT.

1) PROVIDE MINIMUM 20 IN. X 14 IN. ON MAIN DUCTS, AND 12 IN. X 6 IN. ON BRANCH DUCTS, UNLESS OTHERWISE APPROVED, AT ALL DUCT ACCESSORIES (FIRE/SMOKE DAMPERS, LOUVERS, SMOKE DETECTORS, AUTOMATIC DAMPERS).

2) ALL ACCESS DOORS TO BE HINGED, WITH LATCH SIMILAR TO VENTLOCK NO. 100.

D. FLEXIBLE CONNECTIONS: NEOPRENE-COATED GLASS FABRIC, 30 OZ PER SQ YD WITH SEWED AND CEMENTED SEAMS, SIMILAR TO VENT FABRICS. PROVIDE WITH METAL COLLARS. ALLOW MINIMUM MOVEMENT OF 1 IN.

E. TURNING VANES: GALVANIZED STEEL SMALL DOUBLE-THICKNESS VANES WITH 2 IN. INSIDE RADIUS.

F. ALL DUCT DIMENSIONS INDICATED ON PLANS ARE INSIDE CLEAR DIMENSIONS.

G. AUTOMATIC DAMPERS: COMPLETE WITH LINKAGE AND ELECTRIC OPERATOR. OPPOSED BLADE DAMPER, GALVANIZED STEEL MIN. 4 IN., MAX. 8 IN. WIDE WITH COMPRESSIBLE EDGE SEALS TO PREVENT LEAKAGE. FACTORY-ASSEMBLE STEEL LINKAGE AND SHAFT WITH NYLON OR OIL-IMPREGNATED BRONZE BEARINGS. MOTOR WITH SUFFICIENT POWER TO LIMIT LEAKAGE TO 10 CFM PER SQ FT. LINKAGE TO WITHSTAND LOAD EQUAL TO TWICE MAXIMUM OPERATING FORCE WITHOUT DEFLECTION. DAMPER MOUNTED IN WELDED STEEL CHANNEL FRAME.

6. AIR OUTLETS (ACCEPTABLE MANUFACTURERS: TITUS)

A. GENERAL:

1) MARGIN TYPES, COLORS, FINISH AND METHODS OF ATTACHMENT FOR ALL DIFFUSERS, GRILLES AND REGISTERS SHALL BE COORDINATED WITH ARCHITECTURAL CEILING AND WALL DETAILS AND SPECIFICATIONS.

2) FRAME TYPE SUITABLE FOR MOUNTING IN CEILING OR WALL CONSTRUCTION AS INDICATED ON ARCHITECTURAL PLANS.

3) EXACT LOCATION OF ALL AIR OUTLETS AS PER ARCHITECTURAL PLANS.

4) SUITABLE FOR OPERATION AT EXCESS AND 20 % CAPACITY FOR CONSTANT VOLUME SYSTEMS AND LESS THAN NOTED 60% LESS THAN NOTED CAPACITY FOR VARIABLE VOLUME SYSTEMS. MANUFACTURER RESPONSIBLE FOR EXAMINING APPLICATION OF EACH OUTLET AND GUARANTEE THAT EACH WILL PROVIDE REQUIRED NC LEVELS AND COMFORT SPACE CONDITIONS WITHOUT DRAFTS THROUGHOUT OPERATING RANGE.

5) ALL REGISTERS AND DIFFUSERS SHALL BE PROVIDED WITH OPPOSED BLADE VOLUME DAMPERS. DAMPER OPERATING LEVERS SHALL BE ACCESSIBLE AT THE FACE OF AIR OUTLETS.

B. REGISTERS, DIFFUSERS AND GRILLES:

1) SUPPLY REGISTERS: ALUMINUM CONSTRUCTION, ADJUSTABLE DOUBLE DEFLECTION ALUMINUM AIRFOIL LOUVERS, WITH VOLUME DAMPER. SIMILAR TO TITUS MODEL 300RL.

2) NON DUCTED TRANSFER EXHAUST AND RETURN GRILLES: STEEL CONSTRUCTION WITHOUT VOLUME DAMPER. SIMILAR TO TITUS PAR. DUCT TRANSFER AND EXHAUST REGISTER: WITH VOLUME DAMPER. SIMILAR TO TITUS 350 RL.

3) SQUARE SUPPLY DIFFUSERS: TITUS MODEL TMSA.

4) LINEAR SUPPLY DIFFUSER: EXTRUDED ALUMINUM CONSTRUCTION, AIR DEFLECTION VANE AND CABLE DAMPER IN EACH BRANCH TAP WITH 3 FEET CABLE TO DIFFUSER FACE. SIMILAR TO TITUS MODEL: ML.

7. TESTING AND BALANCING

A. AIR BALANCING SHALL BE ACCOMPLISHED BY ADJUSTMENT OF FANS AND BRANCH DAMPERS FOR MAJOR ADJUSTMENTS. ADJUSTMENT OF TERMINAL DAMPERS AND DEVICES SHALL BE FOR TRIM OR MINOR ADJUSTMENT ONLY. THIS SHALL BE DONE TO PERMIT THE LEAST NOISE GENERATION IN THE TERMINAL AREAS AND UTILIZE MINIMUM FAN ENERGY.

B. WATER BALANCING SHALL BE ACCOMPLISHED BY ADJUSTMENT OF BALANCING VALVES AT PUMPS FOR PROPER FLOW. ADJUST FLOW THROUGH COILS AS REQUIRED.

C. UPON COMPLETION OF THE INSTALLATION, THE CONTRACTOR SHALL BALANCE AIR DISTRIBUTION SYSTEM AND WATER DISTRIBUTION SYSTEMS. THE CONTRACTOR TO TRAVERSE THE BASE BUILDING SUPPLY DUCT TO THE FLOORS AND SUPPLY DUCT FROM THE SUPPLEMENTAL AC UNITS.

D. THE CONTRACTOR SHALL PROVIDE ALL LABOR, PRESSURE GAUGES, FLOW METERS, SHEAVES, AND BELTS REQUIRED TO BALANCE SYSTEMS.

E. BALANCING REPORT SHALL BE PROVIDED ON AABC-TYPE FORMS.

F. FANS, AIR HANDLING UNITS, AND COILS SHALL BE BALANCED TO WITHIN +5%°F THEIR DESIGN CAPACITIES. ALL OTHER AIR AND WATER QUANTITIES SHALL BE BALANCED TO WITHIN +10 % OF THE DESIGN QUANTITIES.

G. BALANCING AND TESTING SHALL BE PERFORMED AND SUPERVISED BY ONE OF THE FOLLOWING INDEPENDENT FIRMS SPECIALIZING IN TESTING AND BALANCING: (BUILDING ENGINEERS TO BE PRESENT DURING TESTING & BALANCING)

1) MERENDINO ASSOCIATES, INC.
2) ALL CITY TESTING AND BALANCING.
3) INDEPENDENT TESTING AND BALANCING.

H. THE PERFORMANCE AND CAPACITY OF ALL SYSTEMS AND EQUIPMENT TO BE DEMONSTRATED BY THE CONTRACTOR.

I. LEAKAGE TEST ON KITCHEN EXHAUST DUCTWORK.

8. INSULATION – GENERAL REQUIREMENTS

A. ALL INSULATION MATERIALS, INCLUDING JACKETS, FACING, ADHESIVE, COATINGS, AND ACCESSORIES ARE TO BE FIRE HAZARD RATED AND LISTED BY UNDERWRITERS LABORATORIES, INC. USING STEINER TUNNEL TEST METHOD FOR FIRE HAZARD CLASSIFICATION OF BUILDING MATERIALS, STANDARD UL 723 (ASTM E-84), (ASA A2.5-1963). FLAMESPREAD: MAXIMUM 25. FUEL CONTRIBUTED AND SMOKE DEVELOPED: MAXIMUM 50. FLAMEPROOFING TREATMENTS SUBJECT TO DETERIORATION FROM MOISTURE OR HUMIDITY ARE NOT ACCEPTABLE.

B. DEFINITIONS:

1) CONCEALED: INDOOR DUCTS, PIPING OR EQUIPMENT WHICH IS NOT EXPOSED.

9. PIPING INSULATION

A. INSULATE ALL PIPING IN ACCORDANCE WITH INSULATION SCHEDULE EXCEPT AS OTHERWISE NOTED. ALL PIPING SHALL BE LABELED FOR IDENTIFYING THE SYSTEMS.

INSULATION SCHEDULE – PIPING

SERVICE	LOW TEMP 40 TO 100°F	FITTINGS & VALVES LOW TEMP 40 TO 100°F	HOT 100 TO 250°F	FITTINGS & VALVES HOT 100 TO 250°F
SIZE	UP TO 1.5" / 1.5" AND UP	UP TO 1.5" / 1.5" AND UP	UP TO 1.5" / 1.5" AND UP	UP TO 1.5" / 1.5" AND UP
THICKNESS	1 1/2" / 2"	1 1/2" / 2"	1 1/2" / 2"	1 1/2" / 2"
MATERIAL	P-1	P-4	P-1	P-4
FINISH	VAPORSEAL	VAPORSEAL F-1	---	F-1

B. PIPING, VALVES AND FITTINGS TO BE INSULATED:

a. REFRIGERANT PIPING
b. CONDENSATE DRAIN PIPING

C. MATERIAL:

1) TYPE P-1: MINIMUM 4 LB DENSITY MOLDED FIBERGLASS, MAXIMUM 0.23 K-FACTOR AT 75°F MEAN TEMPERATURE WITH FACTORY-APPLIED FIRE-RETARDANT FOIL-SKRIM-KRAFT FACING. ALL SERVICE JACKET. SIMILAR TO OWENS-CORNING 650 ASJ.

2) TYPE P-3: MINIMUM 4 LB DENSITY MOLDED FIBERGLASS FITTING, MAXIMUM 0.23 K-FACTOR AT 75°F MEAN TEMPERATURE SIMILAR TO EPOLUX HAMFAB MOLDED FITTINGS.

3) TYPE P-4: MINIMUM 1 LB DENSITY FIBERGLASS FITTING INSERTS, MAXIMUM 0.28 K-FACTOR AT 75°F MEAN TEMPERATURE SIMILAR TO MANVILLE HI-LO TEMP INSULATION INSERTS.

4) TYPE P-6: MINIMUM 6 LB MOLDED FOAMED PLASTIC. MAXIMUM 0.27 K-FACTOR AT 75°F MEAN TEMPERATURE. MAXIMUM 0.17 PERMEANCE. SIMILAR TO ARMSTRONG ARMAFLEX II.

D. FINISH:

1) TYPE F-1: FITTING COVER, MOLDED WHITE PVC JACKET, UL CLASS 1, MAXIMUM PERMEANCE 0.05 SIMILAR TO MANVILLE ZESTRON.

2) TYPE F-2: WHITE VAPOR BARRIER COATING WITH 10X10 OR 20X20 MESH WHITE GLASS, POLYESTER OR NYLON CLOTH REINFORCING MEMBRANE, MINIMUM 31 MIL DRY FILM THICKNESS, SIMILAR TO FOSTER TITE-FIT, UL LABEL.

3) TYPE F-4: ALUMINUM JACKETING WITH MINIMUM 0.016 IN. WALL THICKNESS AND LONGITUDINAL JOINTS WITH LOCK SEAMS.

4) TYPE F-6: WHITE FINISHING AND INSULATING CEMENT APPLIED OVER HEXAGONAL WIRE MESH. CEMENT SIMILAR TO KEENE SUPERSLICK.

E. INSTALLATION:

1) BEFORE APPLYING INSULATION ALL PRESSURE AND LEAK TESTS SHALL BE COMPLETED AND APPROVED.

2) ALL INSULATION SHALL BE BUTTED FIRMLY TOGETHER. PROVIDE 2 IN. LAMP STRIPS AT ALL SEAMS SECURED WITH ADHESIVE. USE VAPOR BARRIER TAPE AND VAPORSEAL ADHESIVE WHERE REQUIRED. STAPLES NOT PERMITTED. REFRIGERANT PIPING INSULATION SHALL HAVE MITERED FITTINGS.

3) ALL INSULATION AND VAPOR BARRIERS SHALL BE CONTINUOUS PASSING THROUGH SLEEVES, HANGERS, ETC. OR OTHER OPENINGS. PROVIDE SADDLES OR SHIELDS FOR PROTECTION.

4) INSULATION FOR STRAINERS OR OTHER FITTINGS OR ACCESSORIES REQUIRING SERVICING OR INSPECTION SHALL HAVE INSULATION REMOVABLE AND REPLACEABLE WITHOUT DAMAGE.

10. DUCTWORK INSULATION:

A. INSULATE ALL DUCTWORK IN ACCORDANCE WITH INSULATION SCHEDULE EXCEPT AS OTHERWISE NOTED:

INSULATION SCHEDULE

SERVICE	SUPPLY	OUTDOOR AIR INTAKE	SUPPLY/RETURN	EXHAUST
SIZE	CONCEALED	ALL	EXPOSED	MER EXPOSED
THICKNESS	1"	2"	1"	2"
MATERIAL	D-1	D-3	D-2	D-3
FINISH	VAPORSEAL	VAPORSEAL	VAPORSEAL	VAPORSEAL

B. REINSULATE ALL DUCTWORK AND PIPING WHICH IS EXISTING AND DAMAGED DURING CONSTRUCTION OR SHOWN OR REQUIRED TO BE RELOCATED. INSULATE WITH SAME MATERIAL AND THICKNESS.

C. NON-INSULATED DUCTWORK:

1) WHERE SOUNDLINING IS OF MINIMUM THICKNESS SPECIFIED FOR INSULATION.

2) AIR CONDITIONING RETURN AIR DUCTWORK EXPOSED IN AIR CONDITIONED SPACES AND INSTALLED IN HUNG CEILINGS WHERE SPACE IMMEDIATELY ABOVE AND BELOW ARE BOTH AIR CONDITIONED.

D. MATERIAL:

1) TYPE D-1: MINIMUM 1-LB DENSITY FIBERGLASS BLANKET, MAXIMUM 0.28 K-FACTOR AT 75° MEAN TEMPERATURE WITH FACTORY-APPLIED FOIL-SKRIM-KRAFT FACING SIMILAR TO MANVILLE MICROLITE.

2) TYPE D-2: 3 LB FIBERGLASS BOARD. THE MAXIMUM K-FACTOR SHALL BE 0.23 AT 75°F MEAN TEMPERATURE WITH A MINIMUM DENSITY OF 3-LB. THE INSULATION SHALL BE PROVIDED WITH A FACTORY-APPLIED ALL PURPOSE OR ALL SERVICE FACING. THE INSULATION SHALL BE EQUAL TO MANVILLE TYPE 814 SPIN-GLAS AP.

3) TYPE D-3: MINIMUM 6 LB FIBERGLASS BOARD. MAXIMUM 0.22 K-FACTOR AT 75° MEAN TEMPERATURE WITH FACTORY APPLIED ALL PURPOSE OR ALL SERVICE FACING. SIMILAR TO MANVILLE 817 SPIN-GLAS AP.

E. INSTALLATION:

1) FIBERGLASS BLANKET: 2 INCH LAP STRIPS AT ALL SEAMS. SECURE BOTTOM OF ALL DUCTS OVER 24 INCH WIDE WITH MINIMUM 2 ROWS OF WELD PINS 12 INCH O CENTER. SECURE ALL SEAMS WITH FOIL VAPOR BARRIER TAPE AND VAPORSEAL ADHESIVE.

2) FIBERGLASS BOARD: SEAL JOINTS AND BREAKS IN FACING WITH 3 INCH WIDE TAPE TO MATCH FACING AND ADHERE WITH VAPORSEAL ADHESIVE. APPLY 5 INCH WIDE TAPE AT CORNERS, WELD PINS ON TOP, SIDES AND BOTTOM.

11. VIBRATION ISOLATION

A. GENERAL:

1) PROVIDE ISOLATION FOR EQUIPMENT, PIPING AND DUCTWORK.

2) INSTALL IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.

3) PROVIDE LEVELING DEVICES AND APPROVED RESILIENT RESTRAINING DEVICES AS REQUIRED TO LIMIT EQUIPMENT AND PIPING MOTION IN EXCESS OF 1/4 IN.

4) ACCEPTABLE MANUFACTURERS:
a. MASON INDUSTRIES, INC.
c. KORFUND DYNAMICS CORP.
b. VIBRATION ELIMINATOR CO.

B. CEILING-HUNG FANS AND EQUIPMENT:

1) ALL SUSPENDED AC UNITS SHALL BE HUNG FROM COMBINATION SPRING/NEOPRENE HANGERS SUCH AS MASON INDUSTRIES TYPE SON HANGERS HAVING A MINIMUM 1.25" STATIC DEFLECTION.

2) ALL FANS SHALL BE HUNG FROM MASON TYPE HD HANGERS HAVING A MINIMUM STATIC DEFLECTION OF 0.35".


3) PROVIDE SUPPLEMENTAL STEEL AS REQUIRED WHERE EQUIPMENT OR STRUCTURE CANNOT SUPPORT POINT LOADS.

END OF SPECIFICATIONS

ACE
ALL CITY ENGINEERING, P.C.
33 Great Neck Road #3
Great Neck, NY 11021
(516)321-9490
info@allcityengineering.com

OWNER:
SEAFARERS INTERNATIONAL HOUSE
123 EAST 15TH STREET
NEW YORK, NY 1003
TEL: (212) 677-4800
EMAIL: LUCAS@SIHNYC.ORG

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION
01/08/26	BID SET	

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

18 VESEY STREET
MANHATTAN, NY
BLOCK: 88 LOT: 4

DRAWING TITLE:

MECHANICAL SPECIFICATION

DATE:	01/06/2026
PROJECT No.:	25086
CHECKED BY:	XX
DRAWN BY:	PY/LZ/BL

SEAL AND SIGNATURE

DWG. No.:
BE-600.00

Sheets: 08 of 08

N.Y.C D.O.B No. :
M01244603-S5