

Scope of the revision

- 1. Perimeter linear supply diffusers along the window walls, each in a **plenum box O.D. 48x4x26 with 1/2" lining** (4 ft), fed by a short **12x10 branch** (one 10x8) with **VD / CO** off the perimeter supply main.
- 2. Per the sketching note on the shop drawings: coordinate soffit openings with the GC; field-adjust branch duct offsets as needed to clear existing framing and align with linear diffuser locations.
- 3. Each bubbled area is numbered by floor and shown with its shop drawing screenshot, followed by a quantity page per floor. Branch lengths are as dimensioned on the shop drawings; main duct lengths inside the clouds are approximate and listed for reference only.
- 4. This breakdown carries no pricing. See the open questions before pricing.

Open questions before pricing

- 1. What is removed or credited: the Bulletin 3 design served the perimeter with ceiling linear diffusers (G tags) set in from the window line. Which of those, and their branch duct, are deleted, and are any already installed?
- 2. Perimeter mains inside the clouds (flat oval 26.1/10 to 34.4/12): existing to remain with new taps only, or new / rerouted? The 29-1 corner shows a 26.1/10 offset down and reroute along Broadway.
- 3. Linear diffusers and plenum boxes: furnished by us (F&I) or diffuser by others? Slot count / finish per architect.
- 4. VD/CO: tagged on all 29th / 30th floor connections except 29-3 (2 of 6) and 29-6 (3 of 4); most 31st floor connections untagged. Assume a VD with concealed operator on every connection?
- 5. Soffit openings, access and patching by GC. M-531 title block still dated 08/17/2026.

Summary by floor


Floor	Bubbled areas	Linear diffusers / plenum boxes	Supply CFM	12x10 branches	10x8 branches	VD / CO (tagged)
29th floor (M-529)	6	23	6,400	22	1	18
30th floor (M-530)	3	12	3,300	12	-	12
31st floor (M-531)	6	14	3,800	14	-	3
Total	15	49	13,500	48	1	33

Bubbled areas

Area	Location	Diffusers	CFM
29-1	North-east corner, W 42nd St / Broadway	4	1,200
29-2	Seventh Ave, north	3	800
29-3	Seventh Ave, Open Office 29.42	6	1,600
29-4	Broadway, north	2	400
29-5	Seventh Ave, south (north end of sheet B)	4	1,200
29-6	Seventh Ave, south	4	1,200
30-1	Seventh Ave, north	3	800
30-2	Seventh Ave, Open Office 30.35	5	1,300
30-3	South wall (W 41st St side)	4	1,200
31-1	Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51)	2	400
31-2	Seventh Ave, Huddle Rms 31.46 / 31.47	3	800
31-3	Seventh Ave, at IDF 31.44 (match line)	1	300
31-4	Seventh Ave, 7P Meeting Rm 31.43	3	900
31-5	Seventh Ave, south	3	800
31-6	Broadway, south	2	600
	Total	49	13,500

29th Floor - M-529 SD R2: Bubbled Areas

23 perimeter linear diffusers in plenum boxes O.D. 48x4x26 w/ 1/2" lining, 6,400 CFM | quantities on next page

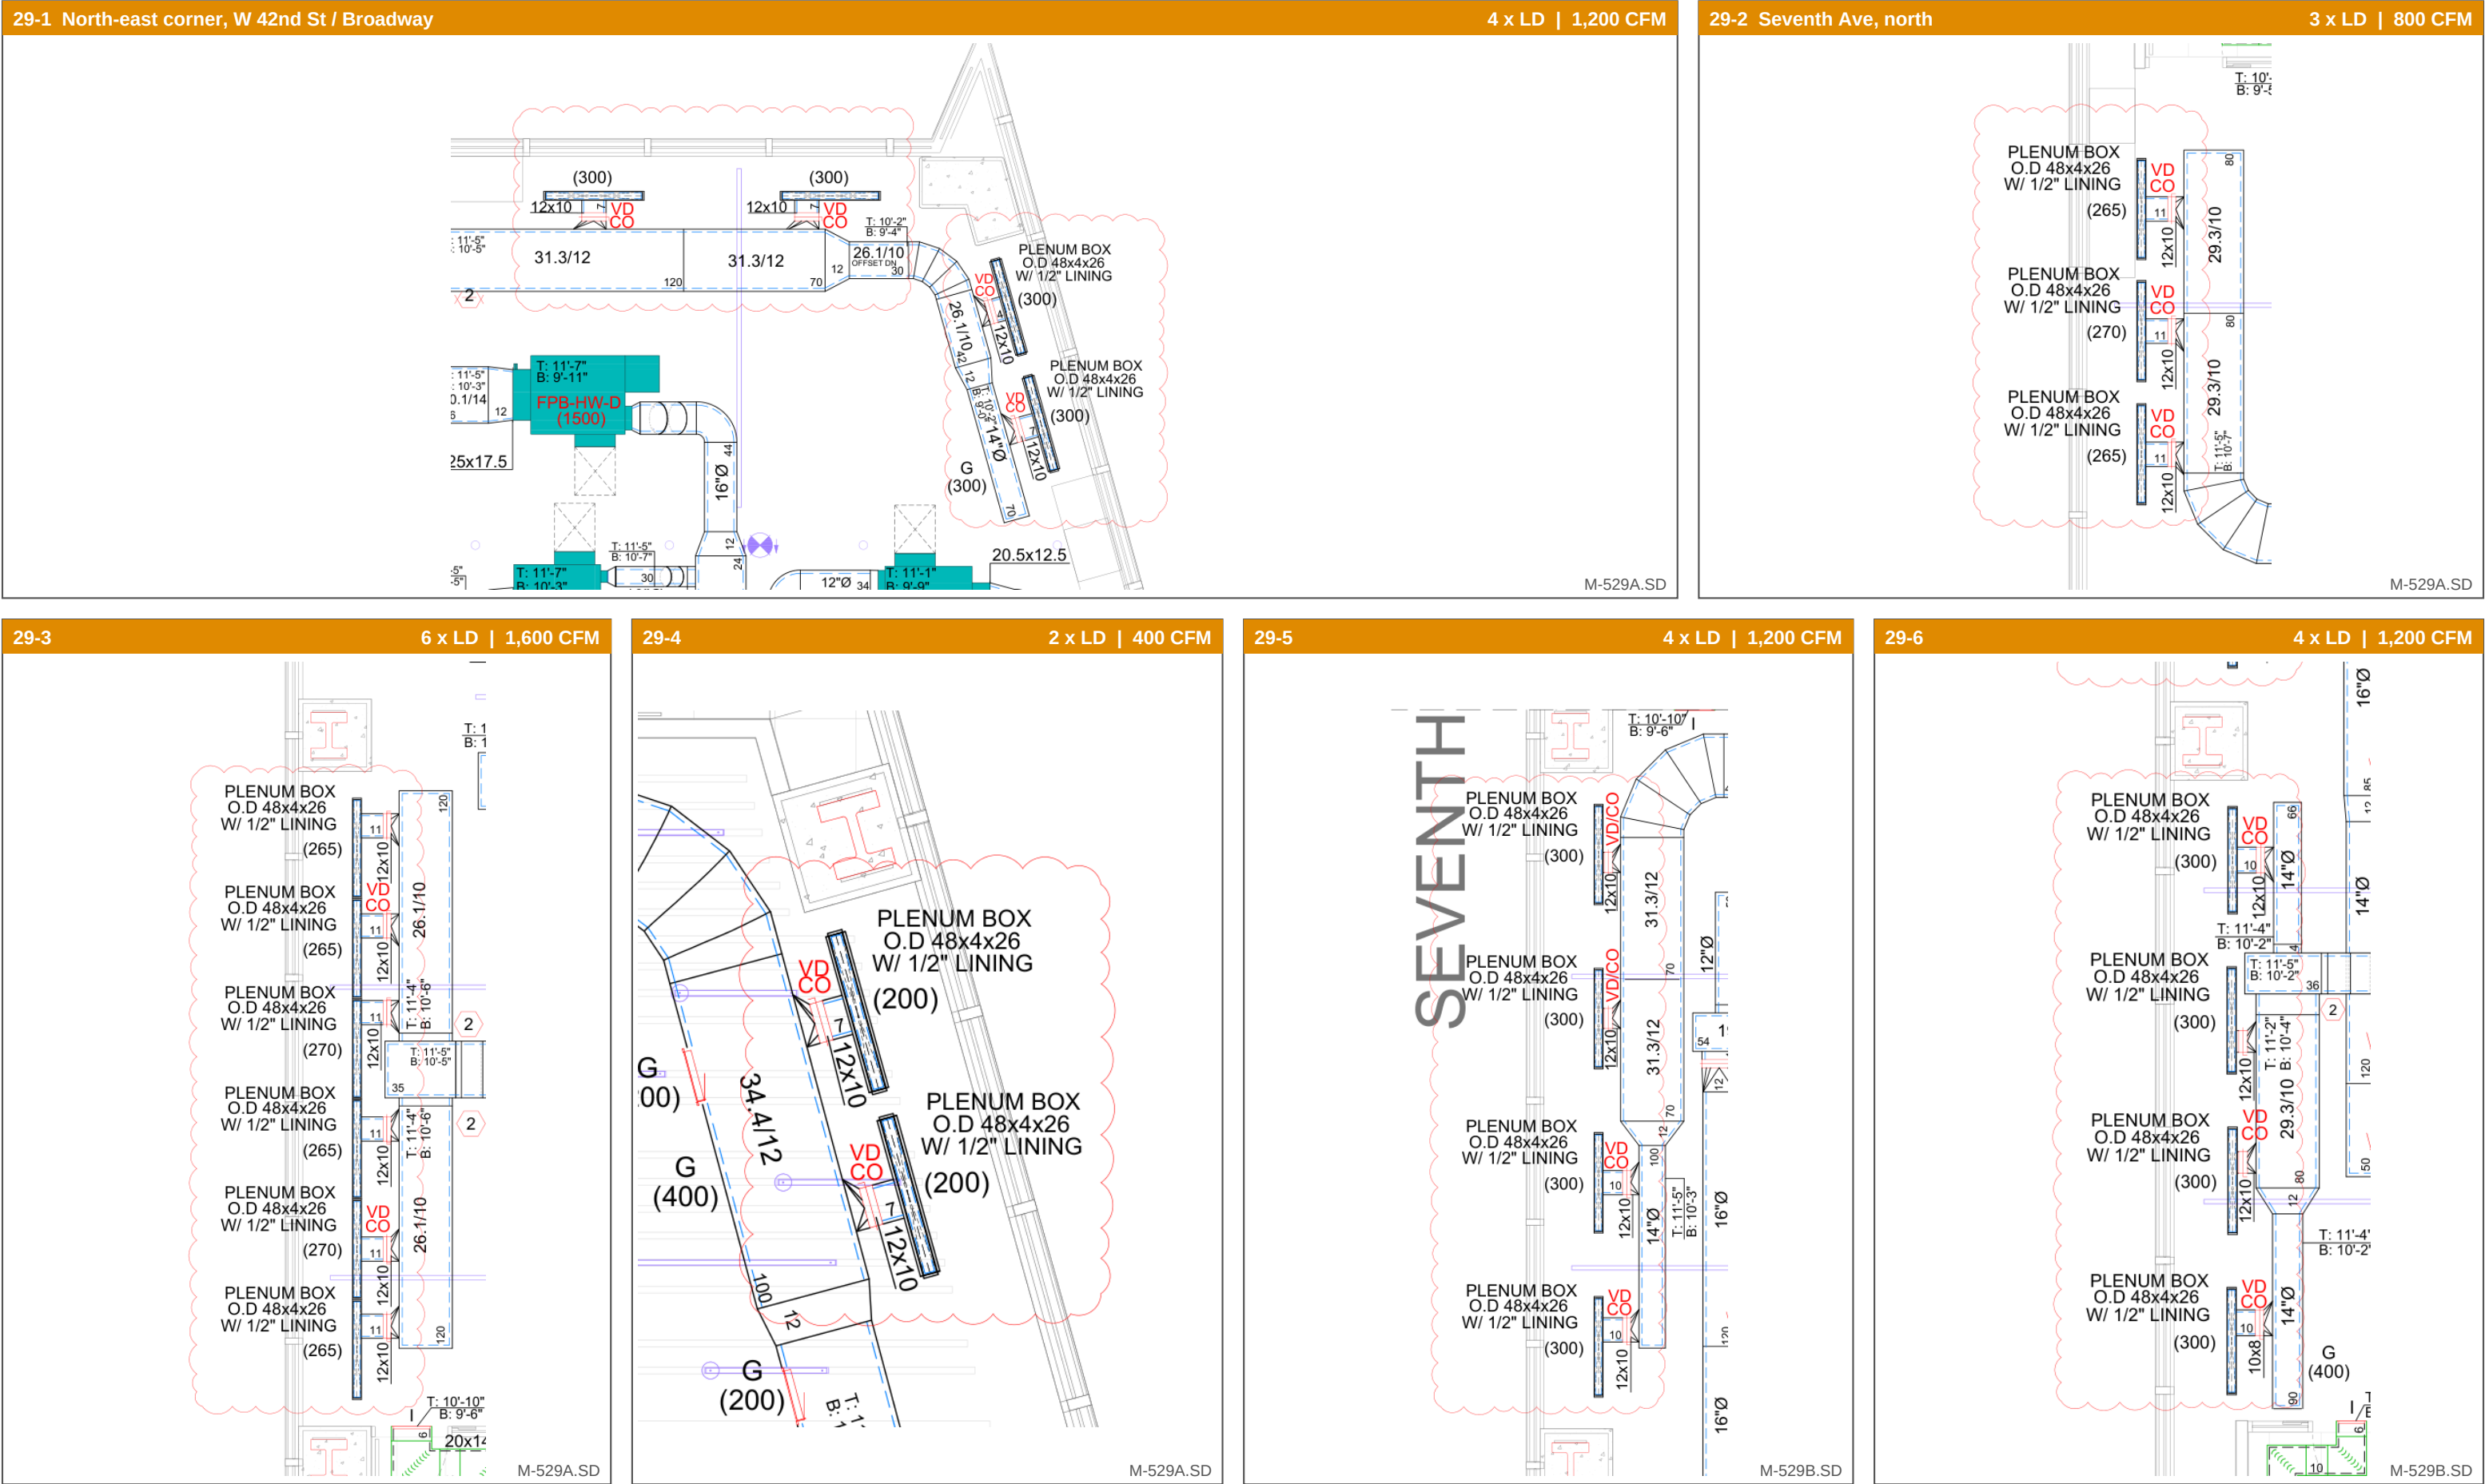

29th Floor - M-529 SD R2: Scope and Quantities



LD = linear supply diffuser in plenum box O.D. 48x4x26 (4 ft) w/ 1/2" lining | VD/CO as tagged | branch lengths as dimensioned, mains approximate


Area	Location / scope	LD qty	CFM each (total)	Branches	VD/CO tagged	Perimeter main in bubbled area (reference only)
29-1	North-east corner, W 42nd St / Broadway F&I 4 perimeter linear diffusers with plenum boxes; 4 branch taps off main with VD/CO, insulation, soffit coordination. 2 diffusers along 42nd St off the 31.3/12 main, 2 along Broadway off the 26.1/10 / 14"Ø run.	4	300 / 300 / 300 / 300 (1,200)	4 x 12x10, 25 in total	4	31.3/12 approx. 16 LF; 26.1/10 with offset down approx. 6 LF; 14"Ø approx. 6 LF
29-2	Seventh Ave, north F&I 3 perimeter linear diffusers with plenum boxes; 3 branch taps off main with VD/CO, insulation, soffit coordination.	3	265 / 270 / 265 (800)	3 x 12x10, 33 in total	3	29.3/10 approx. 13 LF
29-3	Seventh Ave, Open Office 29.42 F&I 6 perimeter linear diffusers with plenum boxes; 6 branch taps off main with VD/CO, insulation, soffit coordination. VD/CO tagged on 2 of 6 connections.	6	265 / 265 / 270 / 265 / 270 / 265 (1,600)	6 x 12x10, 66 in total	2	26.1/10 approx. 20 LF (with tee)
29-4	Broadway, north F&I 2 perimeter linear diffusers with plenum boxes; 2 branch taps off main with VD/CO, insulation, soffit coordination.	2	200 / 200 (400)	2 x 12x10, 14 in total	2	34.4/12 approx. 8 LF
29-5	Seventh Ave, south (north end of sheet B) F&I 4 perimeter linear diffusers with plenum boxes; 4 branch taps off main with VD/CO, insulation, soffit coordination.	4	300 / 300 / 300 / 300 (1,200)	4 x 12x10, 40 in total	4	31.3/12 approx. 12 LF; 14"Ø approx. 8 LF
29-6	Seventh Ave, south F&I 4 perimeter linear diffusers with plenum boxes; 4 branch taps off main with VD/CO, insulation, soffit coordination. Last connection 10x8. VD/CO tagged on 3 of 4.	4	300 / 300 / 300 / 300 (1,200)	3 x 12x10, 30 in total 1 x 10x8, 10 in total	3	14"Ø approx. 13 LF; 29.3/10 approx. 7 LF
	29th floor total	23	6,400	22 x 12x10 1 x 10x8	18	

29th floor material list (for pricing)

Item	Qty	Unit
Perimeter linear supply diffuser, 48" (slots / finish per architect)	23	EA
Plenum box O.D. 48x4x26 with 1/2" lining, side inlet	23	EA
12x10 branch duct, main tap to plenum box (as dimensioned, 208 in total)	22	EA
10x8 branch duct, main tap to plenum box (as dimensioned, 10 in total)	1	EA
Volume damper with operator (VD/CO) at each branch	23	EA
Branch duct insulation, connections, hangers, sealing	23	EA
Air balance of new diffusers	23	EA

Key plan

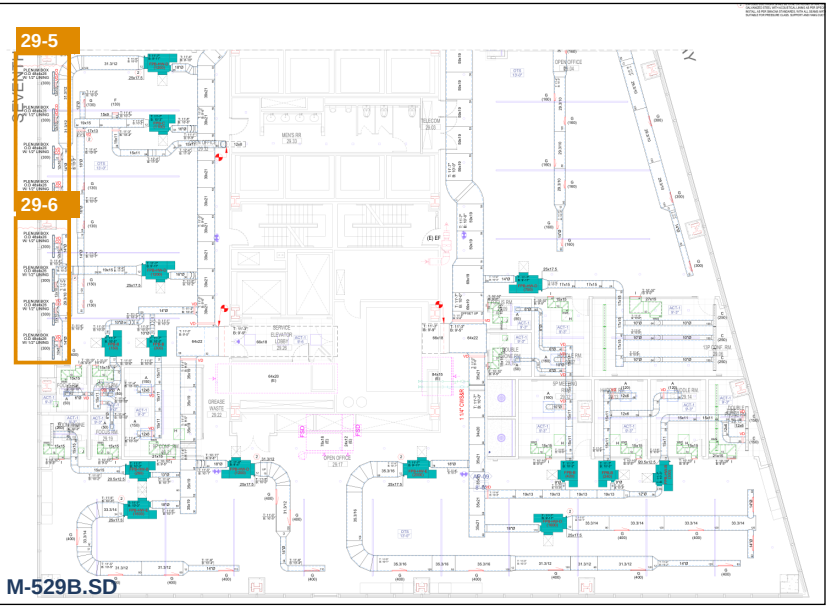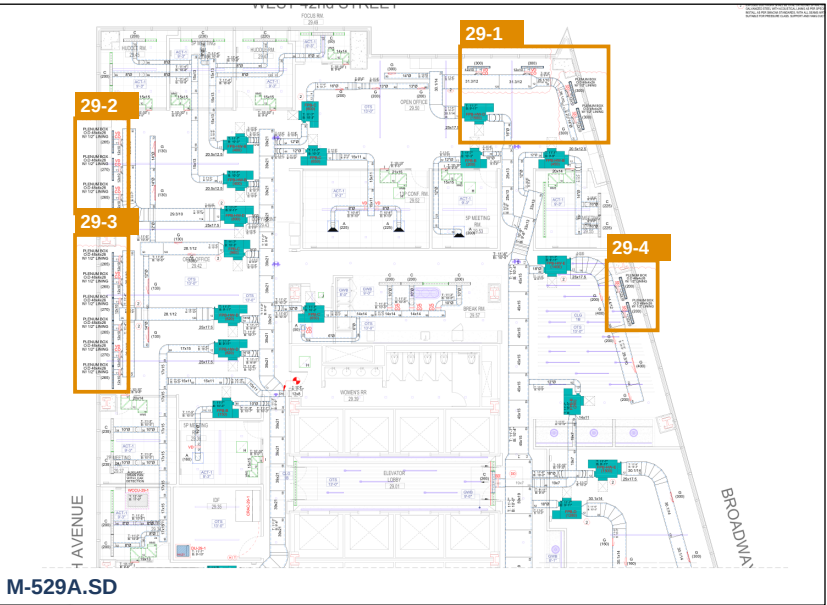

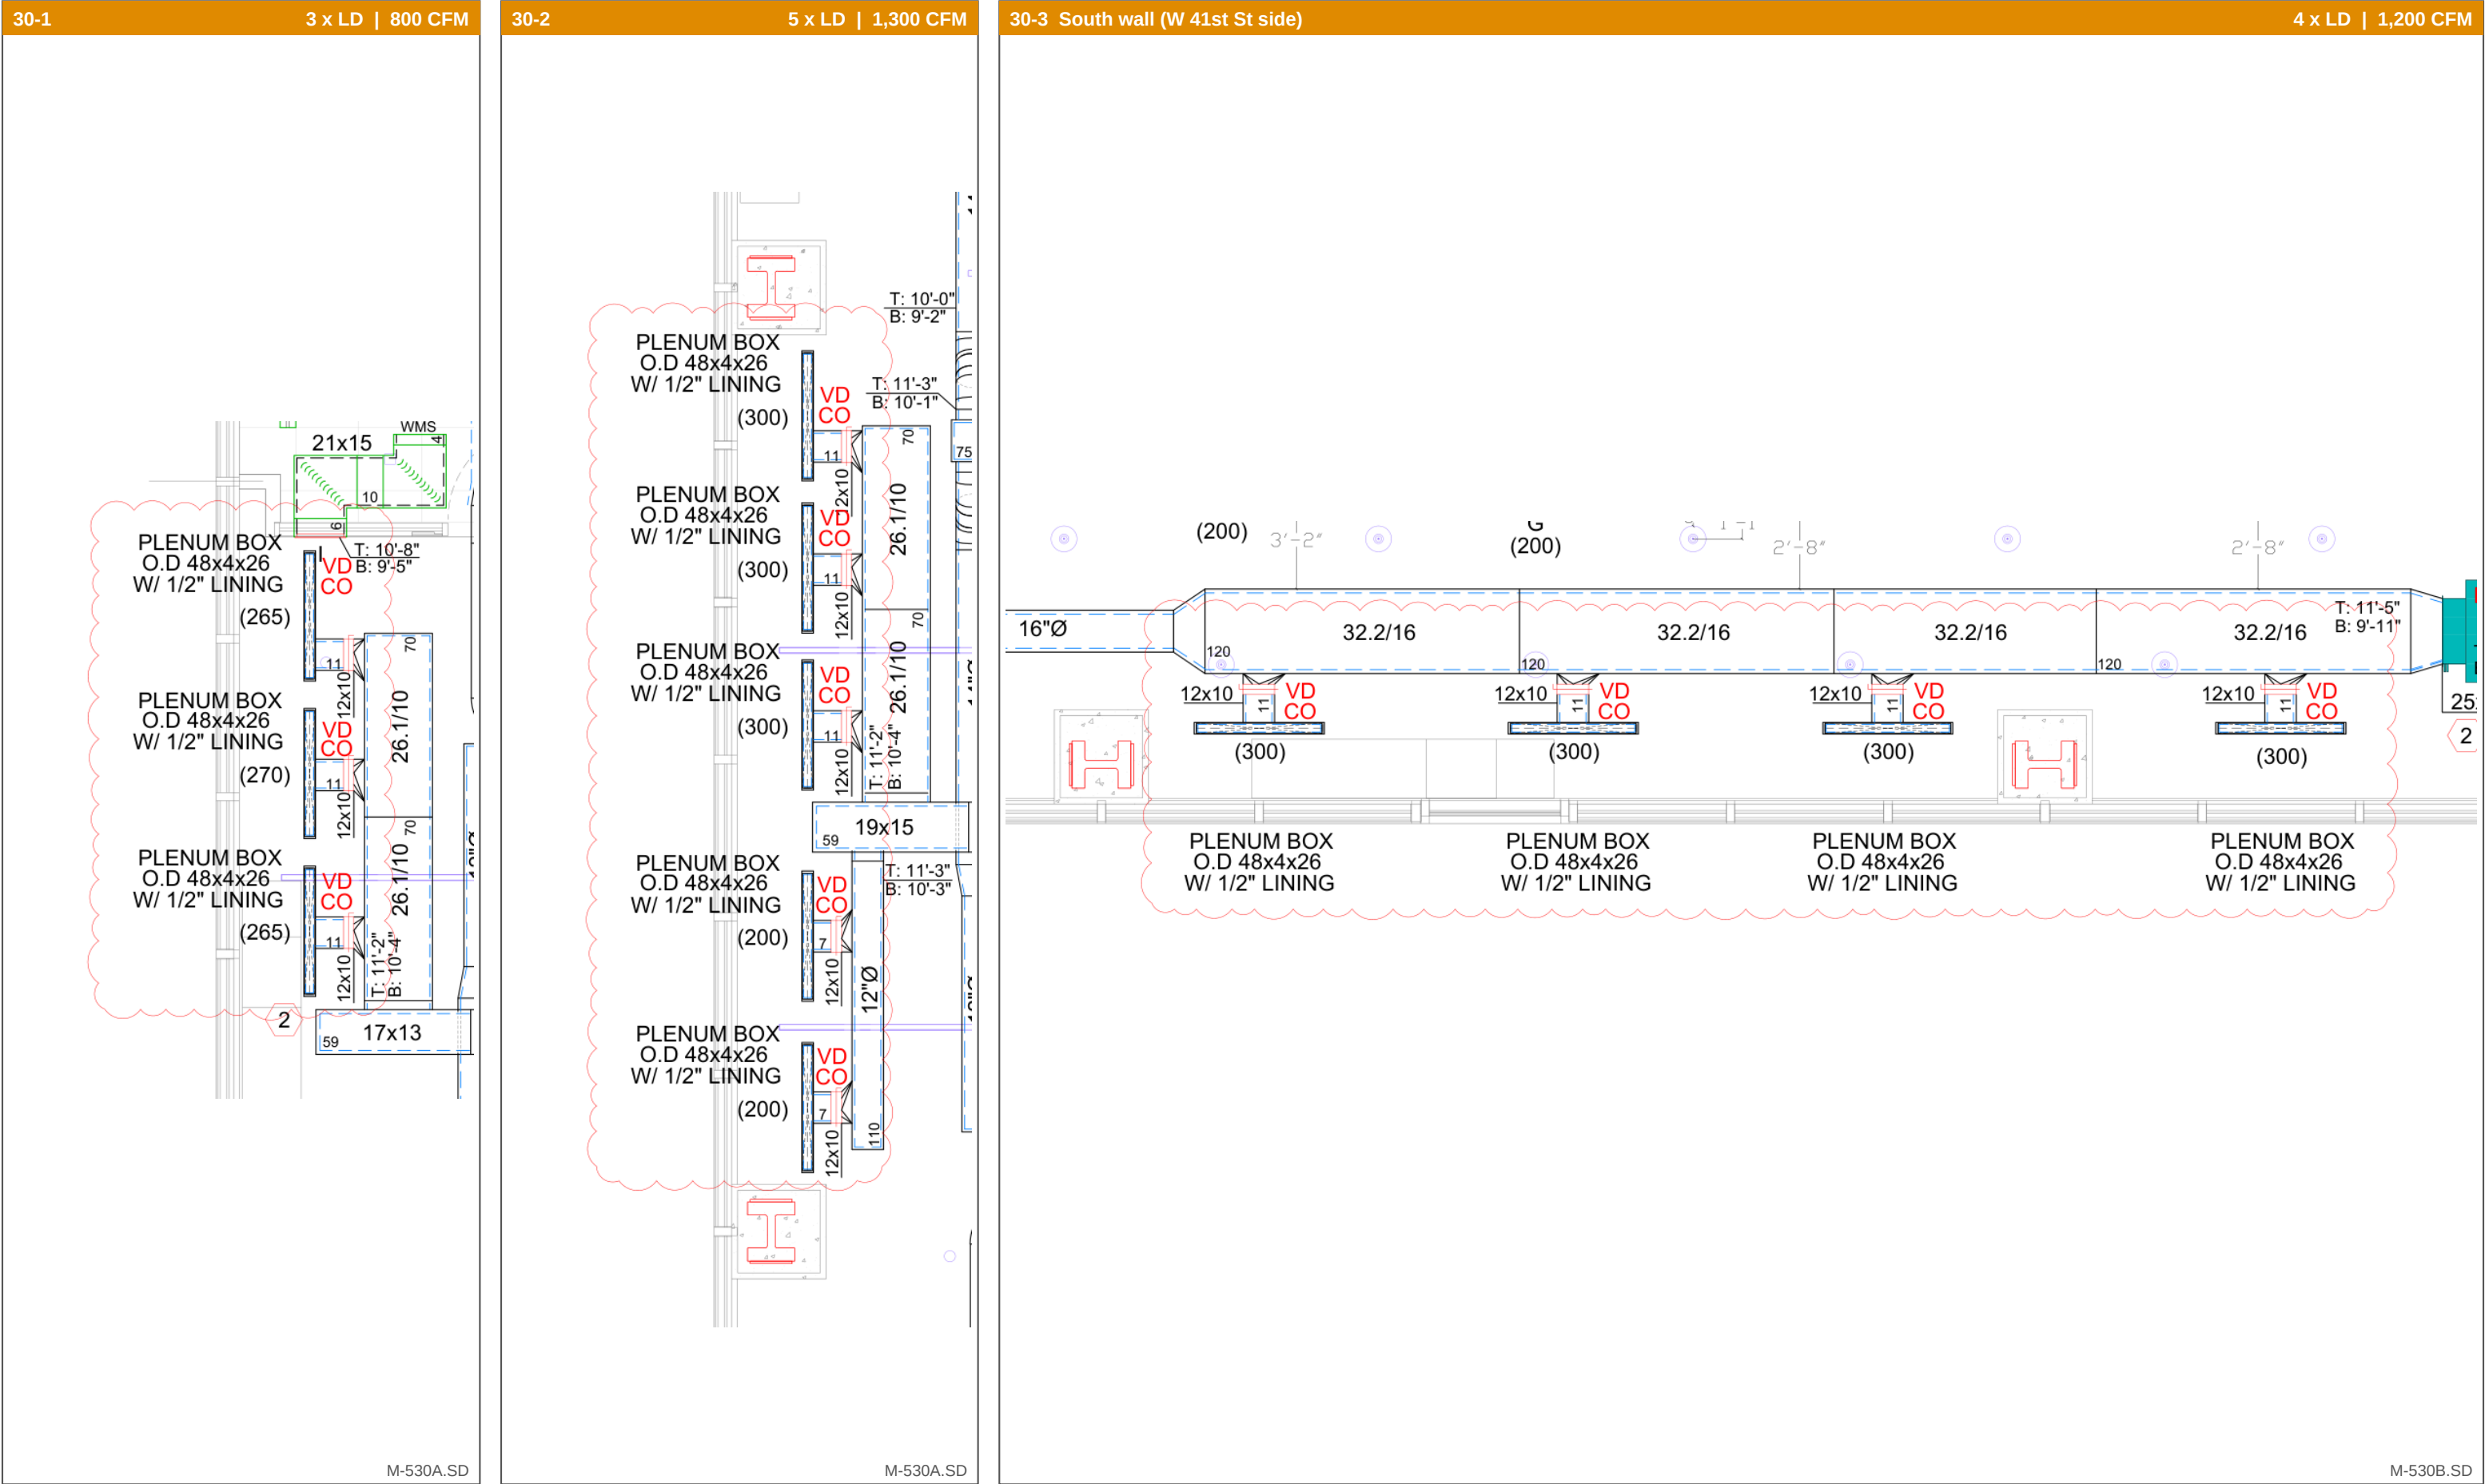

30th Floor - M-530 SD R2: Scope and Quantities


LD = linear supply diffuser in plenum box O.D. 48x4x26 (4 ft) w/ 1/2" lining | VD/CO as tagged | branch lengths as dimensioned, mains approximate

Area	Location / scope	LD qty	CFM each (total)	Branches	VD/CO tagged	Perimeter main in bubbled area (reference only)
30-1	Seventh Ave, north F&I 3 perimeter linear diffusers with plenum boxes; 3 branch taps off main with VD/CO, insulation, soffit coordination.	3	265 / 270 / 265 (800)	3 x 12x10, 33 in total	3	26.1/10 approx. 12 LF
30-2	Seventh Ave, Open Office 30.35 F&I 5 perimeter linear diffusers with plenum boxes; 5 branch taps off main with VD/CO, insulation, soffit coordination. 3 off the 26.1/10, 2 off the 12"Ø below the 19x15.	5	300 / 300 / 300 / 200 / 200 (1,300)	5 x 12x10, 47 in total	5	26.1/10 approx. 12 LF; 12"Ø approx. 9 LF
30-3	South wall (W 41st St side) F&I 4 perimeter linear diffusers with plenum boxes; 4 branch taps off main with VD/CO, insulation, soffit coordination.	4	300 / 300 / 300 / 300 (1,200)	4 x 12x10, 44 in total	4	32.2/16 approx. 40 LF
	30th floor total	12	3,300	12 x 12x10	12	

30th floor material list (for pricing)


Item	Qty	Unit
Perimeter linear supply diffuser, 48" (slots / finish per architect)	12	EA
Plenum box O.D. 48x4x26 with 1/2" lining, side inlet	12	EA
12x10 branch duct, main tap to plenum box (as dimensioned, 124 in total)	12	EA
Volume damper with operator (VD/CO) at each branch	12	EA
Branch duct insulation, connections, hangers, sealing	12	EA
Air balance of new diffusers	12	EA

Key plan

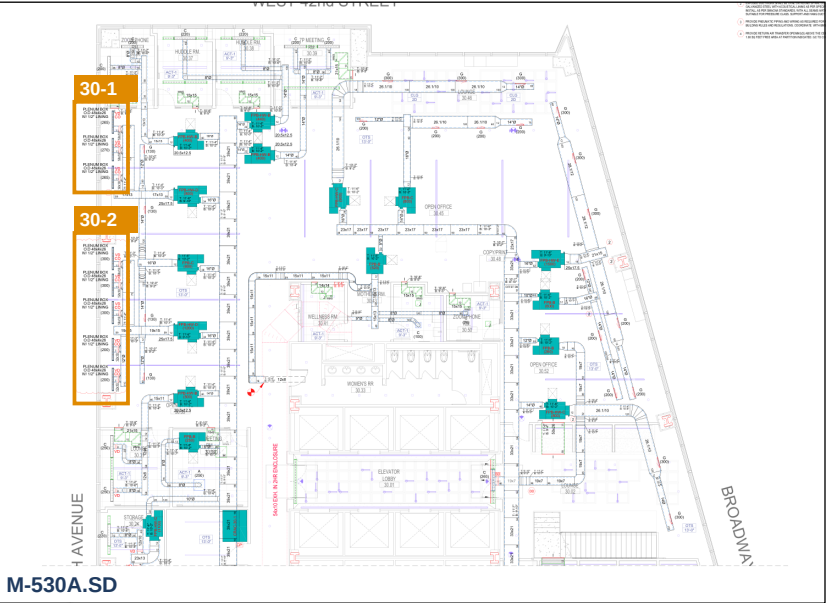


31-1 Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51)

2 x LD | 400 CFM

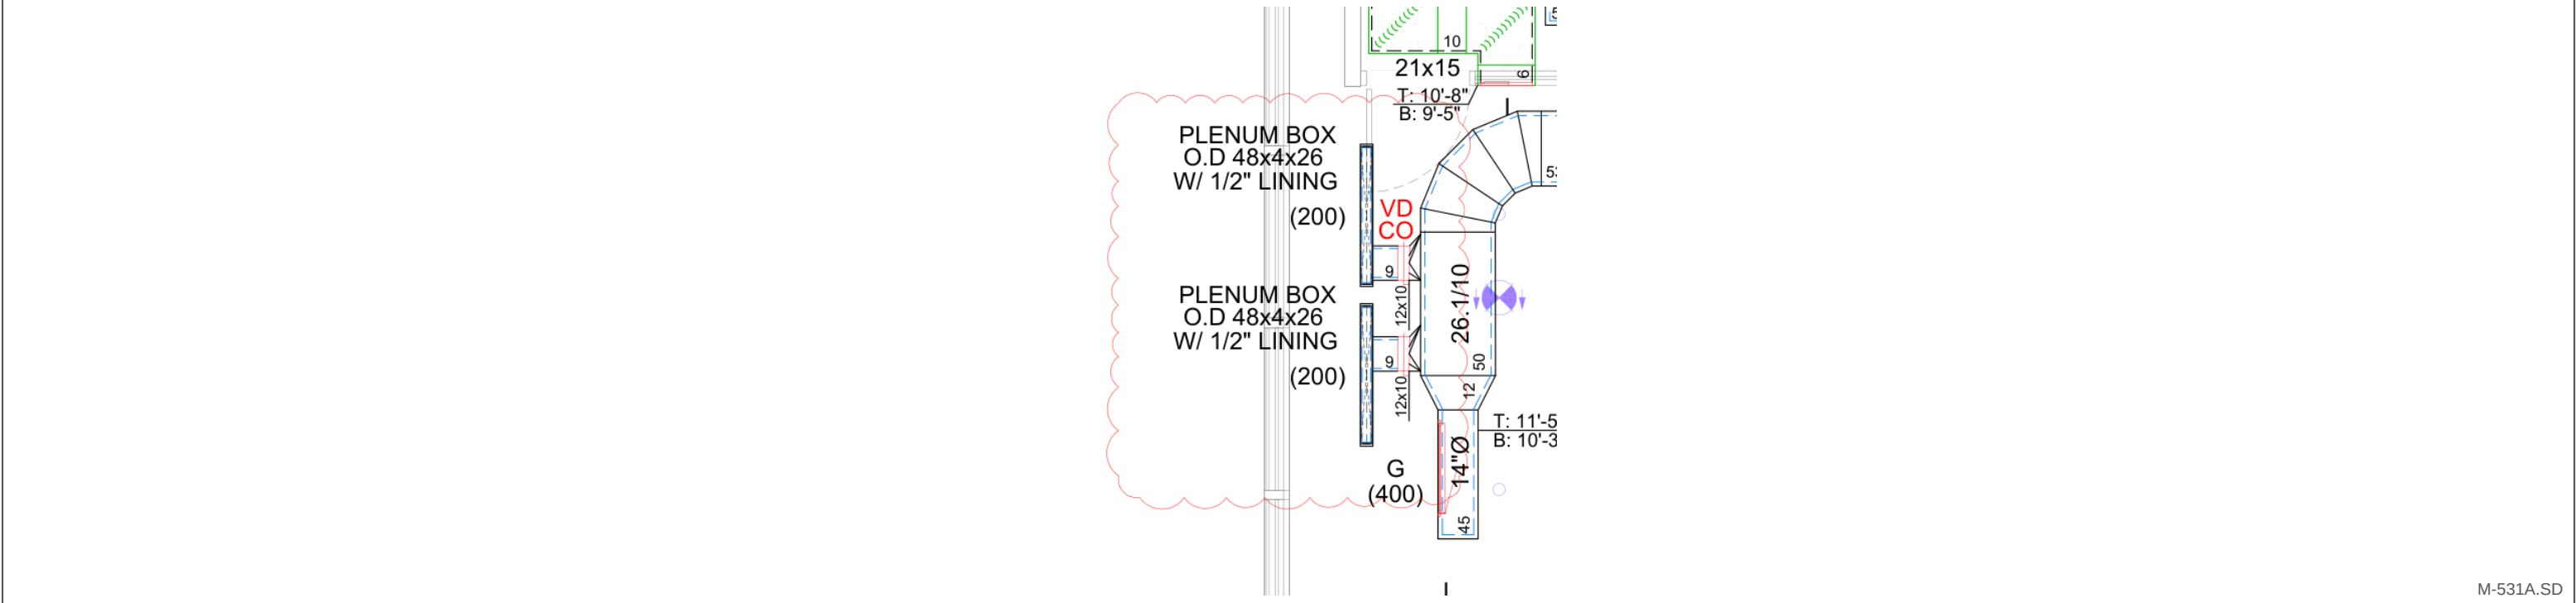


31-2

3 x LD | 800 CFM

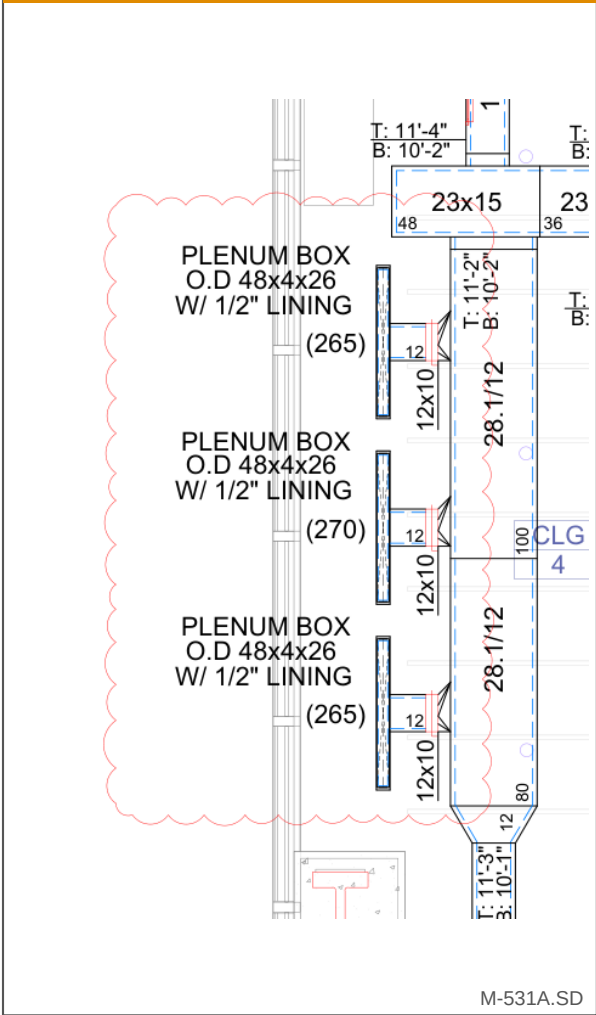


31-3

1 x LD | 300 CFM

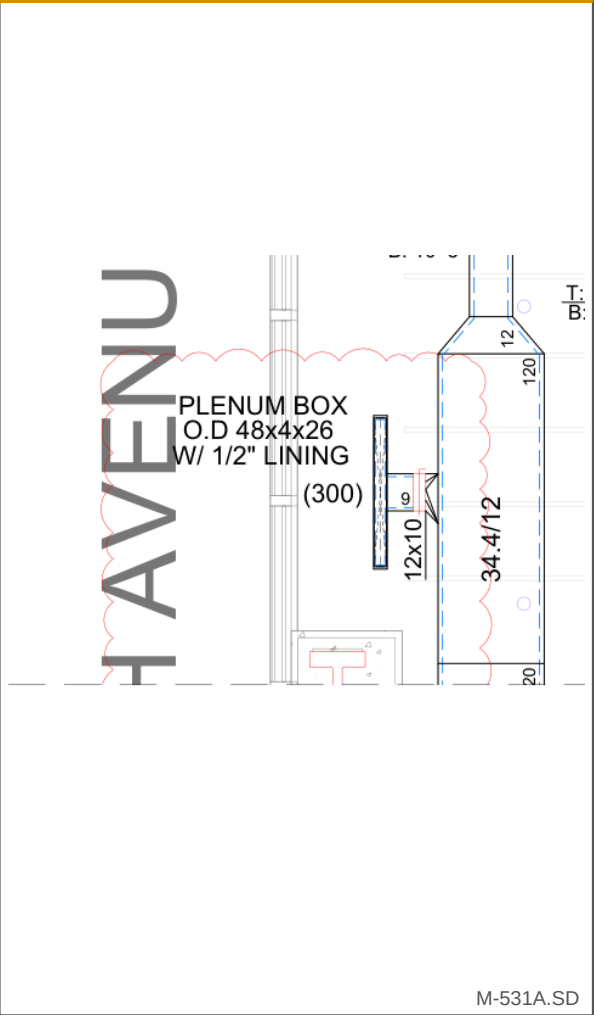


31-4

3 x LD | 900 CFM

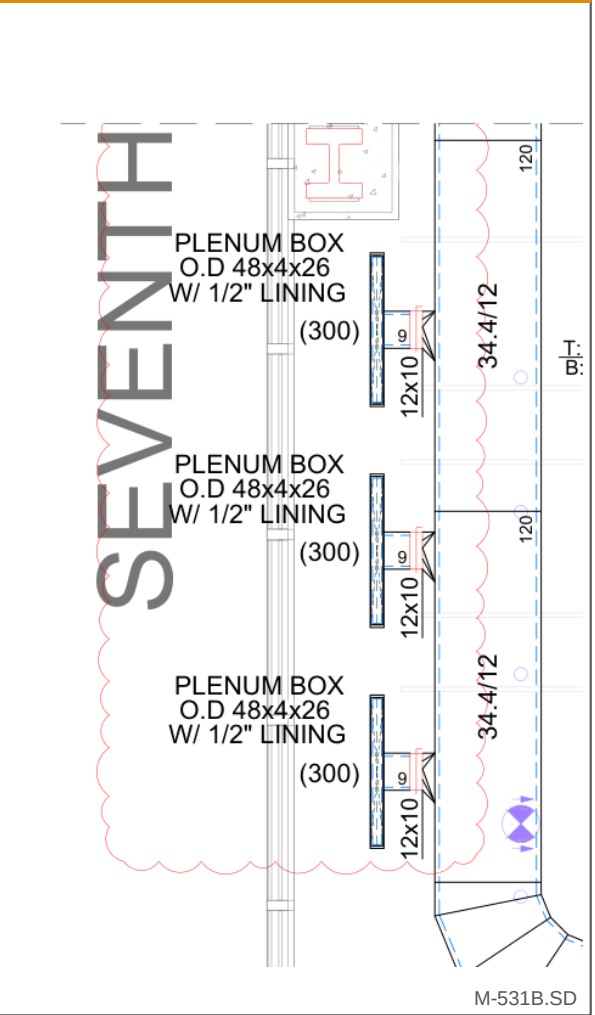


31-5

3 x LD | 800 CFM

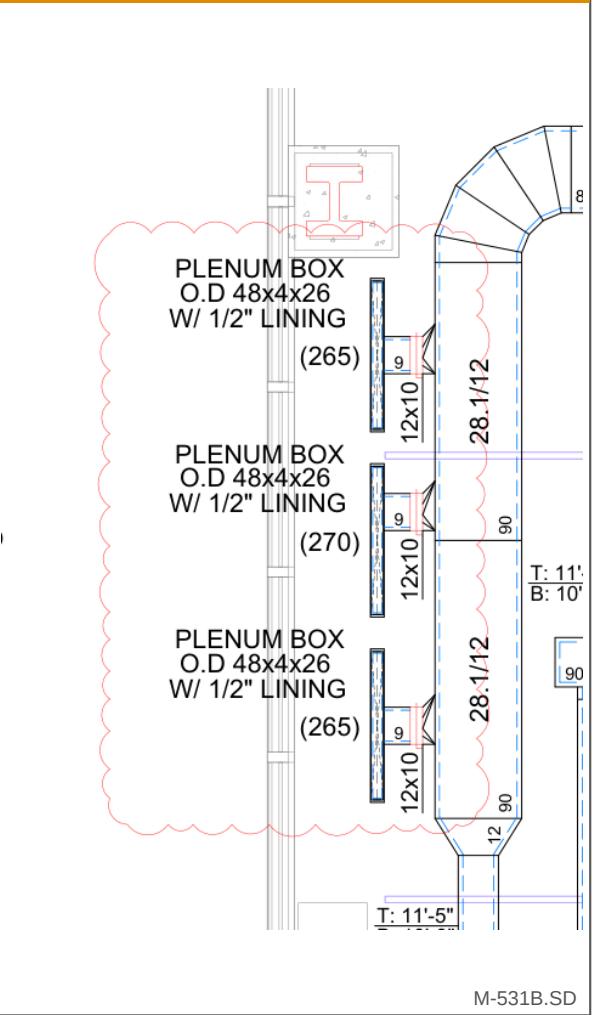

31-6

2 x LD | 600 CFM

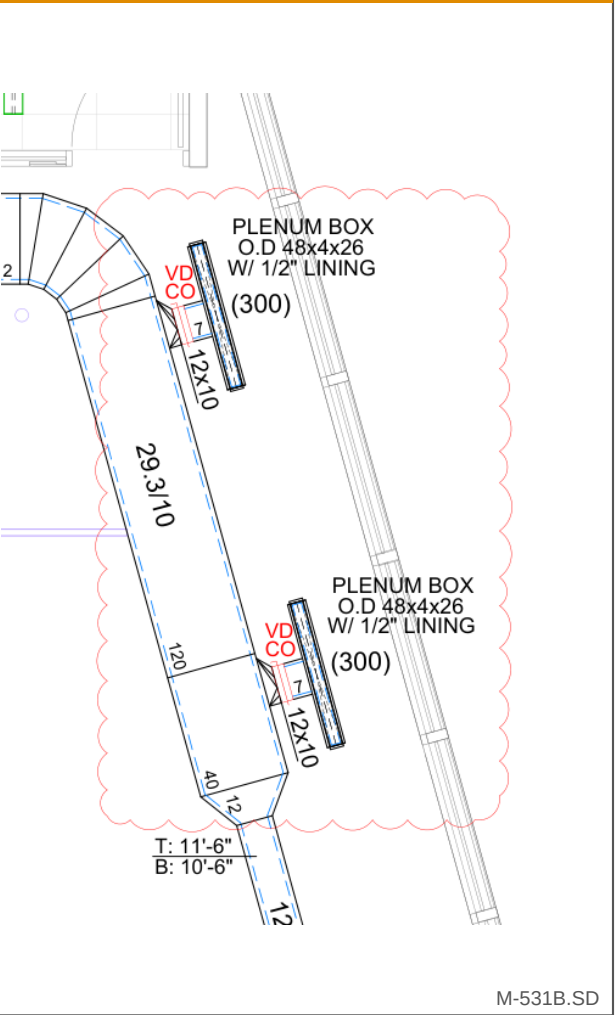

31st Floor - M-531 SD R2: Scope and Quantities

LD = linear supply diffuser in plenum box O.D. 48x4x26 (4 ft) w/ 1/2" lining | VD/CO as tagged | branch lengths as dimensioned, mains approximate

Area	Location / scope	LD qty	CFM each (total)	Branches	VD/CO tagged	Perimeter main in bubbled area (reference only)
31-1	Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51) F&I 2 perimeter linear diffusers with plenum boxes; 2 branch taps off main with VD/CO, insulation, soffit coordination.	2	200 / 200 (400)	2 x 12x10, 18 in total	1	26.1/10 approx. 4 LF (at elbow)
31-2	Seventh Ave, Huddle Rms 31.46 / 31.47 F&I 3 perimeter linear diffusers with plenum boxes; 3 branch taps off main with VD/CO, insulation, soffit coordination. No VD/CO tags shown.	3	265 / 270 / 265 (800)	3 x 12x10, 36 in total	-	28.1/12 approx. 15 LF
31-3	Seventh Ave, at IDF 31.44 (match line) F&I 1 perimeter linear diffuser with plenum box; 1 branch tap off main with VD/CO, insulation, soffit coordination. No VD/CO tag shown.	1	300 (300)	1 x 12x10, 9 in total	-	34.4/12 (same run as 31-4)
31-4	Seventh Ave, 7P Meeting Rm 31.43 F&I 3 perimeter linear diffusers with plenum boxes; 3 branch taps off main with VD/CO, insulation, soffit coordination. No VD/CO tags shown.	3	300 / 300 / 300 (900)	3 x 12x10, 27 in total	-	34.4/12 approx. 20 LF
31-5	Seventh Ave, south F&I 3 perimeter linear diffusers with plenum boxes; 3 branch taps off main with VD/CO, insulation, soffit coordination. No VD/CO tags shown.	3	265 / 270 / 265 (800)	3 x 12x10, 27 in total	-	28.1/12 approx. 15 LF
31-6	Broadway, south F&I 2 perimeter linear diffusers with plenum boxes; 2 branch taps off main with VD/CO, insulation, soffit coordination.	2	300 / 300 (600)	2 x 12x10, 14 in total	2	29.3/10 approx. 13 LF
	31st floor total	14	3,800	14 x 12x10	3	

31st floor material list (for pricing)

Item	Qty	Unit
Perimeter linear supply diffuser, 48" (slots / finish per architect)	14	EA
Plenum box O.D. 48x4x26 with 1/2" lining, side inlet	14	EA
12x10 branch duct, main tap to plenum box (as dimensioned, 131 in total)	14	EA
Volume damper with operator (VD/CO) at each branch	14	EA
Branch duct insulation, connections, hangers, sealing	14	EA
Air balance of new diffusers	14	EA

Key plan

