A: 'LEAD LAG PUMP CONTROLLER' = Siemens relays RE-1..5

CONDENSER WATER PUMPS
LOCATION & SERVES: SEE SCHEDULE

LEAD LAG PUMP CONTROLLER

- RIBU1C RE-1 (3)
- RIBU1C RE-3(3)
- RIBU1C RE-2(3)
- RIBU1C RE-4(3)
- RIBU1C RE-5(3)

DRAWING NOTES:


1. LEAK DETECTOR PROVIDED BY SIEMENS.
2. VFD MOUNTED IN CEILING NEAR PUMP SET.
3. REFER BELOW SCHEDULE FOR NEAREST DXR.

B: note 2 'VFD mounted in ceiling' - no separate VFD

CWP SCHEDULE		
UNIT TAG	LOCATION	SERVES
CWP-29-1,2	OPEN OFFICE 29.17	CRAC-29-1
CWP-30-1,2	DISH ROOM 30.13	CRAC-30-1
CWP-31-1,2	STORAGE 31.15	CRAC-31-1

TAG	FLOOR	NEAREST DXR	DEVICE
CWP-29-1	29	FPB-29-15	LD-1
CWP-29-1	29	FPB-29-16	FS-1 ALARM
CWP-29-2	29	FPB-29-17	LD-2
CWP-29-2	29	FPB-29-18	FS-2 ALARM
CWP-30-1	30	FPB-30-16	LD-1
CWP-30-1	30	FPB-30-19	FS-1 ALARM
CWP-30-2	30	FPB-30-20	LD-2
CWP-30-2	30	FPB-30-21	FS-2 ALARM
CWP-31-1	31	FPB-31-10	LD-1
CWP-31-1	31	FPB-31-11	FS-1 ALARM
CWP-31-2	31	FPB-31-12	LD-2
CWP-31-2	31	FPB-31-14	FS-2 ALARM

C: FS-1 'FBO'

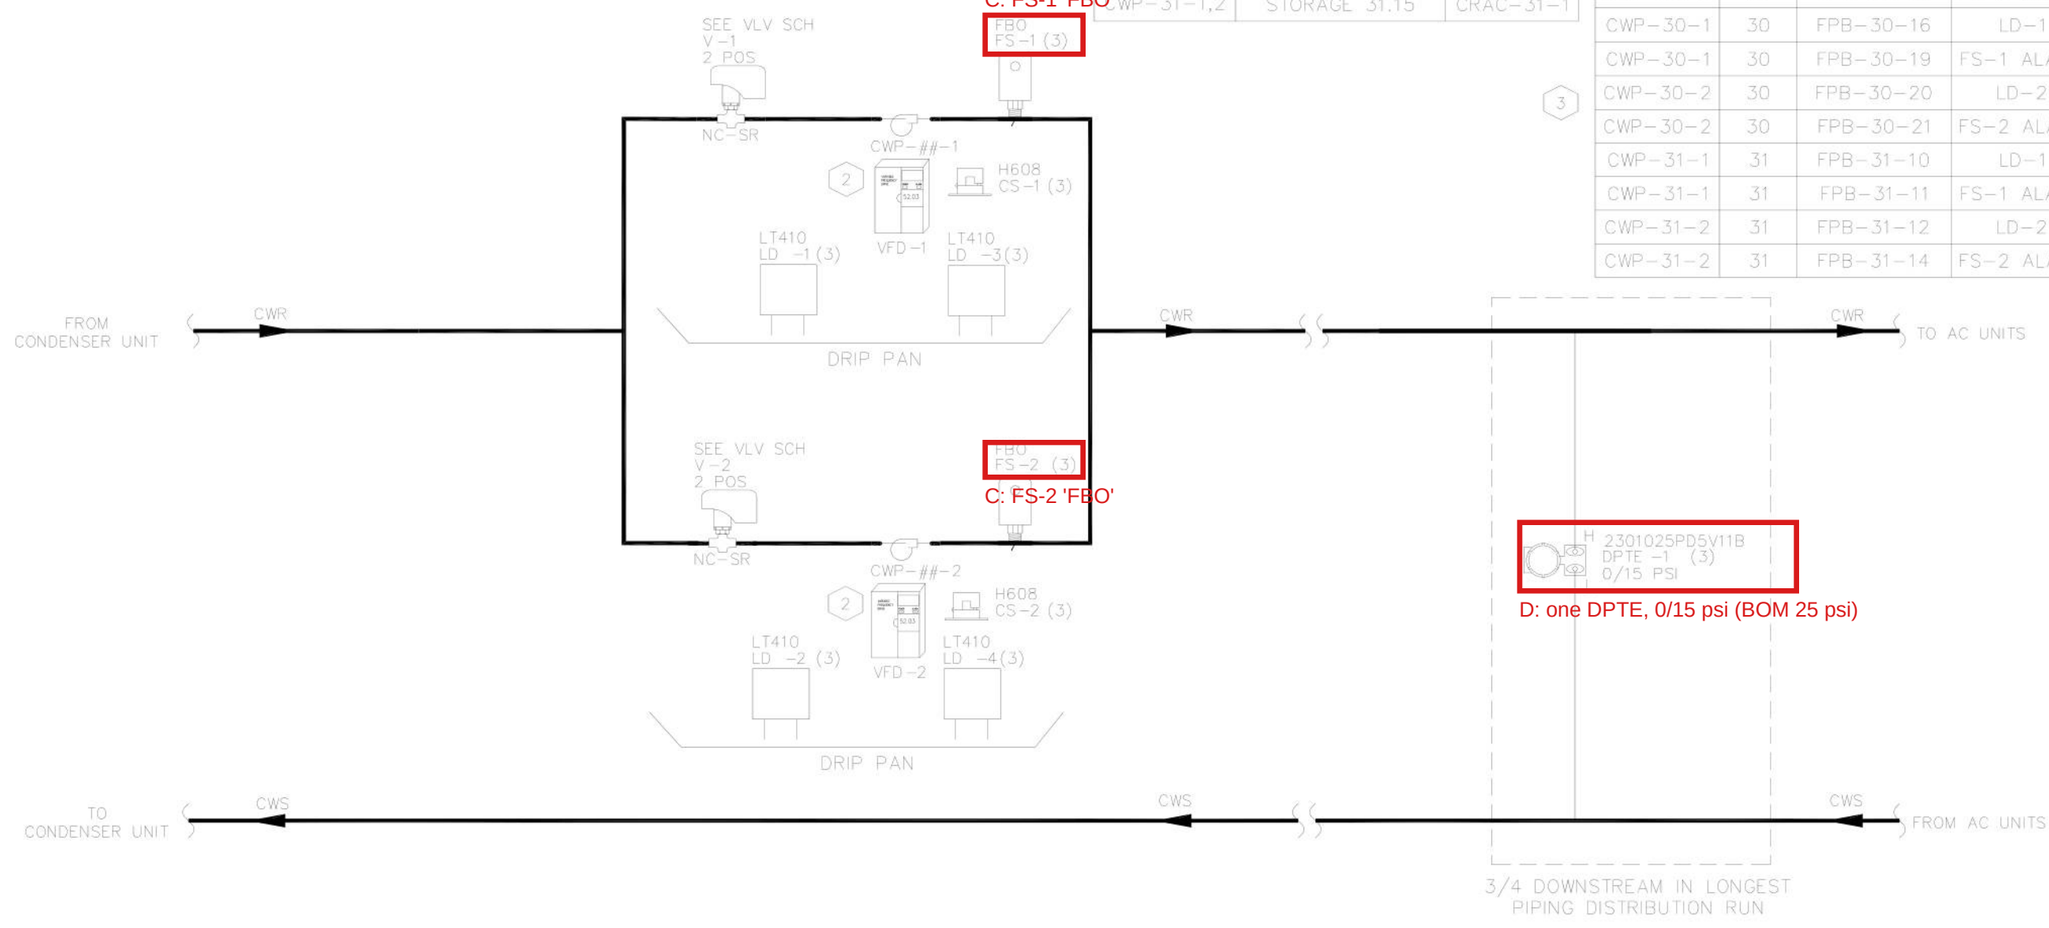

REVISION HISTORY			
R0	7/22/2026	PP	SUBMITTAL FOR APPROVAL

SIEMENS

SIEMENS INDUSTRY, INC.
SMART INFRASTRUCTURE

412 MT KEMBLE AVE
SUITE 200S
MORRISTOWN
NJ-07960 USA
PHONE: (973)575-6300
FAX: (973)575-7968

7TS 29-31 SNOWFLAKE
NEW YORK, NY

ENGINEER	DRAFTER	CHECKED BY	INITIAL RELEASE	LAST EDIT DATE
PP	PP	SN	07/22/26	07/22/26


CONDENSER WATER PUMPS(MECH)


440P-420147
0
300

© COPYRIGHT 1994-26 SIEMENS INDUSTRY, INC. All Rights Reserved

C:\JOBS\440P-420147\MDT\CWP.DWG

VDF WIRING

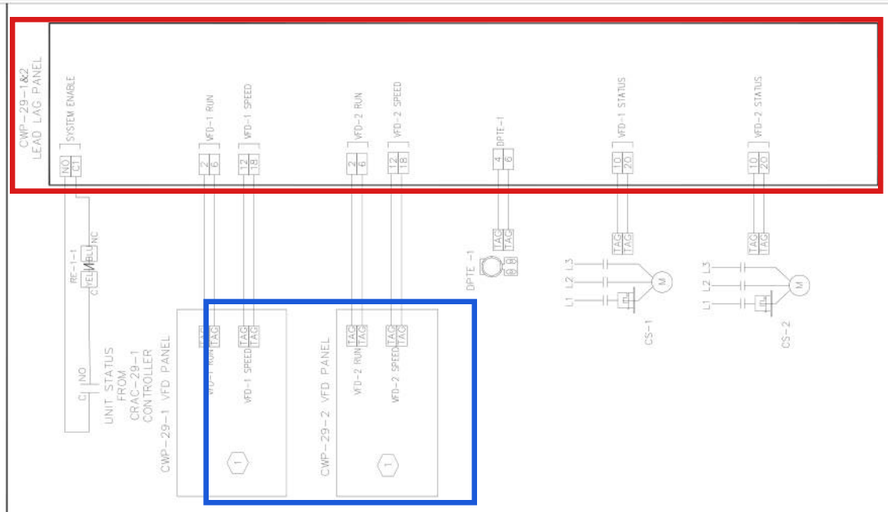


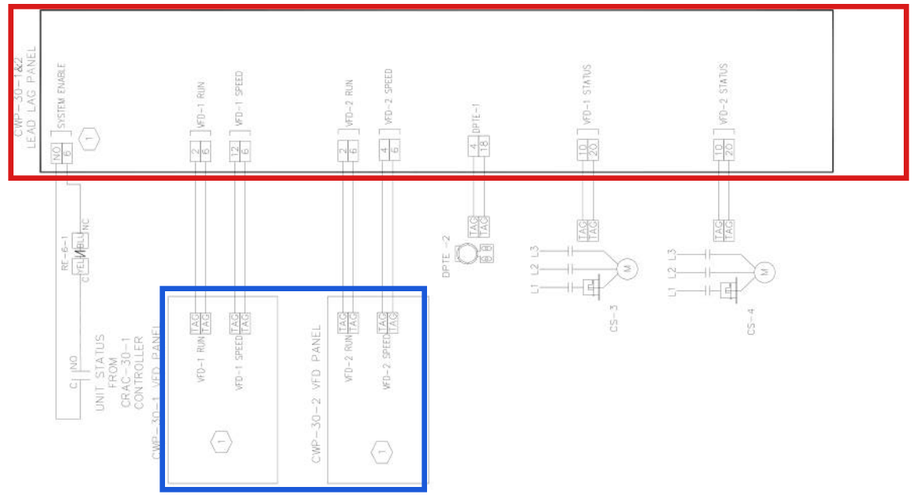

DRAWING NOTES:
1. TERMINATION DETAILS TO BE FIELD DETERMINED.
2. REFER DWG 300 FOR THE NEAREST DXR DETAILS.
3. ALL THE POINTS ARE CONNECTED TO DXR PROGRAM THRU SOFTWARE.

FIELD WIRING

FIELD PANEL

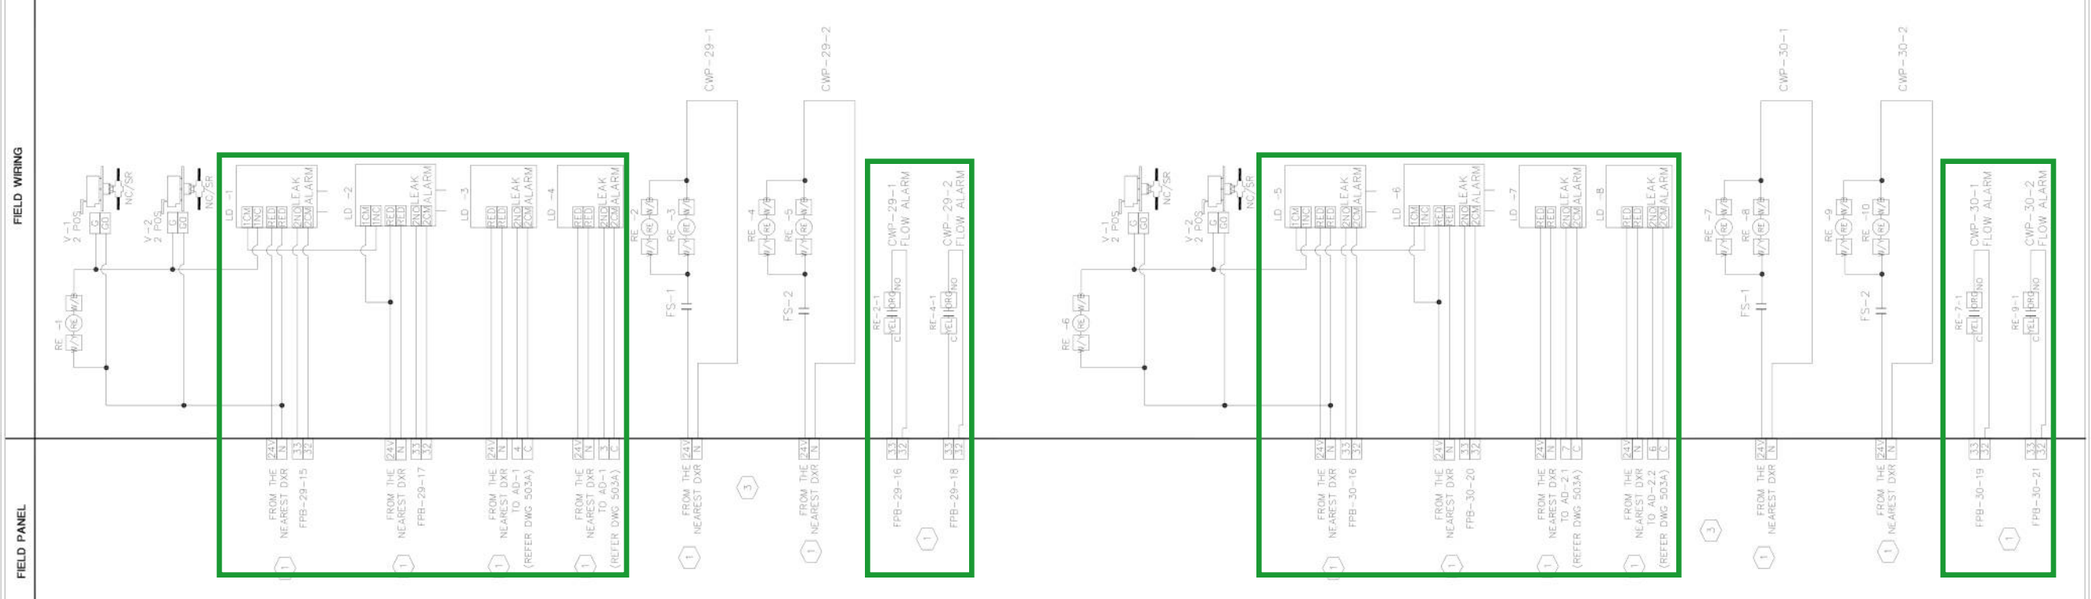

REVISION HISTORY

R0	7/22/2026	PP	SUBMITTAL FOR APPROVAL

SIEMENS

SIEMENS INDUSTRY, INC.
SMART INFRASTRUCTURE

412 MT KEMBLE AVE
SUITE 200S
MORRISTOWN
NJ-07960 USA
PHONE: (973)575-6300
FAX: (973)575-7968

7TS 29-31 SNOWFLAKE
NEW YORK, NY

ENGINEER	DRAFTER	CHECKED BY	INITIAL RELEASE	LAST EDIT DATE
PP	PP	SN	07/22/26	07/22/26


CONDENSER WATER PUMPS(ELEC-1)

440P-420147
0
300A

© COPYRIGHT 1994-26 SIEMENS INDUSTRY, INC. All Rights Reserved

C:\JOBS\440P-420147\MDT\CWPA.DWG

VDF WIRING

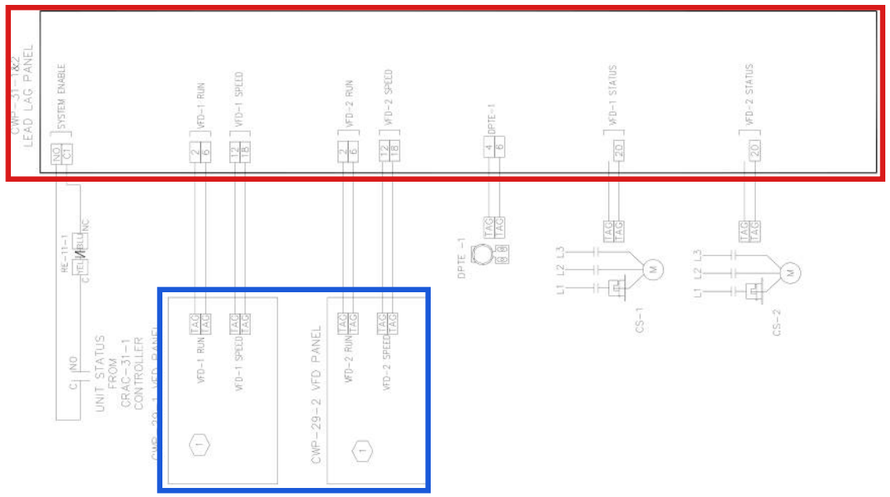


DRAWING NOTES:-

1. TERMINATION DETAILS TO BE FIELD DETERMINED.
2. REFER DWG 300 FOR THE NEAREST DXR DETAILS.
3. ALL THE POINTS ARE CONNECTED TO DXR PROGRAMMABLE I/O SOFTWARE.

FIELD WIRING

FIELD PANEL

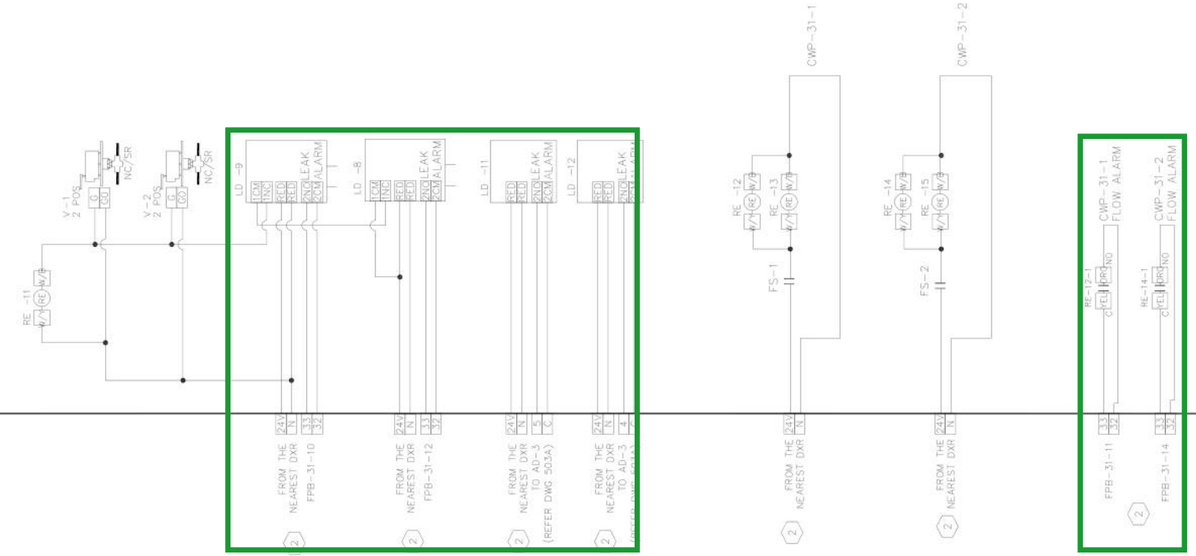

REVISION HISTORY

R0	7/22/2026	PP	SUBMITTAL FOR APPROVAL

SIEMENS

SIEMENS INDUSTRY, INC.
SMART INFRASTRUCTURE

412 MT KEMBLE AVE
SUITE 200S
MORRISTOWN
NJ-07960 USA
PHONE: (973)575-6300
FAX: (973)575-7968

7TS 29-31 SNOWFLAKE
NEW YORK, NY

ENGINEER	DRAFTER	CHECKED BY	INITIAL RELEASE	LAST EDIT DATE
PP	PP	SN	07/22/26	07/22/26

CONDENSER WATER PUMPS(ELEC-2)

440P-420147
0
300B

© COPYRIGHT 1994-26 SIEMENS INDUSTRY, INC. All Rights Reserved

C:\JOBS\440P-420147\MDT\CWPB.DWG

I: BOM - no flow switches, no panel, no horn/strobe, 1 DPTE/floor

Control Device		Qty	Product Number	Manufacturer	Document Number	Description
Field Mounted Devices						
CS	1-2	6	H608	VERIS	1006cut016	CUR SW SPLTCOR-ADJ SETPT W/LED
DPTE	1	3	2301025PD5V11B	SETRA SYST	N/A	DP TRAN,WET,25PSI,4-20MA,W/ 5VALVE MAN
LD	1-4	12	LT410	LIEBERT	N/A	POINT LEAK DETECTOR SENSOR
RE	1-5	15	RIBU1C	FUNCTIONAL DEVICES	1208cut013	RIB 120VAC 24VAC/DC SPDT
V						SEE VALVE SUBMITTAL

CONDENSER WATER PUMPS - SEQUENCE OF OPERATION:

a) CIRCULATING PUMP OPERATION SHALL BE INTERLOCKED WITH THE AC UNITS. UPON ACTIVATION OF ANY UNIT, THE LEAD CIRCULATING PUMP SHALL START AND RUN CONTINUOUSLY. THE PUMPS SHALL BE PROVIDED WITH AN AUTOMATIC RESTART AFTER A POWER OUTAGE.

b) PROVIDE FOR LEAD/LAG SEQUENCING IN ORDER TO HAVE ONE PUMP RUNNING AND THE OTHER AS STAND-BY. PUMPS [illegible] ADJUSTABLE) FOR EVEN WEAR.

J: 3c loss of flow -> standby + local audio/visual alarm

c) A FLOW SENSOR (ON DISCHARGE OF EACH PUMP) SHALL PROVE FLOW BEFORE STARTING ANY AIR CONDITIONING UNITS. A LOSS OF FLOW AS INDICATED BY THE FLOW SENSOR ON THE RUNNING PUMP SHALL SWITCH OPERATION TO THE STAND-BY PUMP AND ANNUNCIATE AN AUDIO/VISUAL ALARM LOCALLY.

d) PROVIDE A LEAK DETECTOR AT THE AUXILIARY DRAIN PAN OF EACH PUMP. LEAK DETECTION SHALL ANNUNCIATE AN AUDIO/VISUAL ALARM LOCALLY AND THROUGH THE LANDLORD BMS. IF MOISTURE IS DETECTED IN THE PAN OF THE OPERATING PUMP, THE PUMP SHALL STOP, AND THE STAND-BY PUMP SHALL START.

K: 3d leak -> local A/V + landlord BMS

e) SYSTEM DIFFERENTIAL PRESSURE WILL BE MAINTAINED BY VARIABLE SPEED DRIVES PROVIDED FOR EACH PUMP. THE PUMP SPEED SHALL MODULATE AS REQUIRED TO MAINTAIN A SYSTEM DIFFERENTIAL PRESSURE SETPOINT (ADJUSTABLE) AS SENSED BY A PIPE MOUNTED DIFFERENTIAL PRESSURE SENSOR. DIFFERENTIAL PRESSURE SENSOR TO BE MOUNTED 3/4 DOWNSTREAM IN THE LONGEST PIPING DISTRIBUTION RUN.

f) PROVIDE CONDENSER WATER PUMP SYSTEM WITH A 24 HOUR, 7 DAY TIMER TO INSURE PUMP OPERATION NOT LESS THAN 1 HOUR EVERY 4 HOURS.

L: 3f 24/7 timer, 1 h every 4 h

REVISION HISTORY

R0	7/22/2026	PP	SUBMITTAL FOR APPROVAL

SIEMENS

SIEMENS INDUSTRY, INC.
SMART INFRASTRUCTURE

412 MT KEMBLE AVE
SUITE 200S
MORRISTOWN
NJ-07960 USA
PHONE: (973)575-6300
FAX: (973)575-7968

7TS 29-31 SNOWFLAKE
NEW YORK, NY

ENGINEER	DRAFTER	CHECKED BY	INITIAL RELEASE	LAST EDIT DATE
PP	PP	SN	07/22/26	07/22/26

CONDENSER WATER PUMPS(BOM&SEQ)

440P-420147
0
300C

© COPYRIGHT 1994-26 SIEMENS INDUSTRY, INC. ALL RIGHTS RESERVED

C:\JOBS\440P-420147\MDT\CWP-K00.dwg