


Cable	Device	BLK	WHT	RED	GRN	Length
C1	duct temp/RH Mamac HU-226	R -> PWR+	C -> PWR-	RH OUT -> U2*	TEMP OUT -> U6*	20-60 ft
C2	duct CO2 Honeywell C7232B	R -> G+	C -> GO	OUT1 -> U9	M -> GND	20-60 ft
C3	high static cutoff switch	R -> N.C.	N.C. -> G	spare	spare	< 20 ft
SAT	discharge air temp (factory sensor)	lead 1 -> U4	lead 2 -> GND	-	-	factory lead

Wire colors are the usual 18/4 jacket set; if the spool differs, keep the same order: 24 V hot, common, signal 1, signal 2.

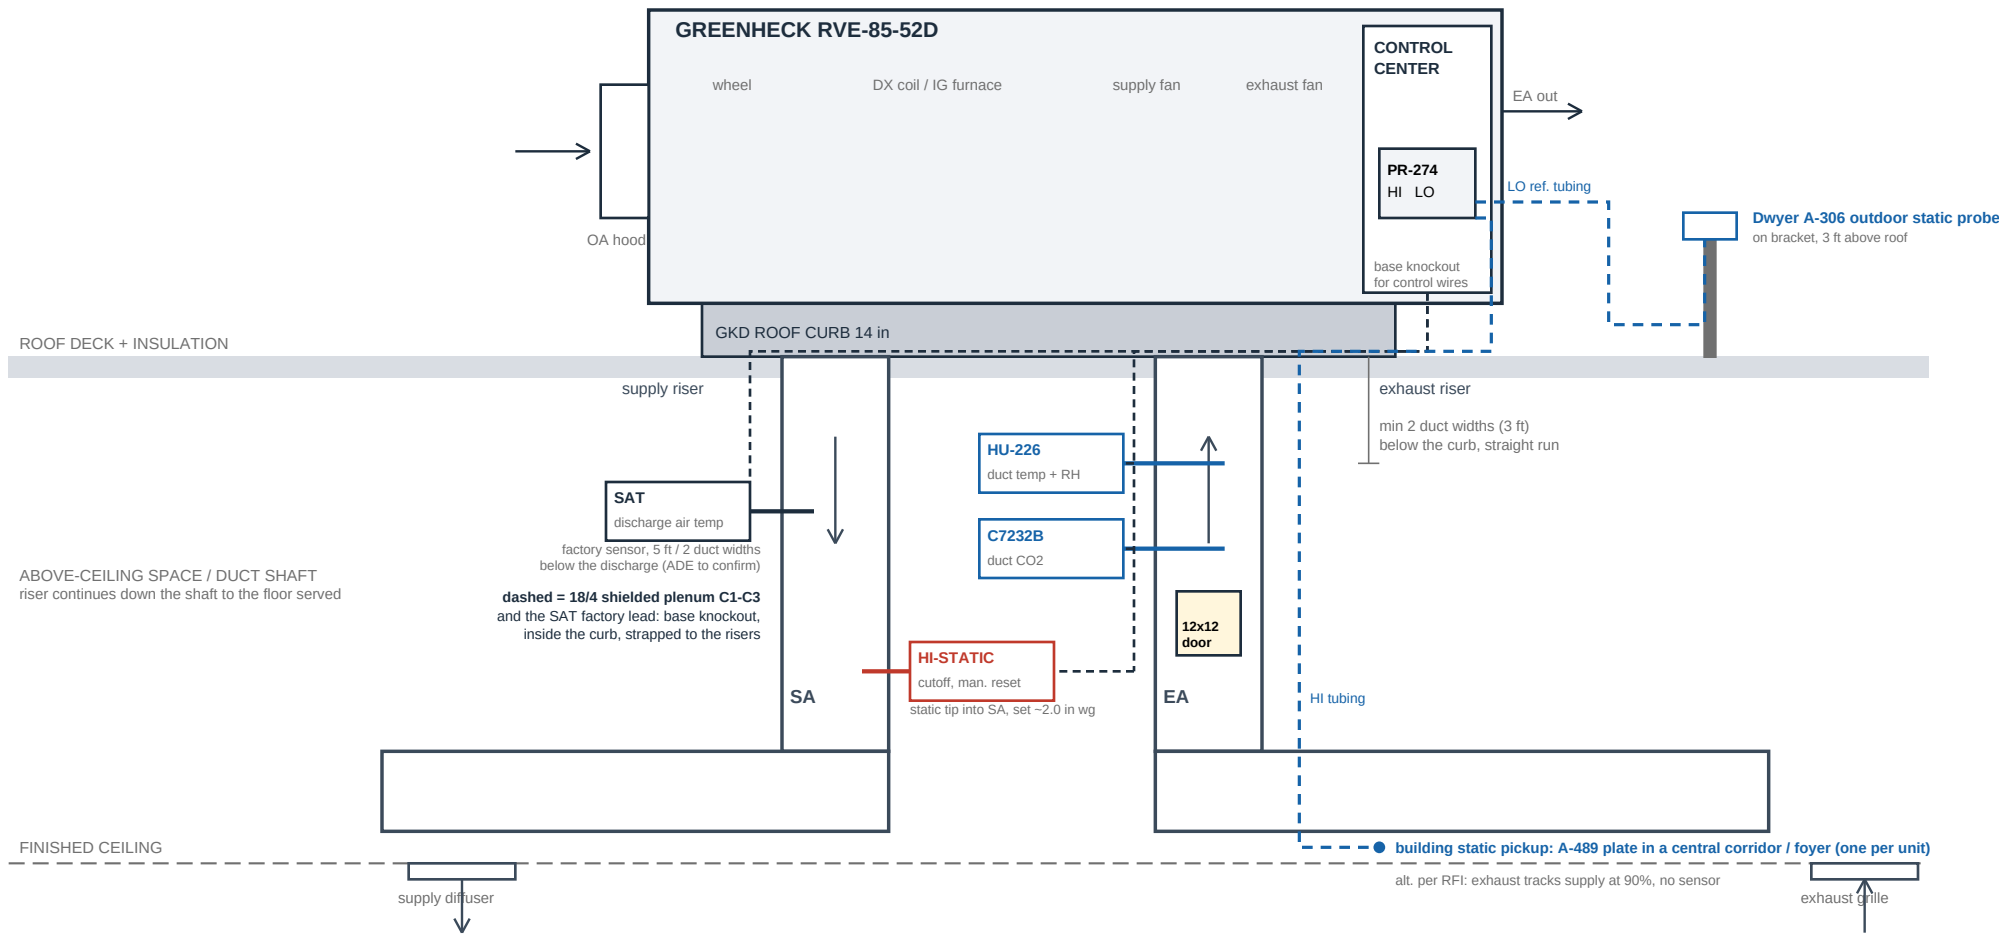

FLOOR OF THE SERVED SPACE (ERU-1, ERU-2: basement; ERU-3: first / second floor)

PLACEMENT NOTES

1. Temp/RH and CO2 sensors on the exhaust riser, first straight section reachable from inside the building: ERU-3 at the 2nd floor ceiling (grid 8.7-9.2), ERU-1 / ERU-2 at the top of the shaft under the roof deck.
2. Probes across the duct centerline through a gasketed hole; sensor housings outside the insulation; 12x12 access door within 2 ft. Nothing inside the curb or on the roof section of the duct.
3. High static cutoff on the supply riser 3-4 ft below the deck, static tip only (no low port). Manual reset, wired in series with the start circuit R-G (remove the S1 jumper).
4. PR-274 stays inside the control center. Two 1/4 in FR poly tubes: LO to the A-306 (on a post or the unit side, not the curb, away from EA louver and condenser), HI down the shaft to the space pickup. Both tubes and the 18/4 cables leave the unit through the base knockout.
Pickup = building pressure, one point per unit in a central corridor / foyer (ERU-3: foyer 102 or fellowship hall 113; ERU-1/2: corridor 015). Not in the EA duct (fan suction), vestibules, toilets, kitchen.
Preferred alternative (RFI to DMG): exhaust VFD tracks the supply VFD at 90% (schedule ratio 4,800/5,375 and 5,775/6,370); no transducer, tubing or roof probe, and the three units cannot fight over one building pressure.
5. Smoke detectors already installed and wired by the E.C. Remote displays deleted; owner access through the unit web UI (ADE to confirm network requirements).
6. Discharge air temp sensor (SAT): Greenheck sensor found in the unit, to be relocated into the supply riser below the deck, 5 ft / 2 duct widths downstream of the discharge so the air is mixed after the reheat coil. ADE to confirm the distance.