

- Scope
1. Furnish and install perimeter linear supply diffusers (48") along the window walls on floors 29, 30 and 31, as shown in the clouds on shop drawings M-529 / M-530 / M-531 SD R2.

2. Each diffuser in a plenum box O.D. 48x4x26 with 1/2" lining, connected with a new 12x10 branch (one 10x8) with volume damper and concealed operator (VD/CO), tapped into the existing perimeter supply main.

3. Existing perimeter mains remain; work starts at the new taps. Branch duct insulated, sealed and supported.

4. Air balancing of the new diffusers and revised shop drawings included per floor.

- Exclusions
1. Soffit and ceiling openings, framing, access panels, patching and painting (by GC).

2. Overtime / premium time.

3. Work not shown in the clouds on the SD R2 drawings.


Summary by floor

Floor	Linear diffusers	Material	Labor	Foreman	Air balancing	Shop drawings	Total
29th floor (M-529)	23	\$13,455	\$15,812.50	\$4,650	\$2,500	\$1,500	\$37,917.50
30th floor (M-530)	12	\$7,020	\$8,250	\$2,325	\$1,200	\$750	\$19,545
31st floor (M-531)	14	\$8,190	\$9,625	\$2,325	\$1,200	\$750	\$22,090
Total	49	\$28,665	\$33,687.50	\$9,300	\$4,900	\$3,000	\$79,552.50

Labor 269.5 MH at \$125.00; foreman 60 hr at \$155.00.

Change areas

Area	Location	Diffusers	CFM
29-1	North-east corner, W 42nd St / Broadway	4	1,200
29-2	Seventh Ave, north	3	800
29-3	Seventh Ave, Open Office 29.42	6	1,600
29-4	Broadway, north	2	400
29-5	Seventh Ave, south (north end of sheet B)	4	1,200
29-6	Seventh Ave, south	4	1,200
30-1	Seventh Ave, north	3	800
30-2	Seventh Ave, Open Office 30.35	5	1,300
30-3	South wall (W 41st St side)	4	1,200
31-1	Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51)	2	400
31-2	Seventh Ave, Huddle Rms 31.46 / 31.47	3	800
31-3	Seventh Ave, at IDF 31.44 (match line)	1	300
31-4	Seventh Ave, 7P Meeting Rm 31.43	3	900
31-5	Seventh Ave, south	3	800
31-6	Broadway, south	2	600
	Total	49	13,500

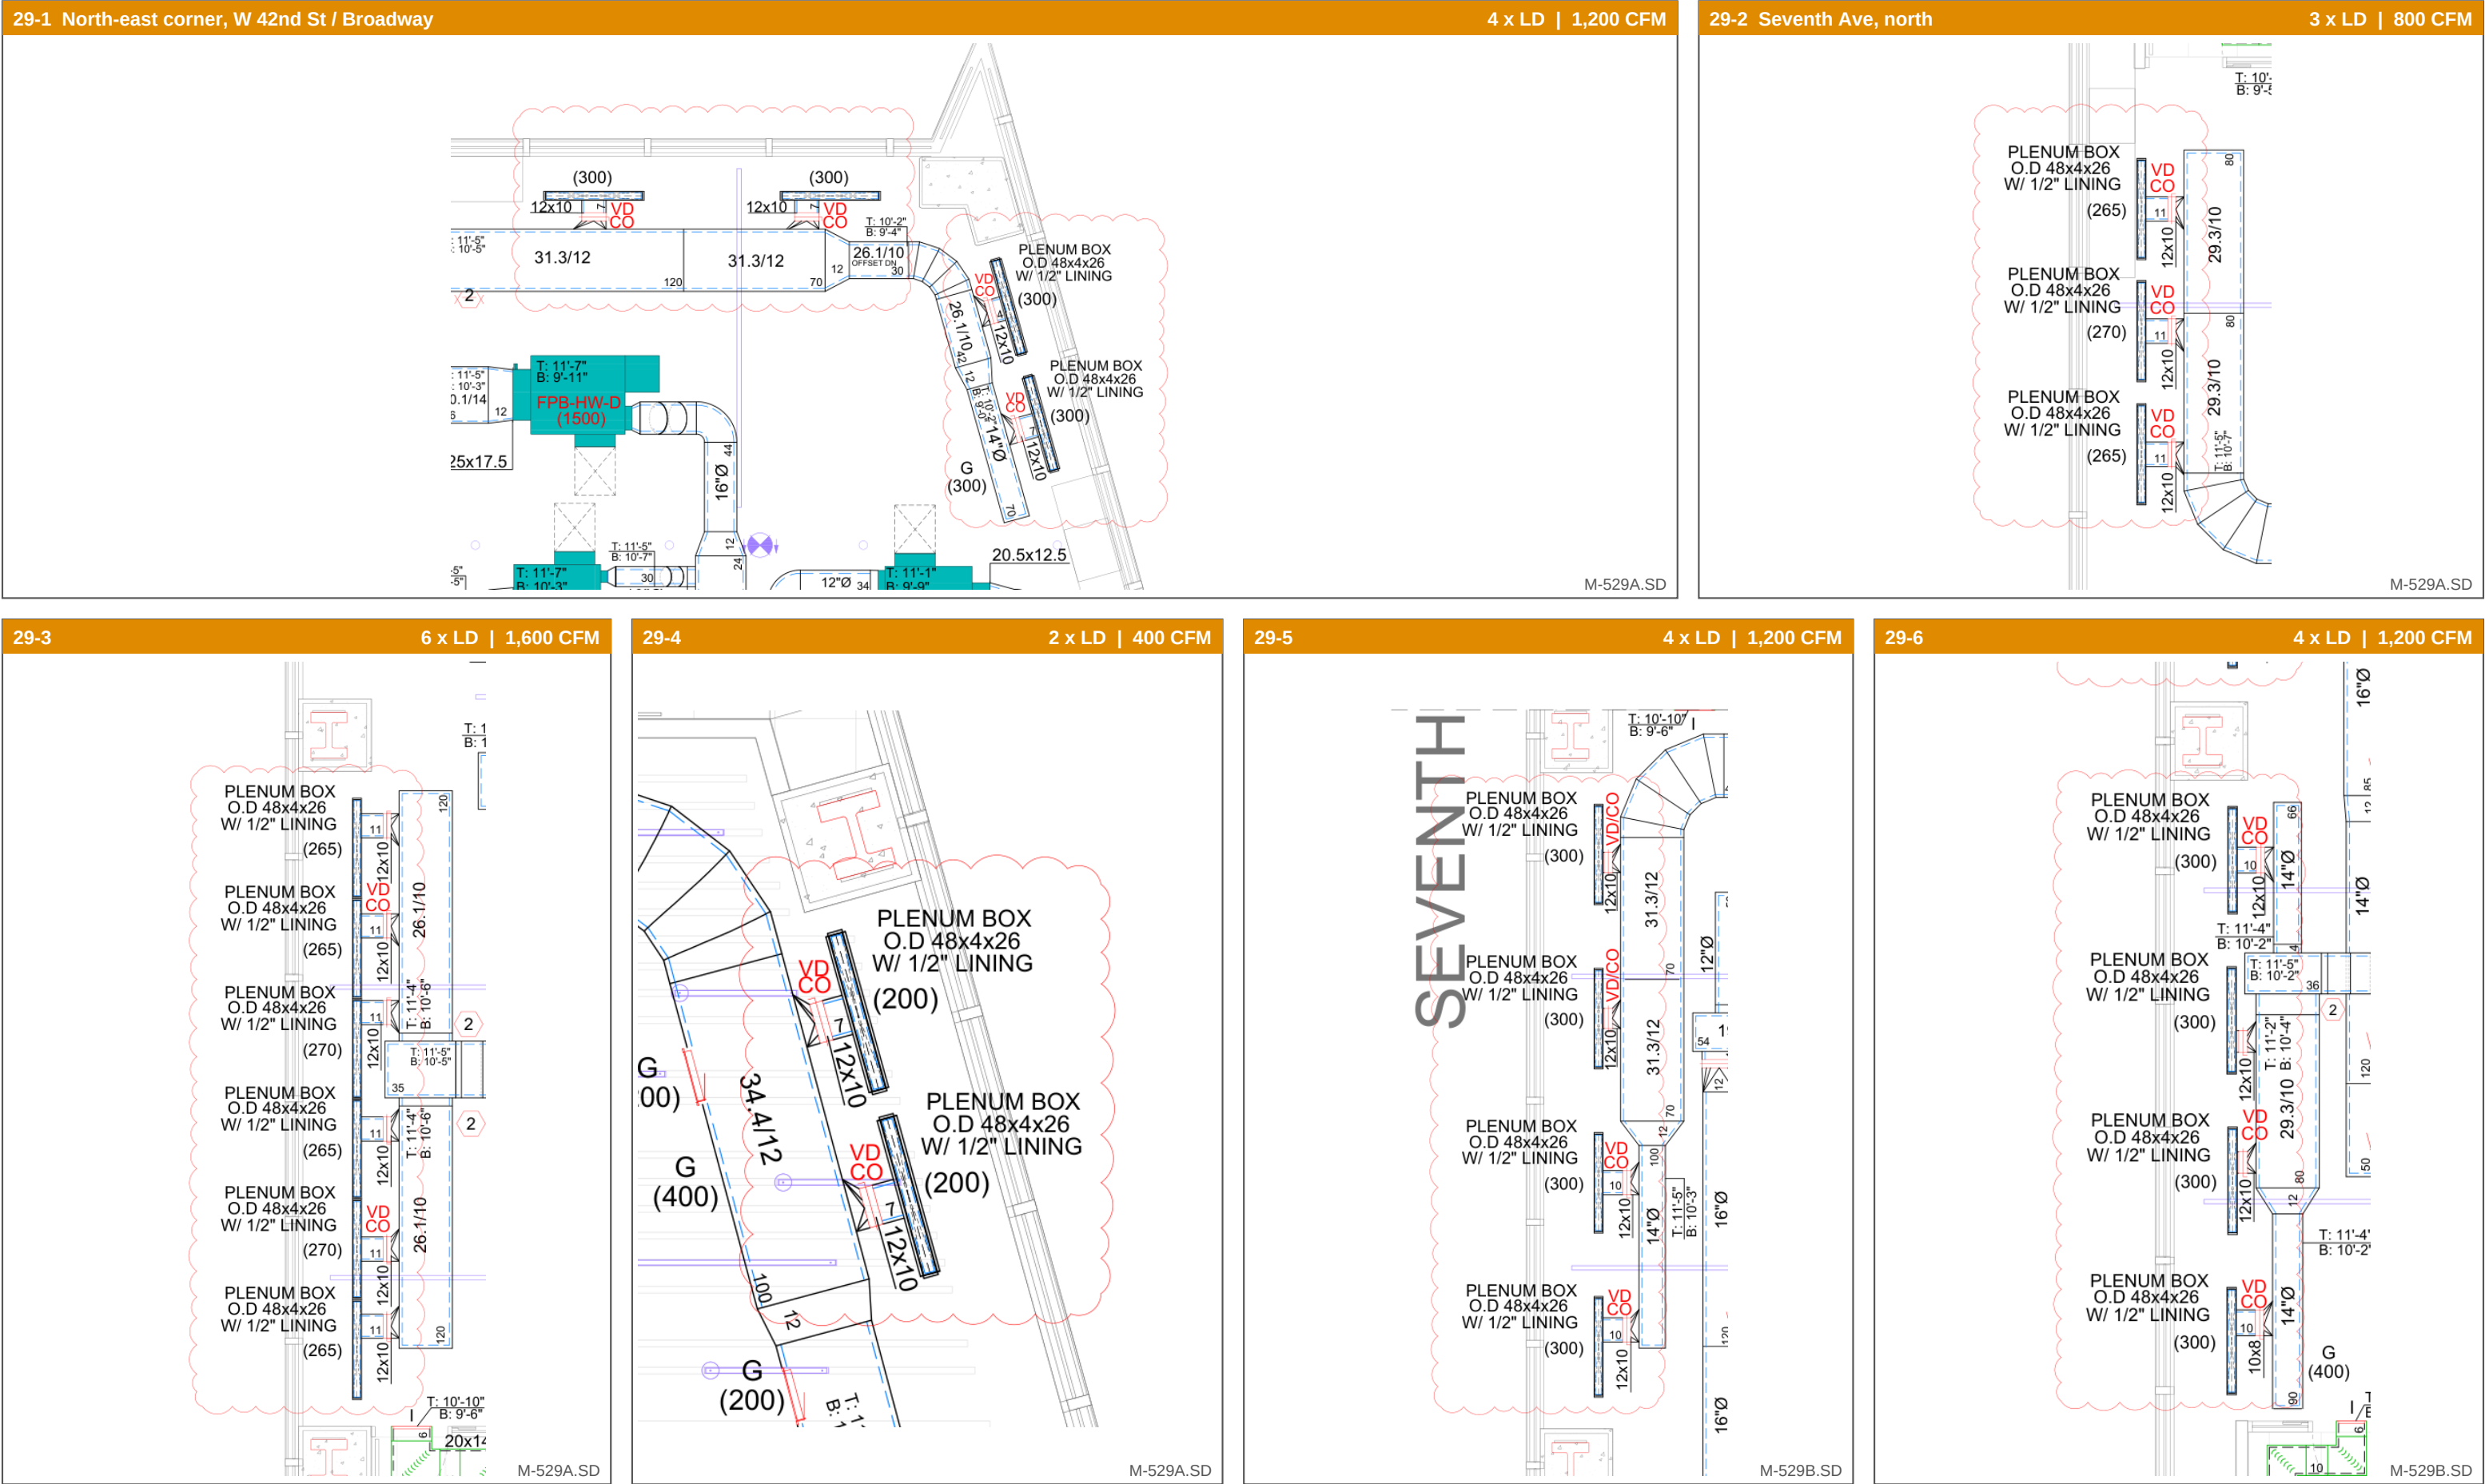

29th Floor - M-529 SD R2: Scope of Work and Cost Breakdown

Labor at \$125.00 per man-hour, foreman \$155.00 per hour | existing perimeter mains remain, work starts at the new taps



Snowflake Fitout - 7 Times Square, Floors 29-31 | Perimeter Linear Diffusers

Area	Scope of work	LD qty	CFM each (total)	Material	Labor	Total
29-1	North-east corner, W 42nd St / Broadway F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 4 x 12x10 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
29-2	Seventh Ave, north F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
29-3	Seventh Ave, Open Office 29.42 F&I 6 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 6 x 12x10 branch with VD/CO, insulation.	6	265 / 265 / 270 / 265 / 270 / 265 (1,600)	\$3,510	33 MH \$4,125	\$7,635
29-4	Broadway, north F&I 2 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 2 x 12x10 branch with VD/CO, insulation.	2	200 / 200 (400)	\$1,170	11 MH \$1,375	\$2,545
29-5	Seventh Ave, south (north end of sheet B) F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 4 x 12x10 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
29-6	Seventh Ave, south F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10, 1 x 10x8 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
	Foreman (layout, soffit coordination, supervision)				30 hr \$4,650	\$4,650
	Air balancing of new diffusers					\$2,500
	Shop drawings for revised design (SD R2)					\$1,500
	29th floor total	23	6,400	\$13,455	\$20,462.50	\$37,917.50


29th floor cost build-up

Item	Qty	Unit	Rate	Amount
Perimeter linear supply diffuser 48" (4 LF each)	92	LF	\$90	\$8,280
Plenum box O.D. 48x4x26 with 1/2" lining	23	EA	\$95	\$2,185
Branch duct from new tap to plenum box, fittings, insulation	23	EA	\$45	\$1,035
Volume damper with concealed operator (VD/CO)	23	EA	\$85	\$1,955
Labor: install diffusers, plenum boxes, taps, branches, VD/CO	126.5	MH	\$125	\$15,812.50
Foreman	30	HR	\$155	\$4,650
Air balancing	1	LS		\$2,500
Shop drawings	1	LS		\$1,500
29th floor total				\$37,917.50

Key plan

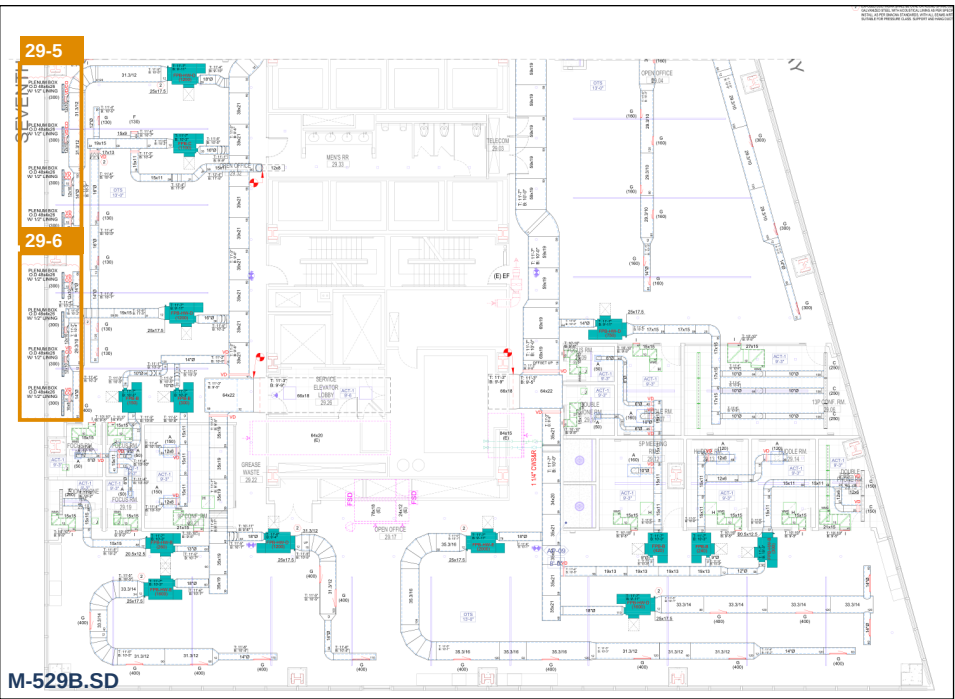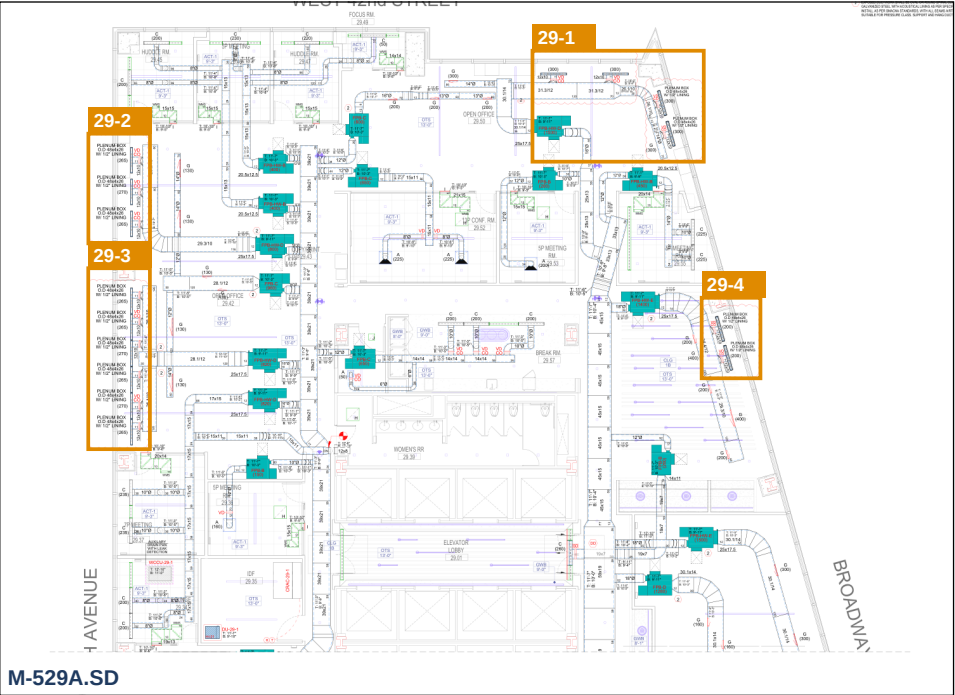

Floor	Total
29th floor	\$37,917.50
30th floor	\$19,545
31st floor	\$22,090
Total	\$79,552.50

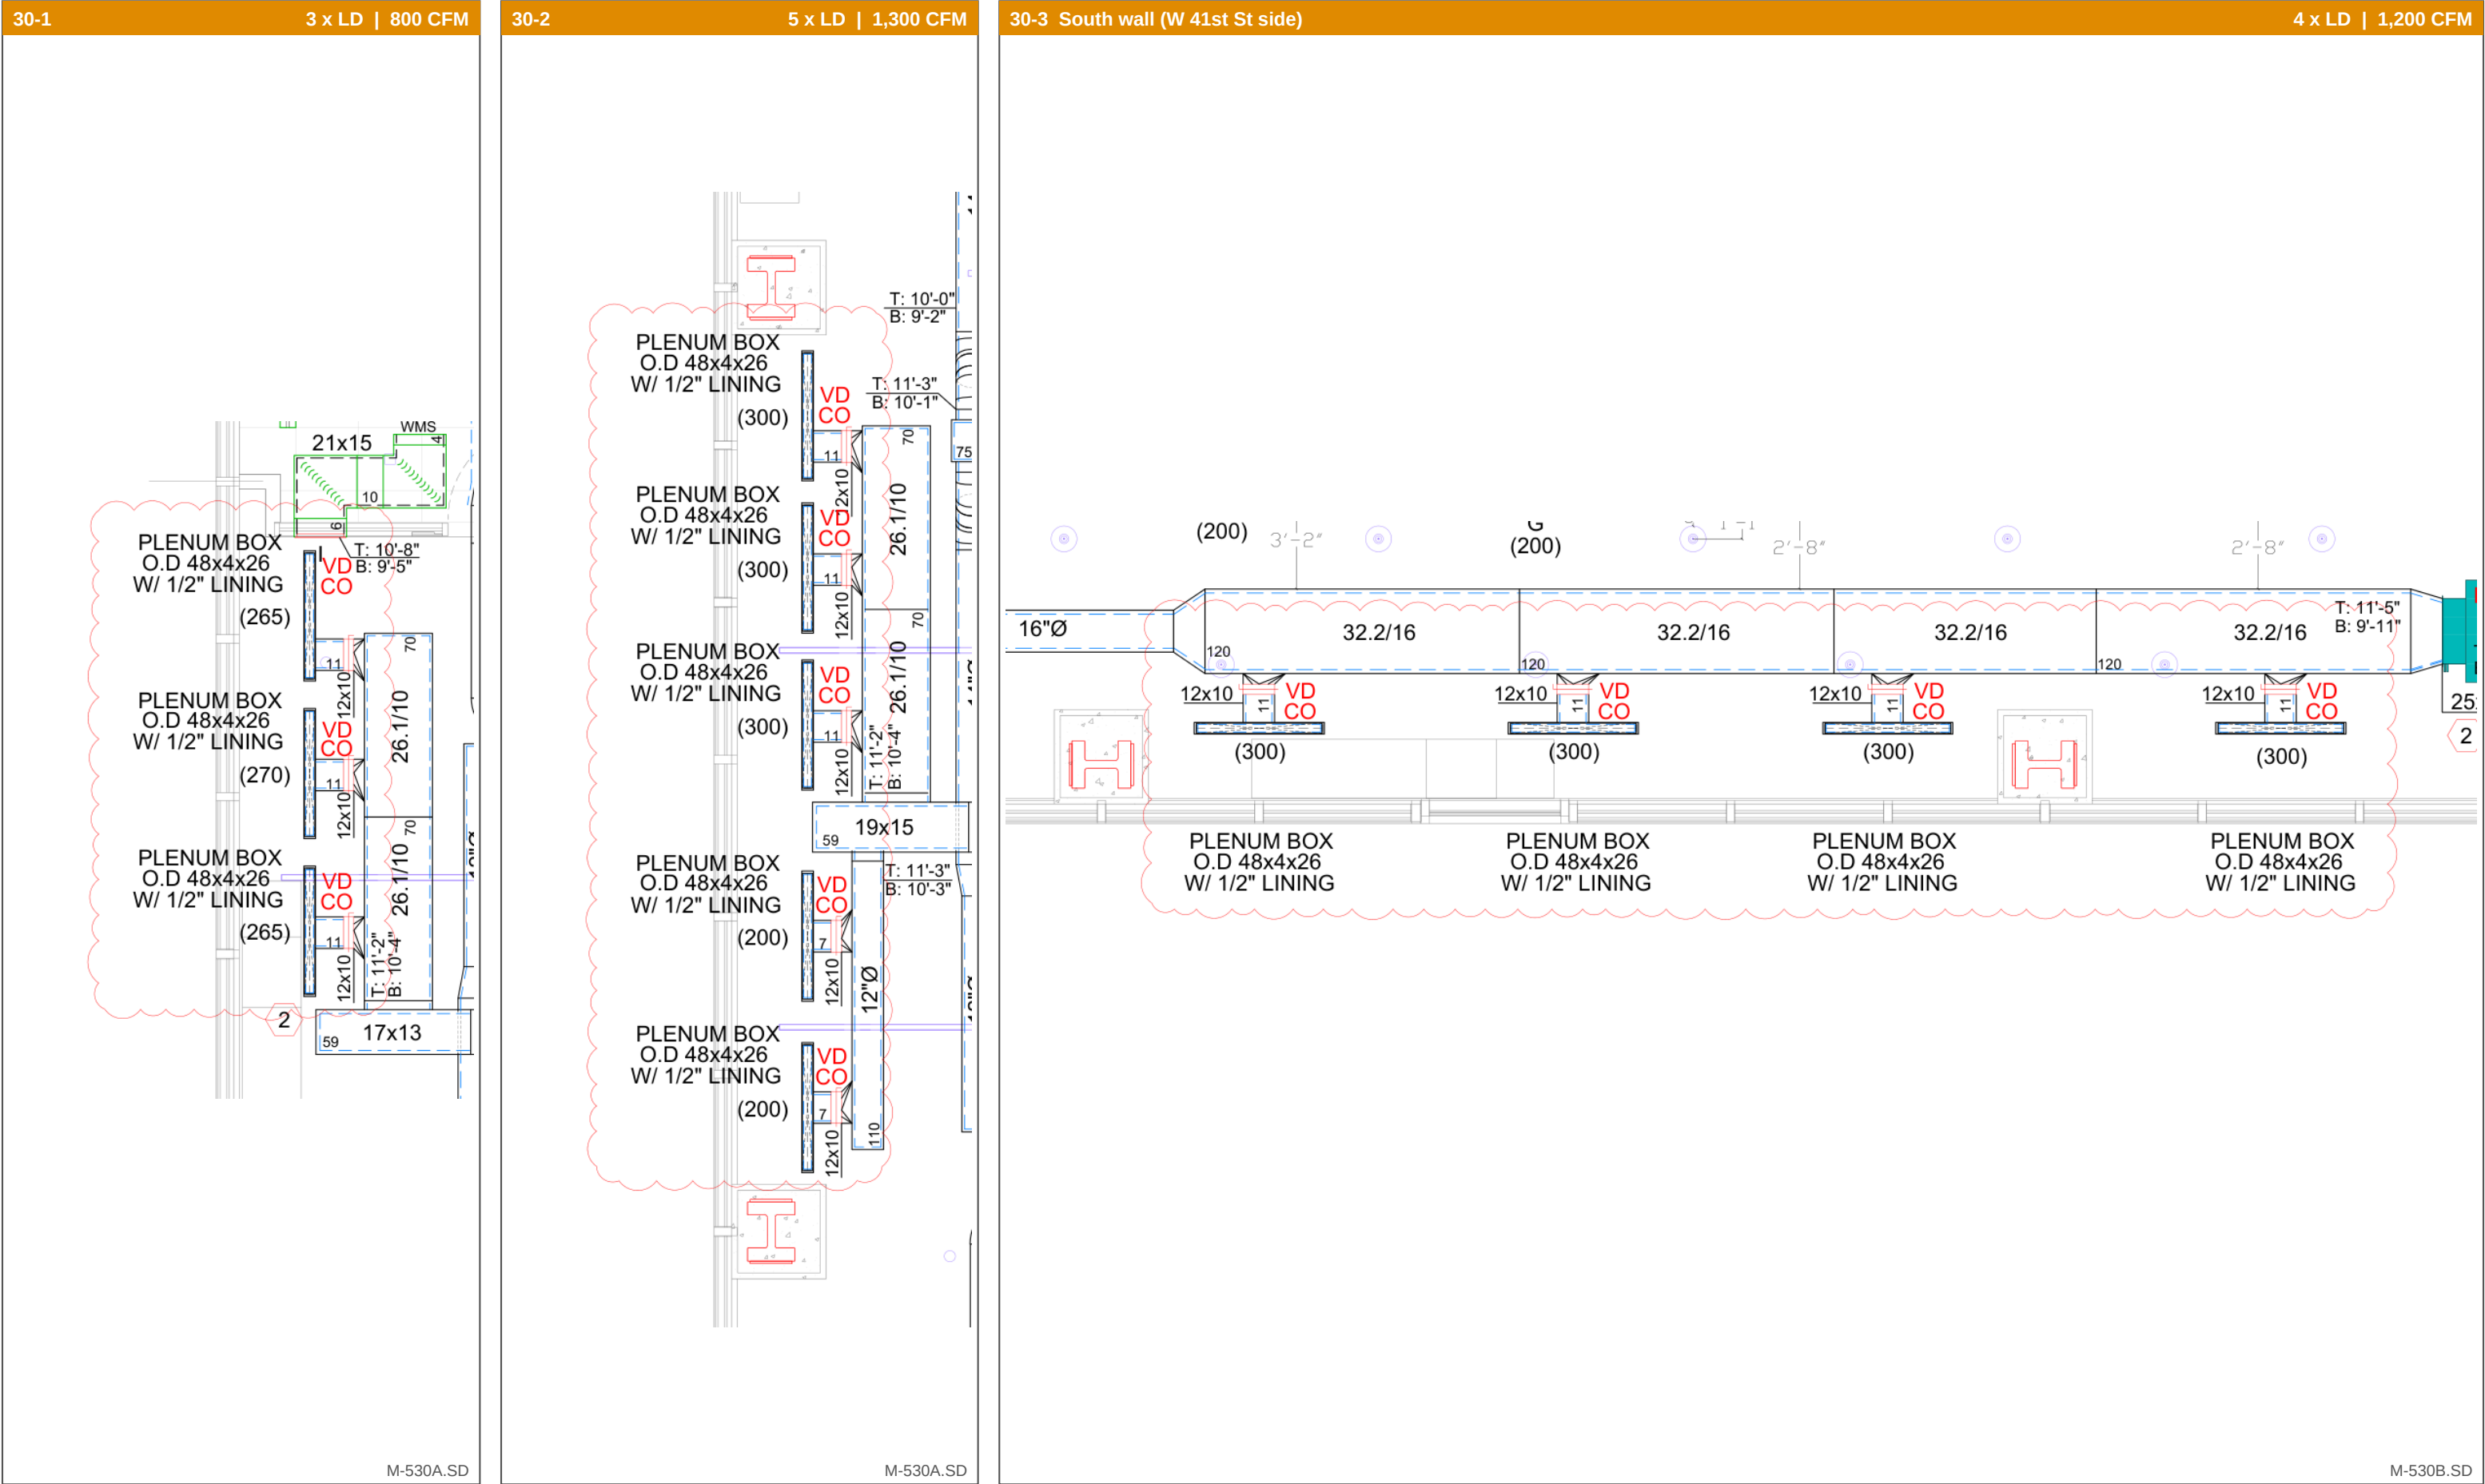

30th Floor - M-530 SD R2: Scope of Work and Cost Breakdown

Labor at \$125.00 per man-hour, foreman \$155.00 per hour | existing perimeter mains remain, work starts at the new taps

Area	Scope of work	LD qty	CFM each (total)	Material	Labor	Total
30-1	Seventh Ave, north F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
30-2	Seventh Ave, Open Office 30.35 F&I 5 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 5 x 12x10 branch with VD/CO, insulation.	5	300 / 300 / 300 / 200 / 200 (1,300)	\$2,925	27.5 MH \$3,437.50	\$6,362.50
30-3	South wall (W 41st St side) F&I 4 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 4 x 12x10 branch with VD/CO, insulation.	4	300 / 300 / 300 / 300 (1,200)	\$2,340	22 MH \$2,750	\$5,090
	Foreman (layout, soffit coordination, supervision)				15 hr \$2,325	\$2,325
	Air balancing of new diffusers					\$1,200
	Shop drawings for revised design (SD R2)					\$750
	30th floor total	12	3,300	\$7,020	\$10,575	\$19,545


30th floor cost build-up

Item	Qty	Unit	Rate	Amount
Perimeter linear supply diffuser 48" (4 LF each)	48	LF	\$90	\$4,320
Plenum box O.D. 48x4x26 with 1/2" lining	12	EA	\$95	\$1,140
Branch duct from new tap to plenum box, fittings, insulation	12	EA	\$45	\$540
Volume damper with concealed operator (VD/CO)	12	EA	\$85	\$1,020
Labor: install diffusers, plenum boxes, taps, branches, VD/CO	66	MH	\$125	\$8,250
Foreman	15	HR	\$155	\$2,325
Air balancing	1	LS		\$1,200
Shop drawings	1	LS		\$750
30th floor total				\$19,545

Key plan



M-530A.SD

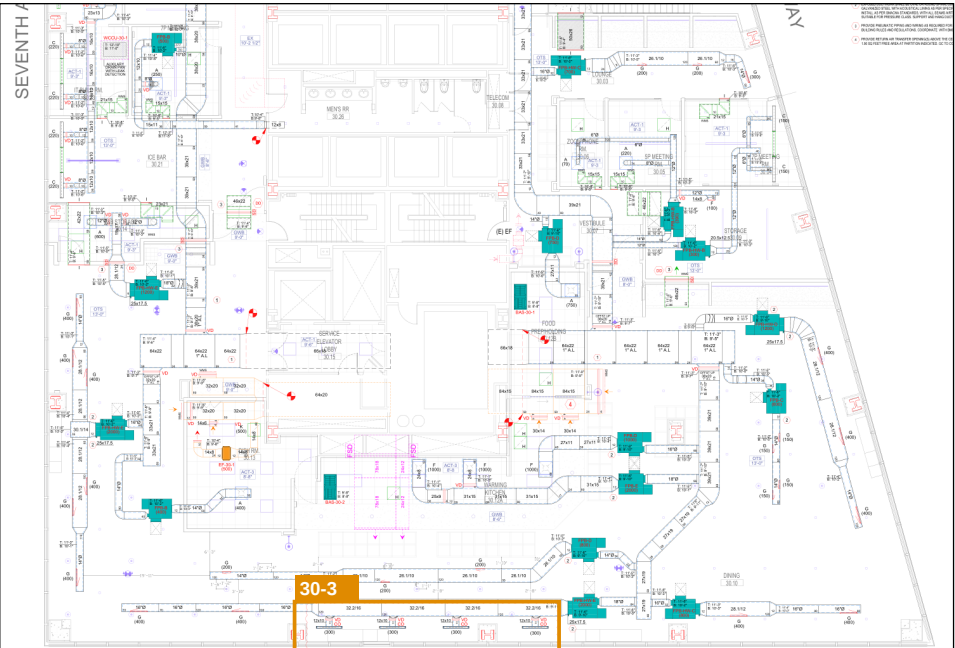


M-530B.SD

Floor	Total
29th floor	\$37,917.50
30th floor	\$19,545
31st floor	\$22,090
Total	\$79,552.50


31-1 Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51)

2 x LD | 400 CFM

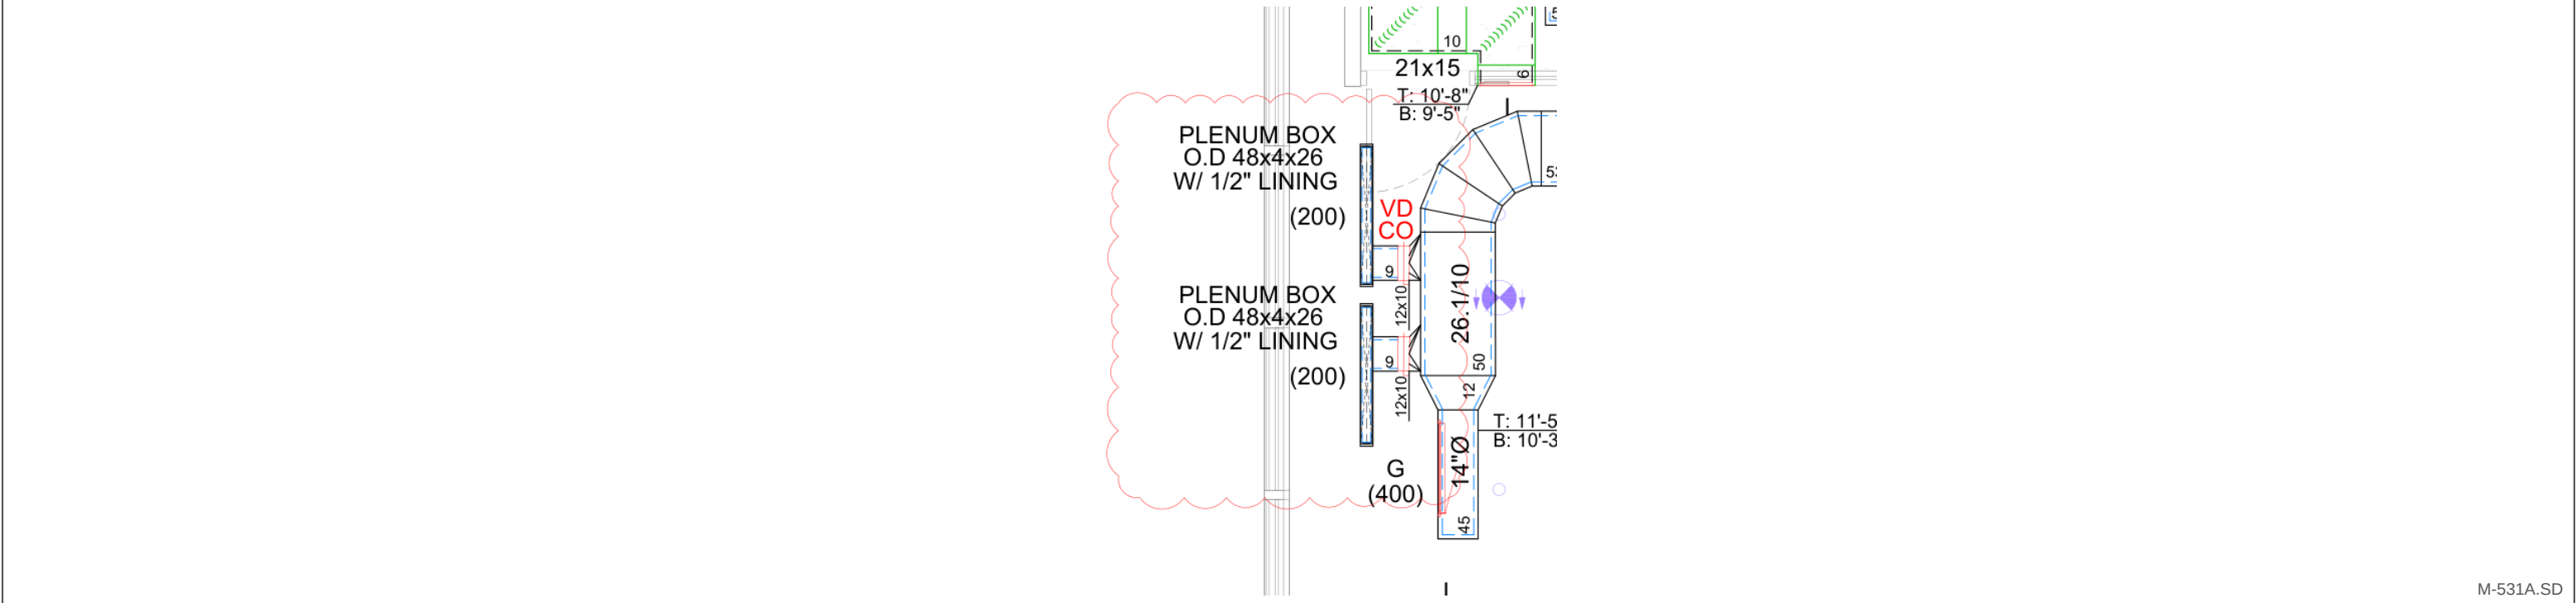


31-2

3 x LD | 800 CFM

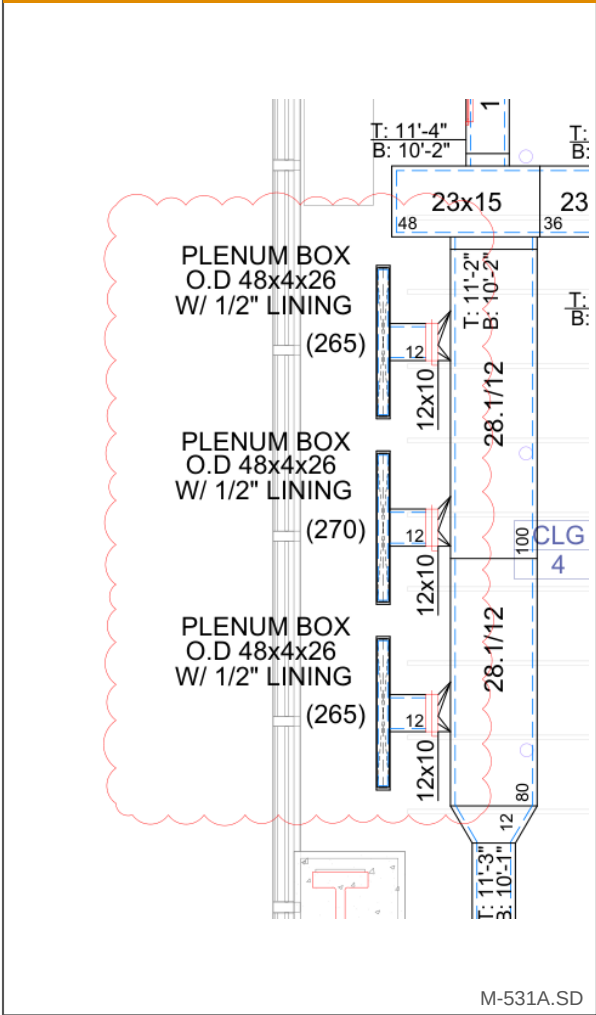


31-3

1 x LD | 300 CFM

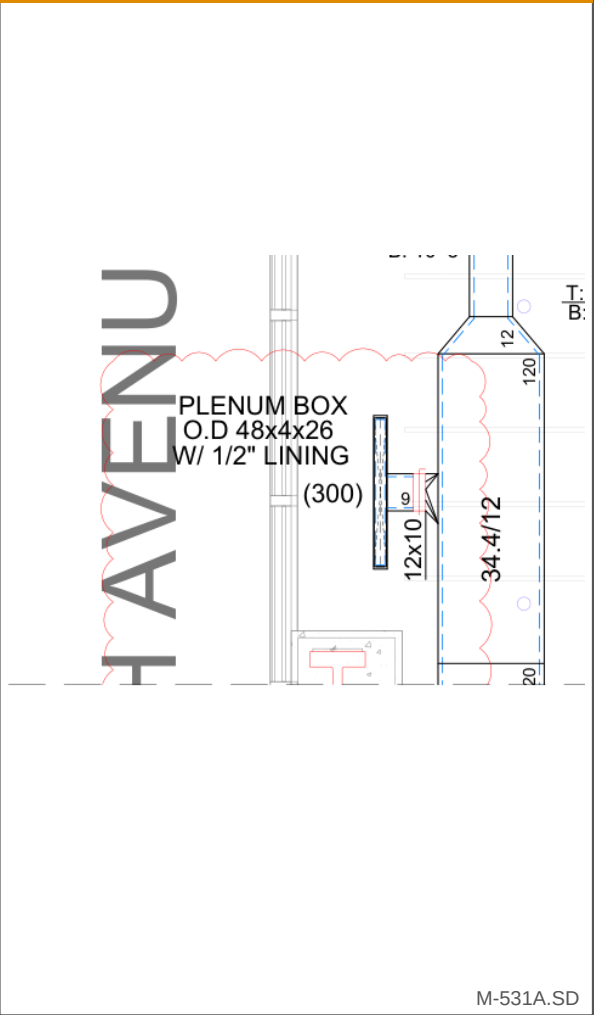


31-4

3 x LD | 900 CFM

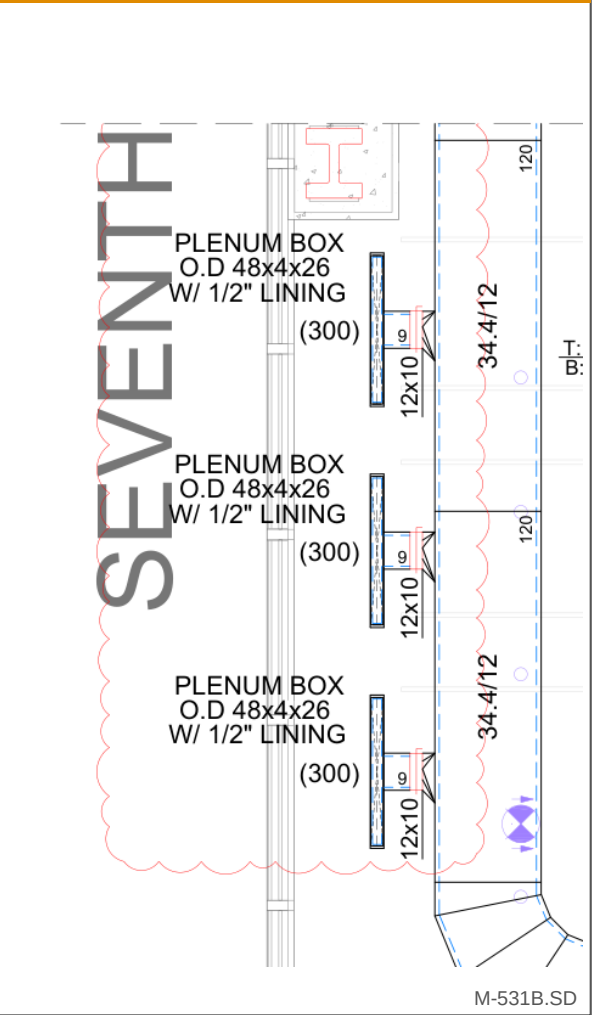


31-5

3 x LD | 800 CFM

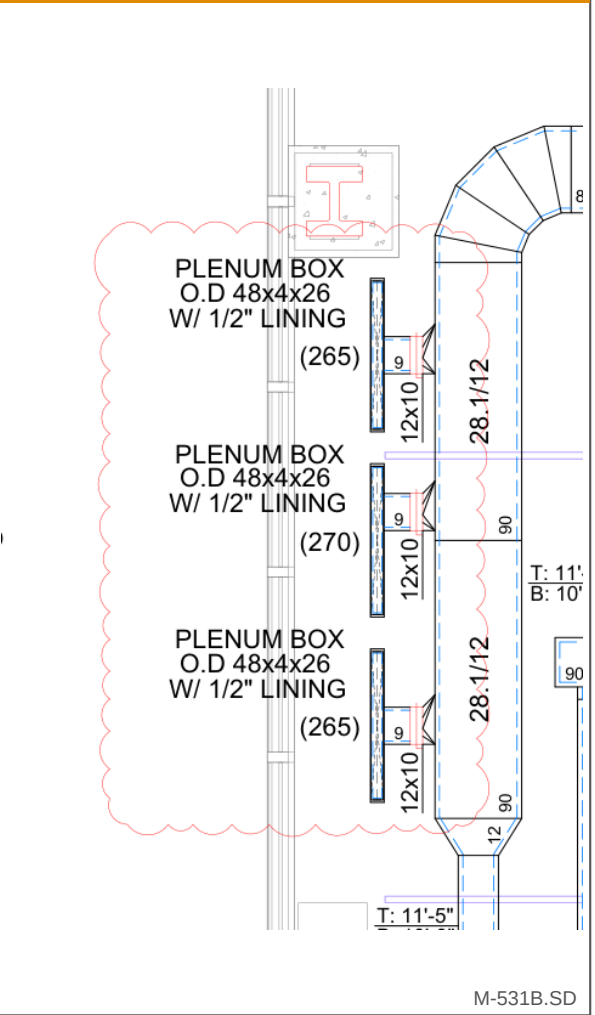

31-6

2 x LD | 600 CFM

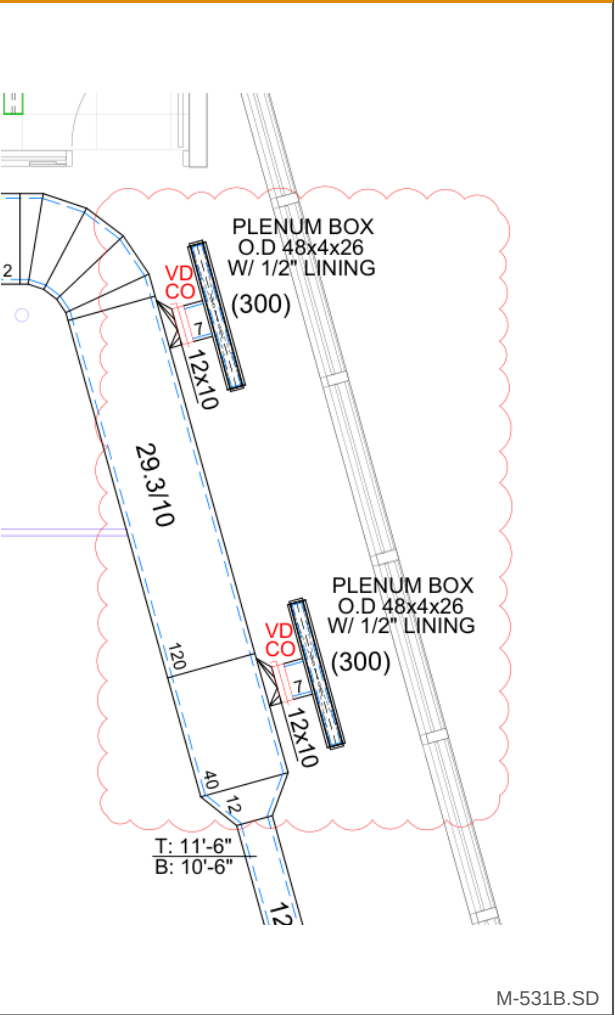

31st Floor - M-531 SD R2: Scope of Work and Cost Breakdown

Labor at \$125.00 per man-hour, foreman \$155.00 per hour | existing perimeter mains remain, work starts at the new taps


Snowflake Fitout - 7 Times Square, Floors 29-31 | Perimeter Linear Diffusers

Area	Scope of work	LD qty	CFM each (total)	Material	Labor	Total
31-1	Seventh Ave, north (Focus Rm 31.65 / Corridor 31.51) F&I 2 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 2 x 12x10 branch with VD/CO, insulation.	2	200 / 200 (400)	\$1,170	11 MH \$1,375	\$2,545
31-2	Seventh Ave, Huddle Rms 31.46 / 31.47 F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
31-3	Seventh Ave, at IDF 31.44 (match line) F&I 1 perimeter linear diffuser 48" with plenum box O.D. 48x4x26 lined; new tap on existing main, 1 x 12x10 branch with VD/CO, insulation.	1	300 (300)	\$585	5.5 MH \$687.50	\$1,272.50
31-4	Seventh Ave, 7P Meeting Rm 31.43 F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	300 / 300 / 300 (900)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
31-5	Seventh Ave, south F&I 3 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 3 x 12x10 branch with VD/CO, insulation.	3	265 / 270 / 265 (800)	\$1,755	16.5 MH \$2,062.50	\$3,817.50
31-6	Broadway, south F&I 2 perimeter linear diffusers 48" with plenum boxes O.D. 48x4x26 lined; new taps on existing main, 2 x 12x10 branch with VD/CO, insulation.	2	300 / 300 (600)	\$1,170	11 MH \$1,375	\$2,545
	Foreman (layout, soffit coordination, supervision)				15 hr \$2,325	\$2,325
	Air balancing of new diffusers					\$1,200
	Shop drawings for revised design (SD R2)					\$750
	31st floor total	14	3,800	\$8,190	\$11,950	\$22,090


31st floor cost build-up

Item	Qty	Unit	Rate	Amount
Perimeter linear supply diffuser 48" (4 LF each)	56	LF	\$90	\$5,040
Plenum box O.D. 48x4x26 with 1/2" lining	14	EA	\$95	\$1,330
Branch duct from new tap to plenum box, fittings, insulation	14	EA	\$45	\$630
Volume damper with concealed operator (VD/CO)	14	EA	\$85	\$1,190
Labor: install diffusers, plenum boxes, taps, branches, VD/CO	77	MH	\$125	\$9,625
Foreman	15	HR	\$155	\$2,325
Air balancing	1	LS		\$1,200
Shop drawings	1	LS		\$750
31st floor total				\$22,090

Key plan

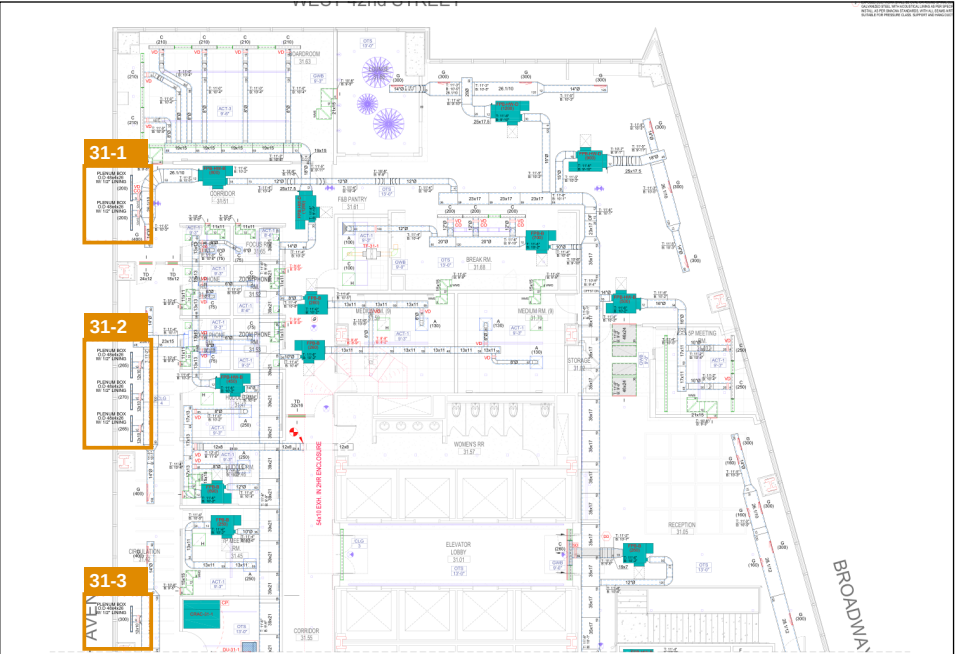

M-531A.SD

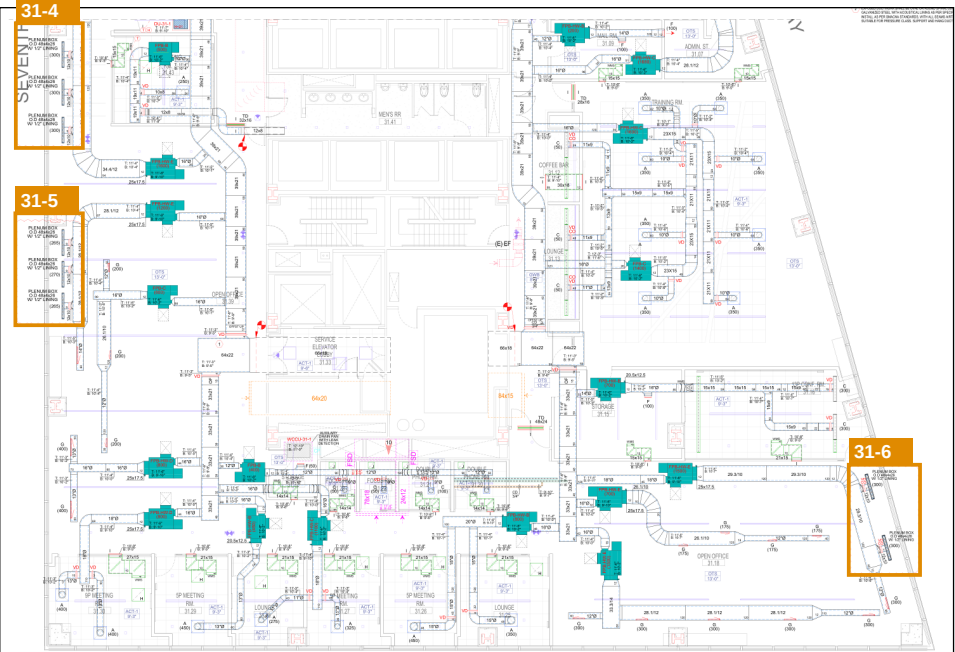

M-531B.SD

Floor	Total
29th floor	\$37,917.50
30th floor	\$19,545
31st floor	\$22,090
Total	\$79,552.50